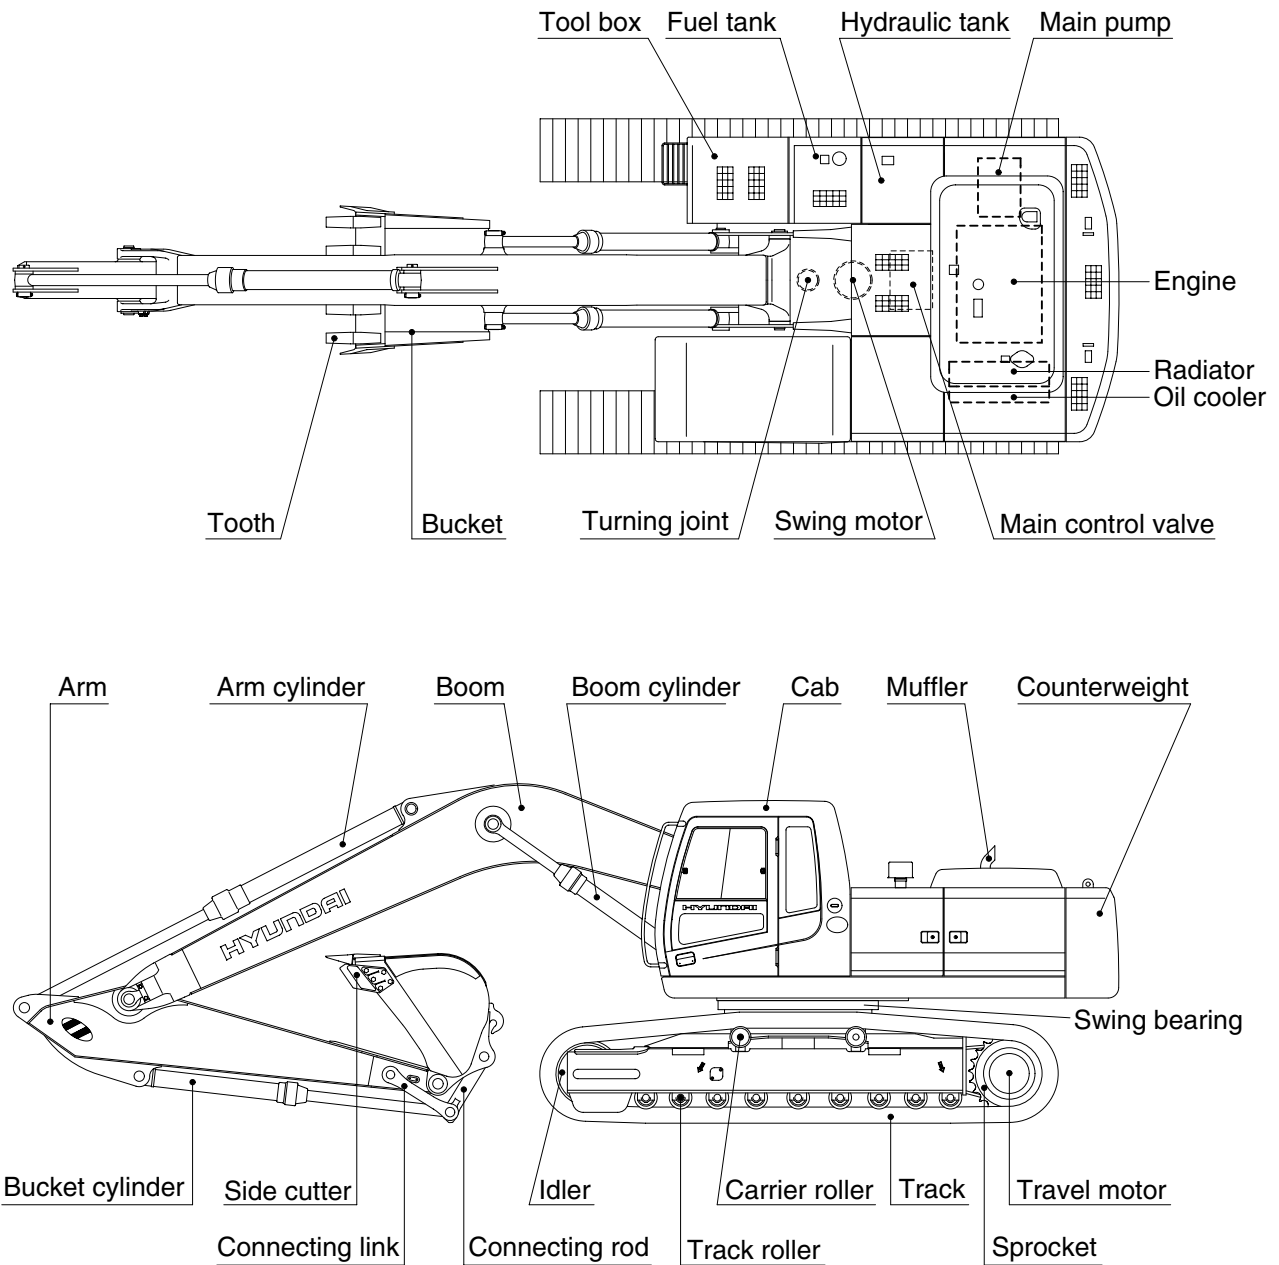


SPECIFICATIONS

1. MAJOR COMPONENT

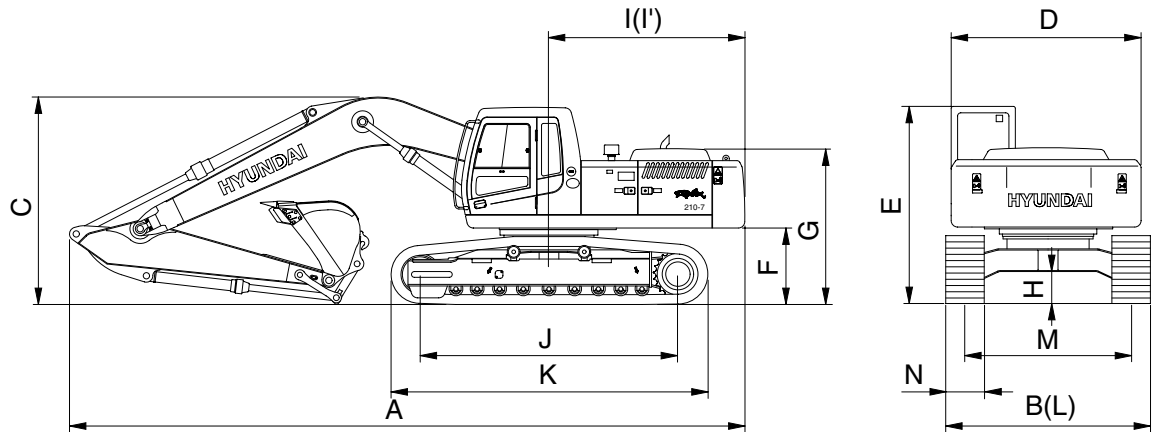


RD2107V2SP01

2. SPECIFICATIONS

1) ROBEX 210-7V

· 5.68m (18' 8") BOOM, 2.4m (7' 10") ARM WITH 500mm TRACK SHOE

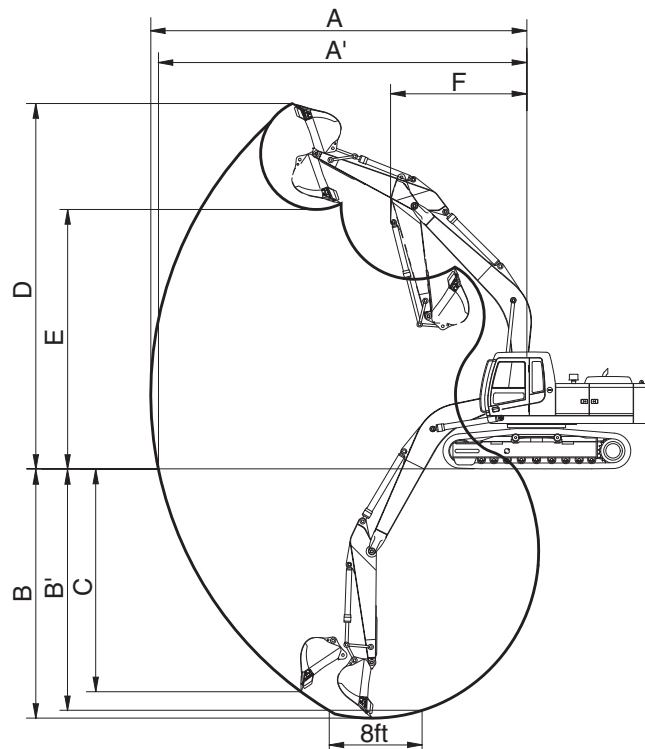


RD2107V2SP02

Description		Unit	Specification
Operating weight		kg(lb)	21000(46300)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.92(1.20)
Overall length	A	mm(ft-in)	9570(31' 5")
Overall width, with 500mm shoe	B		2700(8' 10")
Overall height	C		3110(10' 2")
Superstructure width	D		2700(8' 10")
Overall height of cab	E		2920(9' 7")
Ground clearance of counterweight	F		1060(3' 6")
Engine cover height	G		2320(7' 7")
Minimum ground clearance	H		480(1' 7")
Rear-end distance	I		2770(9' 1")
Rear-end swing radius	I'		2830(9' 3")
Distance between tumblers	J		3370(11' 1")
Undercarriage length	K		4160(13' 8")
Undercarriage width	L		2700(8' 10")
Track gauge	M		2200(7' 3")
Track shoe width, standard	N		500(20")
Travel speed(Low/high)		km/hr(mph)	3.5/5.2(2.2/3.2)
Swing speed		rpm	11.0
Gradeability		Degree(%)	35(70)
Ground pressure(500mm shoe)		kgf/cm ² (psi)	0.56(7.97)

3. WORKING RANGE

1) R210-7V [5.68m(18' 8") BOOM]



21072SP03

Description		*2.40m(7' 10") Arm	2.92m(9' 7") Arm
Max digging reach	A	9500mm (31' 2")	9940mm (32' 7")
Max digging reach on ground	A'	9330mm (30' 7")	9780mm (32' 1")
Max digging depth	B	6220mm (20' 5")	6740mm (22' 1")
Max digging depth(8ft level)	B'	6010mm (19' 9")	6550mm (21' 6")
Max vertical wall digging depth	C	5720mm (18' 9")	6120mm (20' 1")
Max digging height	D	9340mm (30' 8")	9470mm (31' 1")
Max dumping height	E	6520mm (21' 5")	6670mm (21' 11")
Min swing radius	F	3740mm (12' 3")	3640mm (11' 11")
Bucket digging force	SAE	133 kN	133 kN
		13600 kgf	13600 kgf
		29980 lbf	29980 lbf
	ISO	152 kN	152 kN
		15500 kgf	15500 kgf
		34170 lbf	34170 lbf
Arm digging force	SAE	113 kN	97 kN
		11500 kgf	9900 kgf
		25350 lbf	21830 lbf
	ISO	118 kN	101 kN
		12000 kgf	10300 kgf
		26460 lbf	22710 lbf

* : Standard

4. WEIGHT

1) R210-7V

Item	R210-7V	
	kg	lb
Upperstructure assembly	8950	19730
Main frame weld assembly	1720	3790
Engine assembly	430	950
Main pump assembly	120	265
Main control valve assembly	200	440
Swing motor assembly	190	420
Hydraulic oil tank assembly	240	530
Fuel tank assembly	195	430
Counterweight	4000	8820
Cab assembly	310	680
Lower chassis assembly	8700	19180
Track frame weld assembly	2720	6000
Swing bearing	260	570
Travel motor assembly	305	670
Turning joint	55	120
Track recoil spring	140	310
Idler	170	370
Carrier roller	20	45
Track roller	50	110
Track-chain assembly(500mm standard triple grouser shoe)	1190	2620
Front attachment assembly(5.68m boom, 2.4m arm, 0.92m³ SAE heaped bucket)	4025	8870
5.68m boom assembly	1530	3370
2.4m arm assembly	670	1480
0.92m³ SAE heaped bucket	765	1690
Boom cylinder assembly	180	400
Arm cylinder assembly	290	640
Bucket cylinder assembly	175	390
Bucket control link assembly	170	370

5. LIFTING CAPACITIES

1) ROBEX 210-7V

(1) 5.68m(18' 8") boom, 2.92m(9' 7") arm equipped with 0.92m³(SAE heaped) bucket, 500mm (20") triple grouser shoe and 4000kg counterweight.

-  : Rating over-front
-  : Rating over-side or 360 degree

Load point height		Load radius										At max. reach		
		1.5m(5ft)		3.0m(10ft)		4.5m(15ft)		6.0m(20ft)		7.5m(25ft)		Capacity		Reach
														m(ft)
7.5m (25ft)	kg lb											*3120 *6880	3000 6610	7.72 (25.3)
6.0m (20ft)	kg lb											*3210 *7080	2330 5140	8.69 (28.5)
4.5m (15ft)	kg lb							*3770 *8310	*3770 *8310	*3590 *7910	2960 6530	3340 7360	1990 4390	9.27 (30.4)
3.0m (10ft)	kg lb			*9160 *20190	*9160 *20190	*5760 *12700	*5760 *12700	*4530 *9990	4140 9130	*3950 *8710	2830 6240	3140 6920	1810 3990	9.55 (31.3)
1.5m (5ft)	kg lb			*8660 *19090	*8660 *19090	*7430 *16380	5940 13100	*5380 *11860	3840 8470	*4390 *9680	2670 5890	3080 6790	1760 3880	9.54 (31.3)
Ground Line	kg lb			*9310 *20530	*9310 *20530	*8550 *18850	5550 12240	*6060 *13360	3610 7960	4410 9720	2550 5620	3200 7050	1820 4010	9.26 (30.4)
-1.5m (-5ft)	kg lb	*8550 *18850	*8550 *18850	*12160 *26810	10530 23210	*8950 *19730	5400 11900	6150 13560	3490 7690	4340 9570	2480 5470	3550 7830	2040 4500	8.67 (28.4)
-3.0m (-10ft)	kg lb	*11700 *25790	*11700 *25790	*13020 *28700	10680 23550	*8680 *19140	5410 11930	6140 13540	3490 7690			*4230 *9330	2530 5580	7.69 (25.2)
-4.5m (-15ft)	kg lb			*11040 *24340	11010 24270	*7560 *16670	5580 12300					*4140 *9130	3830 8440	6.09 (20.0)







- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. *indicates load limited by hydraulic capacity.

(2) 5.68m(18' 8") boom, 2.40m(7' 10") arm equipped with 0.92m³(SAE heaped) bucket, 500mm (20") triple grouser shoe and 4000kg counterweight.

Load point height		Load radius										At max. reach		
		1.5m(5ft)		3.0m(10ft)		4.5m(15ft)		6.0m(20ft)		7.5m(25ft)		Capacity		Reach
														m(ft)
7.5m (25ft)	kg lb											*3450 *7610	3390 7470	7.15 (23.5)
6.0m (20ft)	kg lb							*3750 *8270	*3750 *8270			*3520 *7760	2560 5640	8.20 (26.9)
4.5m (15ft)	kg lb							*4190 *9240	*4190 *9240	*3940 *8690	2890 6370	*3630 *8000	2160 4760	8.82 (28.9)
3.0m (10ft)	kg lb					*6420 *14150	6370 14040	*4920 *10850	4060 8950	*4240 *9350	2780 6130	3380 7450	1970 4340	9.11 (29.9)
1.5m (5ft)	kg lb					*7960 *17550	5800 12790	*5690 *12540	3790 8360	4520 9960	2650 5840	3330 7340	1920 4230	9.10 (29.9)
Ground Line	kg lb			*8300 *18300	*8300 *18300	*8820 *19440	5500 12130	6260 13800	3590 7910	4410 9720	2550 5620	3480 7670	2010 4430	8.81 (28.9)
-1.5m (-5ft)	kg lb	*9220 *20330	*9220 *20330	*12750 *28110	10650 23480	*8970 *19780	5420 11950	6170 13600	3510 7740			3930 8660	2280 5030	8.18 (26.8)
-3.0m (-10ft)	kg lb	*13340 *29410	*13340 *29410	*12280 *27070	10860 23940	*8430 *18580	5500 12130	*6110 *13470	3550 7830			*4360 *9610	2930 6460	7.12 (23.4)
-4.5m (-15ft)	kg lb			*9840 *21690	*9840 *21690	*6850 *15100	5740 12650							

6. BUCKET SELECTION GUIDE

1) GENERAL BUCKET

					
0.51m³ SAE heaped bucket	0.80m³ SAE heaped bucket	※0.92m³ SAE heaped bucket	1.05m³ SAE heaped bucket	1.20m³ SAE heaped bucket	1.34m³ SAE heaped bucket

Capacity		Width		Weight	Recommendation			
					5.68m (18' 8") boom			
					2.0m arm (6' 7")	2.4m arm (7' 10")	2.92m arm (9' 7")	3.90m arm (12' 10")
SAE heaped	CECE heaped	Without side cutter	With side cutter					
0.51m³ (0.67yd³)	0.45m³ (0.59yd³)	700mm (27.6")	820mm (32.3")	570kg (1260lb)				
0.80m³ (1.05yd³)	0.70m³ (0.92yd³)	1000mm (39.4")	1120mm (44.1")	700kg (1540lb)				
※ 0.92m³ (1.20yd³)	0.80m³ (1.05yd³)	1150mm (45.3")	1270mm (50.0")	770kg (1700lb)				
1.05m³ (1.37yd³)	0.90m³ (1.18yd³)	1250mm (49.2")	1370mm (53.9")	810kg (1790lb)				
1.20m³ (1.57yd³)	1.00m³ (1.31yd³)	1400mm (55.1")	1520mm (59.8")	850kg (1870lb)				
1.34m³ (1.75yd³)	1.15m³ (1.50yd³)	1550mm (61.0")	1670mm (65.7")	920kg (2030lb)				

※ : Standard bucket



Applicable for materials with density of 2000kgf/m³ (3370lbf/yd³) or less






Applicable for materials with density of 1600kgf/m³ (2700lbf/yd³) or less



Applicable for materials with density of 1100kgf/m³ (1850lbf/yd³) or less

2) HEAVY DUTY, ROCK-HEAVY DUTY AND SLOPE FINISHING BUCKET

		
◆0.74, 0.90, 1.05m³ SAE heaped bucket	⊙0.87, 1.20m³ SAE heaped bucket	■0.75m³ SAE heaped bucket

Capacity		Width		Weight	Recommendation			
					5.68m (18' 8") boom			
SAE heaped	CECE heaped	Without side cutter	With side cutter		2.0m arm (6' 7")	2.4m arm (7' 10")	2.92m arm (9' 7")	3.90m arm (12' 10")
◆0.74m³ (0.97yd³)	0.65m³ (0.85yd³)	985mm (38.8")	-	770kg (1700lb)				
◆0.90m³ (1.18yd³)	0.80m³ (1.05yd³)	1070mm (42.0")	-	810kg (1790lb)				
◆1.05m³ (1.37yd³)	0.92m³ (1.20yd³)	1290mm (50.8")	-	890kg (1960lb)				
⊙0.87m³ (1.14yd³)	0.75m³ (0.98yd³)	1140mm (44.9")	-	900kg (1980lb)				
⊙1.20m³ (1.57yd³)	1.00m³ (1.31yd³)	1410mm (55.5")	-	1030kg (2270lb)				
■0.75m³ (0.98yd³)	0.65m³ (0.85yd³)	1790mm (70.5")	-	880kg (1940lb)				

◆ : Heavy duty bucket ⊙: Rock-Heavy duty bucket ■ : Slope finishing bucket

 Applicable for materials with density of 2000kgf/m³ (3370lbf/yd³) or less

 Applicable for materials with density of 1600kgf/m³ (2700lbf/yd³) or less


 Applicable for materials with density of 1100kgf/m³ (1850lbf/yd³) or less

7. UNDERCARRIAGE

1) TRACKS

X-leg type center frame is integrally welded with reinforced box-section track frames. The design includes dry tracks, lubricated rollers, idlers, sprockets, hydraulic track adjusters with shock absorbing springs and assembled track-type tractor shoes with triple grousers.

2) TYPES OF SHOES

Model	Shapes		Triple grouser
			
R210-7V	Shoe width	mm(in)	500(20)
	Operating weight	kg(lb)	21000(46300)
	Ground pressure	kgf/cm²(psi)	0.56(7.97)
	Overall width	mm(ft-in)	2700(8' 10")

3) NUMBER OF ROLLERS AND SHOES ON EACH SIDE

Item	Quantity
Carrier rollers	2EA
Track rollers	7EA
Track shoes	46EA

4) SELECTION OF TRACK SHOE

Suitable track shoes should be selected according to operating conditions.

Method of selecting shoes

Confirm the category from the list of applications in **table 2**, then use **table 1** to select the shoe.

※ **Table 1**

Track shoe	Specification	Category
500mm triple grouser	Standard	A

※ **Table 2**

Category	Applications	Precautions
A	Rocky ground, river beds, normal soil	Travel at low speed on rough ground with large obstacles such as boulders or fallen trees

8. SPECIFICATIONS FOR MAJOR COMPONENTS

1) ENGINE

Item	Specification
Model	Kirloskar 6R1080T
Type	6 cylinder, 4-cycle turbocharged diesel engine
Cooling method	Water cooling
Number of cylinders and arrangement	6 cylinders, in-line
Firing order	1-5-3-6-2-4
Combustion chamber type	Direct injection type
Cylinder bore × stroke	105 × 125mm(4.1" × 4.92")
Piston displacement	6495cc(416cu in)
Compression ratio	17.6 : 1
Rated gross horse power (ISO 3046)	150Hp @ 1900rpm(112kW @ 1900rpm)
Maximum torque	585N · m @ 1500rpm(431lbf · ft)
Engine oil quantity(1 st FILL)	15 l (4.0U.S. gal)
Dry weight	700kg(1543lb)
High idling speed	2400 ± 50rpm
Low idling speed	1000 ± 100rpm
Rated fuel consumption	158g/Hp · hr @ 1300rpm
Starting motor	24V-4.5kW
Alternator	24V, 55A
Battery	2 × 12V × 100Ah

2) MAIN PUMP

Item	Specification
Type	Variable displacement tandem axis piston pumps
Capacity	2 × 113cc/rev
Maximum pressure	330kgf/cm ² (4694psi)
Rated oil flow	2 × 210 l /min (55.5U.S. gpm/ 46.2U.K. gpm)

3) GEAR PUMP

Item	Specification
Type	Fixed displacement gear pump single stage
Capacity	10cc/rev
Maximum pressure	35kgf/cm ² (500psi)
Rated oil flow	19.5 l /min(5.2U.S. gpm/4.2U.K. gpm)

4) MAIN CONTROL VALVE

Item	Specification
Type	9 spools mono-block
Operating method	Hydraulic pilot system
Main relief valve pressure	330kgf/cm ² (4695psi)
Overload relief valve pressure	390kgf/cm ² (5550psi)

5) SWING MOTOR

Item	Specification
Type	Two fixed displacement axial piston motor
Capacity	151cc/rev
Relief pressure	240kgf/cm ² (3414psi)
Braking system	Automatic, spring applied hydraulic released
Braking torque	59kgf · m(427lbf · ft)
Brake release pressure	33~50kgf/cm ² (470~711psi)
Reduction gear type	2 - stage planetary
Swing speed	11.0rpm

6) TRAVEL MOTOR

Item	Specification
Type	Variable displacement axial piston motor
Relief pressure	330kgf/cm ² (4695psi)
Reduction gear type	2-stage planetary
Braking system	Automatic, spring applied hydraulic released
Brake release pressure	11kgf/cm ² (156psi)
Braking torque	49.3kgf · m(357lbf · ft)

7) REMOTE CONTROL VALVE

Item		Specification
Type		Pressure reducing type
Operating pressure	Minimum	6.5kgf/cm ² (92psi)
	Maximum	26kgf/cm ² (370psi)
Single operation stroke	Lever	61mm(2.4in)
	Pedal	123mm(4.84in)

8) CYLINDER

Item		Specification
Boom cylinder	Bore dia × Rod dia × Stroke	∅ 120 × ∅ 85 × 1290mm
	Cushion	Extend only
Arm cylinder	Bore dia × Rod dia × Stroke	∅ 140 × ∅ 100 × 1510mm
	Cushion	Extend and retract
Bucket cylinder	Bore dia × Rod dia × Stroke	∅ 125 × ∅ 85 × 1055mm
	Cushion	Extend only

※ **Discoloration of cylinder rod can occur when the friction reduction additive of lubrication oil spreads on the rod surface.**

※ **Discoloration does not cause any harmful effect on the cylinder performance.**

9) SHOE

Item		Width	Ground pressure	Link quantity	Overall width
R210-7V	Standard	500mm(20")	0.56kgf/cm ² (7.97psi)	46	2700mm(8' 10")

10) BUCKET

Item		Capacity		Tooth quantity	Width	
		SAE heaped	CECE heaped		Without side cutter	With side cutter
R210-7V	STD	0.92m ³ (1.20yd ³)	0.80m ³ (1.05yd ³)	5	1150mm(45.3")	1270mm(50.0")
	OPT	0.51m ³ (0.67yd ³)	0.45m ³ (0.59yd ³)	3	700mm(27.6")	820mm(32.3")
		0.80m ³ (1.05yd ³)	0.70m ³ (0.92yd ³)	5	1000mm(39.4")	1120mm(44.1")
		1.05m ³ (1.37yd ³)	0.90m ³ (7.18yd ³)	5	1250mm(49.2")	1370mm(53.9")
		1.20m ³ (1.57yd ³)	1.00m ³ (1.31yd ³)	6	1400mm(55.1")	1520mm(59.8")
		1.34m ³ (1.75yd ³)	1.15m ³ (1.50yd ³)	6	1550mm(61.0")	1670mm(65.7")
		◆0.74m ³ (0.97yd ³)	0.65m ³ (0.85yd ³)	5	985mm(38.8")	-
		◆0.90m ³ (1.18yd ³)	0.80m ³ (1.05yd ³)	5	1070mm(42.0")	-
		◆1.05m ³ (1.37yd ³)	0.92m ³ (1.20yd ³)	5	1290mm(50.8")	-
		◎0.87m ³ (1.14yd ³)	0.75m ³ (0.98yd ³)	5	1140mm(44.9")	-
		◎1.20m ³ (1.57yd ³)	1.00m ³ (1.31yd ³)	5	1410mm(55.5")	-
		■0.75m ³ (0.98yd ³)	0.65m ³ (0.85yd ³)	-	1790mm(70.5")	-

◆ : Heavy duty bucket

◎ : Rock-Heavy duty bucket

■ : Slope finishing bucket

9. RECOMMENDED OILS

Use only oils listed below or equivalent.

Do not mix different brand oil.

Service point	Kind of fluid	Capacity ℓ (U.S. gal)	Ambient temperature °C (°F)						
			-20 (-4)	-10 (14)	0 (32)	10 (50)	20 (68)	30 (86)	40 (104)
Engine oil pan	Engine oil	15.0(4.0)				SAE 30			
			SAE 10W						
			SAE 10W-30						
			SAE 15W-40						
Swing drive	Gear oil	5.0(1.3)		SAE 85W-140					
Final drive		5.8 × 2 (1.5 × 2)							
Hydraulic tank	Hydraulic oil	Tank; 180(48)	ISO VG 32						
		System; 290(77)	ISO VG 46						
			ISO VG 68						
Fuel tank	Diesel fuel	340(90)	ASTM D975 NO.1						
			ASTM D975 NO.2						
Fitting (Grease nipple)	Grease	As required	NLGI NO.1						
			NLGI NO.2						
Radiator (Reservoir tank)	Mixture of antifreeze and water 50 : 50	35(9.2)		Ethylene glycol base permanent type					

SAE : Society of Automotive Engineers

API : American Petroleum Institute

ISO : International Organization for Standardization

NLGI : National Lubricating Grease Institute

ASTM : American Society of Testing and Material