


SPECIFICATIONS

1. MAJOR COMPONENT

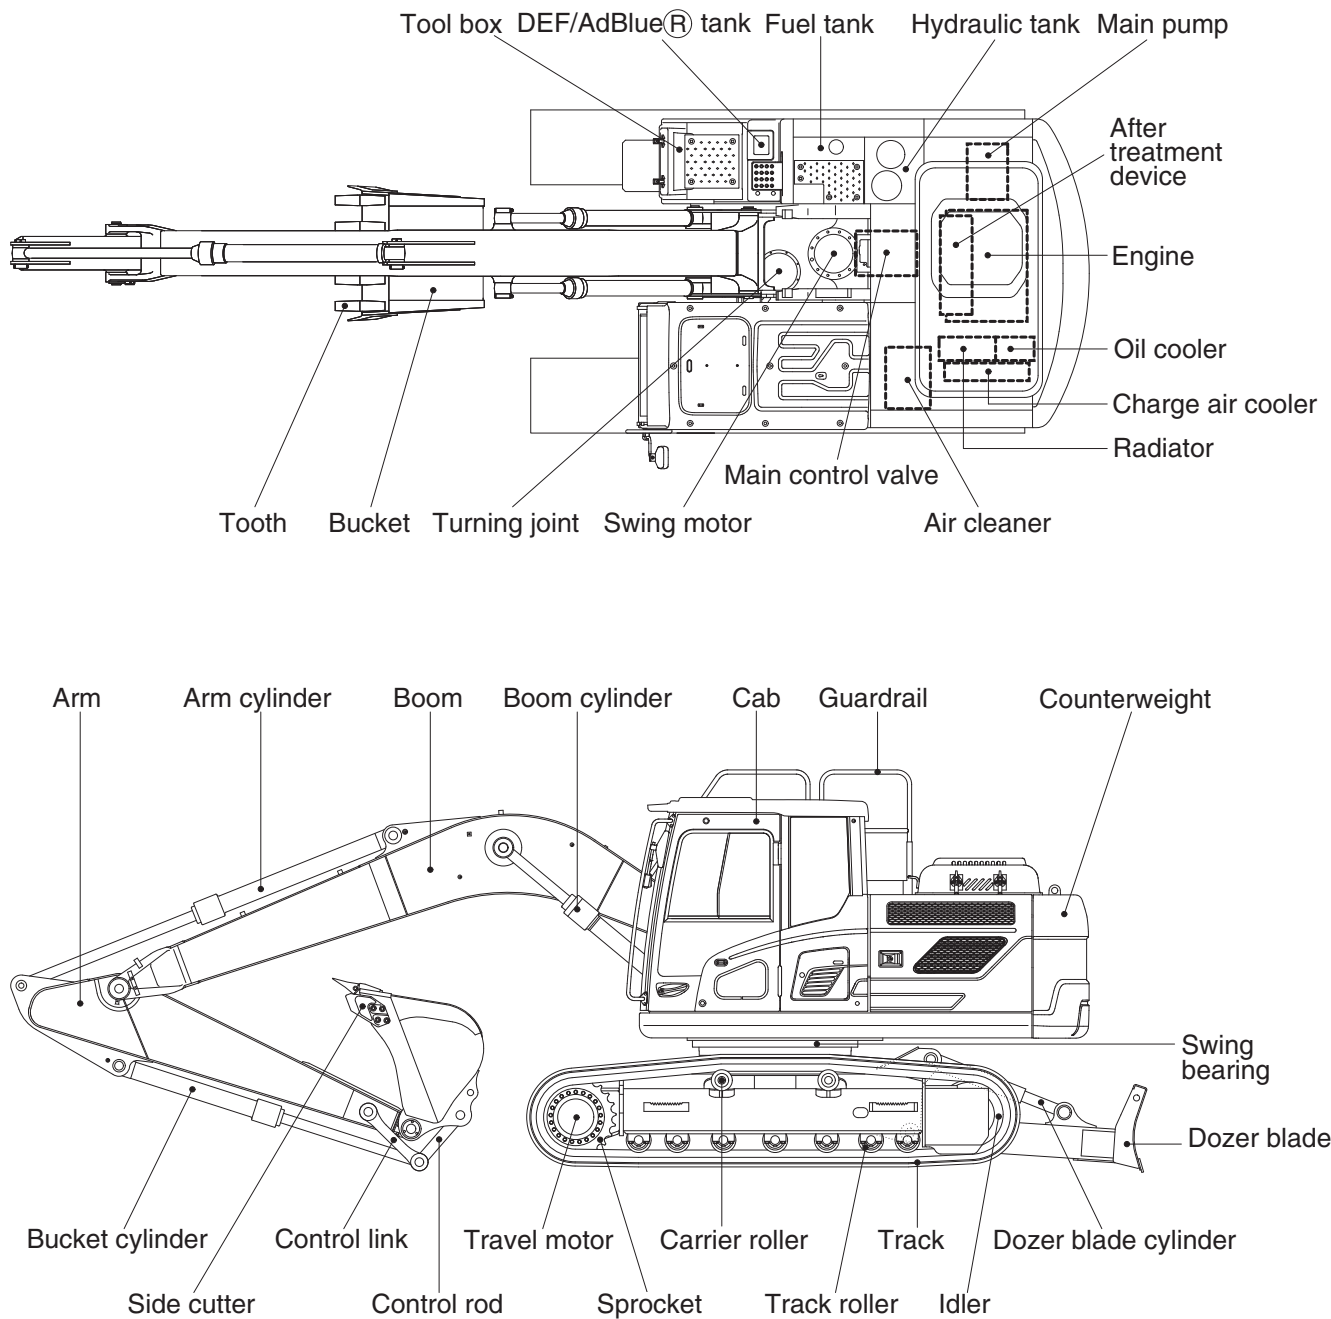


180F2SP01

2. SPECIFICATIONS

1) HX180 L

· 5.1 m (16' 9") BOOM and 2.6 m (8' 6") ARM

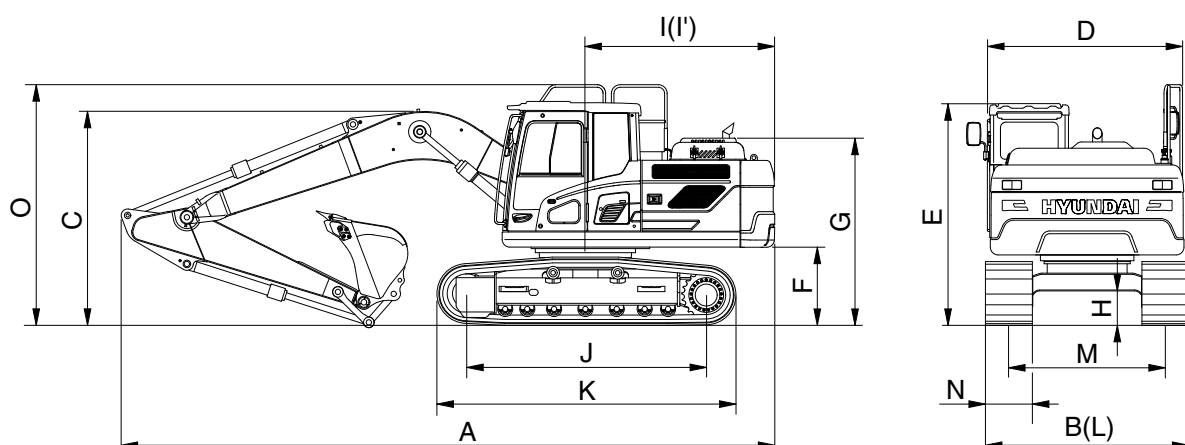


180F2SP02

Description		Unit	Specification
Operating weight		kg (lb)	18800 (41450)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.76 (0.99)
Overall length	A	mm (ft-in)	8650 (28' 5")
Overall width, with 600 mm shoe	B		2850 (9' 4")
Overall height of boom	C		2990 (9' 10")
Superstructure width	D		2475 (8' 1")
Overall height of cab	E		2980 (9' 9")
Ground clearance of counterweight	F		1055 (3' 6")
Engine cover height	G		2525 (8' 3")
Minimum ground clearance	H		460 (1' 6")
Rear-end distance	I		2480 (8' 2")
Rear-end swing radius	I'		2480 (8' 2")
Distance between tumblers	J		3360 (11' 0")
Undercarriage length	K		4116 (13' 6")
Undercarriage width	L		2850 (9' 4")
Track gauge	M		2250 (7' 5")
Track shoe width, standard	N		600 (24")
Overall height of guardrail	O		3235 (10' 7")
Travel speed (low/high)		km/hr (mph)	3.2/5.3 (2.0/3.3)
Swing speed		rpm	10.3
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.43 (6.11)
Max traction force		kgf (lbf)	17000 (37500)

2) HX180 L

· 5.1 m (16' 9") HYDRAULIC ADJUSTABLE BOOM AND 2.6 m (8' 6") ARM

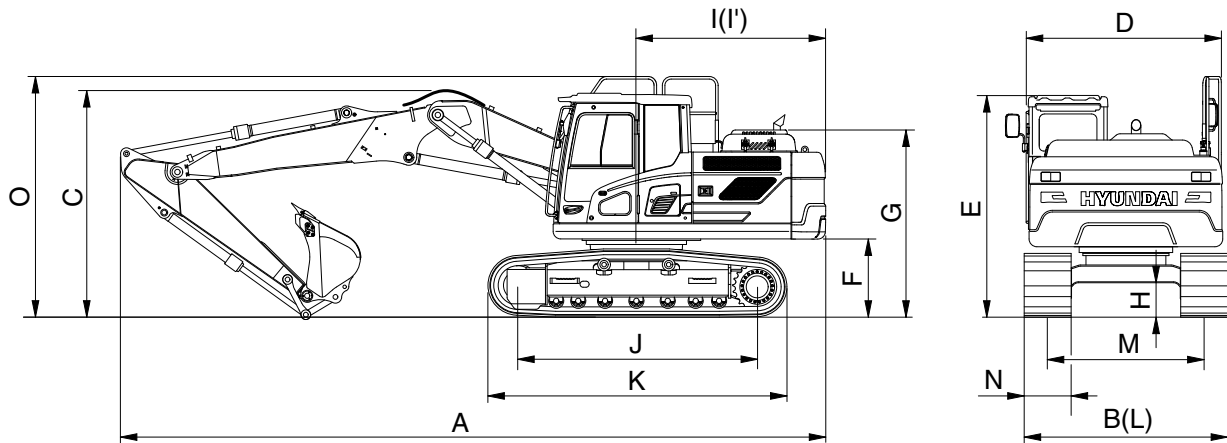


180F2SP03

Description		Unit	Specification
Operating weight		kg (lb)	19700 (43430)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.76 (0.99)
Overall length	A	mm (ft-in)	8610 (28' 3")
Overall width, with 600 mm shoe	B		2850 (9' 4")
Overall height of boom	C		3060 (10' 0")
Superstructure width	D		2475 (8' 1")
Overall height of cab	E		2980 (9' 9")
Ground clearance of counterweight	F		1055 (3' 6")
Engine cover height	G		2525 (8' 3")
Minimum ground clearance	H		460 (1' 6")
Rear-end distance	I		2480 (8' 2")
Rear-end swing radius	I'		2480 (8' 2")
Distance between tumblers	J		3360 (11' 0")
Undercarriage length	K		4116 (13' 6")
Undercarriage width	L		2850 (9' 4")
Track gauge	M		2250 (7' 5")
Track shoe width, standard	N		600 (24")
Overall height of guardrail	O		3235 (10' 7")
Travel speed (low/high)		km/hr (mph)	3.2/5.3 (2.0/3.3)
Swing speed		rpm	10.3
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.45 (6.40)
Max traction force		kgf (lbf)	17000 (37500)

3) HX180 L

· 5.1 m (16' 9") BOOM and 2.6 m (8' 6") ARM WITH DOZER

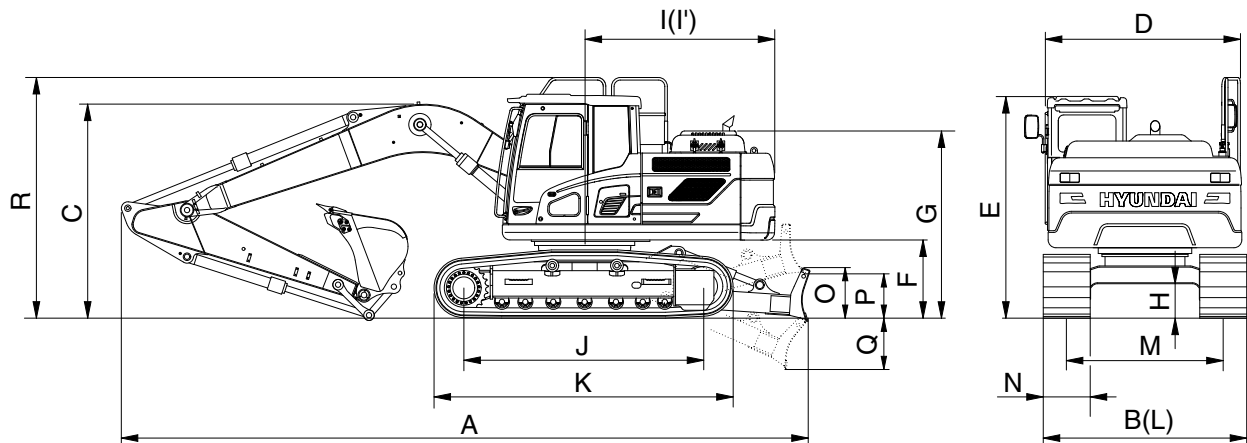


180F2SP04A

Description		Unit	Specification
Operating weight		kg (lb)	19700 (43430)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.76 (0.99)
Overall length	A	mm (ft-in)	9100 (29' 10")
Overall width, with 600 mm shoe	B		2850 (9' 5")
Overall height of boom	C		2990 (9' 10")
Superstructure width	D		2475 (8' 1")
Overall height of cab	E		2980 (9' 9")
Ground clearance of counterweight	F		1055 (3' 6")
Engine cover height	G		2525 (8' 3")
Minimum ground clearance	H		460 (1' 6")
Rear-end distance	I		2480 (8' 2")
Rear-end swing radius	I'		2480 (8' 2")
Distance between tumblers	J		3360 (11' 0")
Undercarriage length	K		4116 (13' 6")
Undercarriage width	L		2850 (9' 5")
Track gauge	M		2250 (7' 5")
Track shoe width, standard	N		600 (24")
Height of blade	O		640 (2' 1")
Ground clearance of blade up	P		615 (2' 0")
Depth of blade down	Q		675 (2' 3")
Overall height of guardrail	R		3235 (10' 7")
Travel speed (low/high)		km/hr (mph)	3.2/5.3 (2.0/3.3)
Swing speed		rpm	10.3
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.45 (6.40)
Max traction force		kgf (lbf)	17000 (37500)

4) HX180 NL

· 5.1 m (16' 9") BOOM and 2.6 m (8' 6") ARM

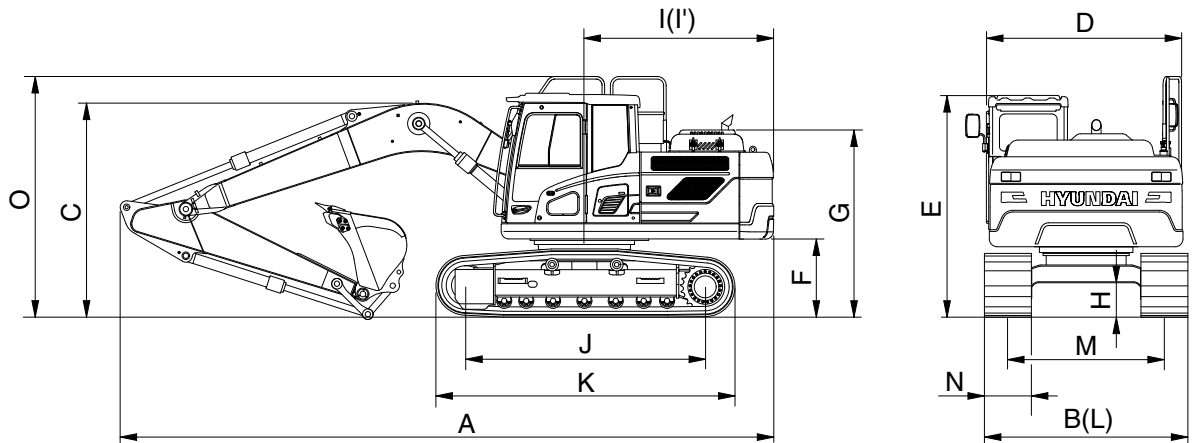


180F2SP02

Description		Unit	Specification
Operating weight		kg (lb)	18700 (41230)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.76 (0.99)
Overall length	A	mm (ft-in)	8650 (28' 5")
Overall width, with 600 mm shoe	B		2600 (8' 6")
Overall height of boom	C		2990 (9' 10")
Superstructure width	D		2475 (8' 1")
Overall height of cab	E		2980 (9' 9")
Ground clearance of counterweight	F		1055 (3' 6")
Engine cover height	G		2525 (8' 3")
Minimum ground clearance	H		460 (1' 6")
Rear-end distance	I		2480 (8' 2")
Rear-end swing radius	I'		2480 (8' 2")
Distance between tumblers	J		3360 (11' 0")
Undercarriage length	K		4116 (13' 6")
Undercarriage width	L		2850 (9' 5")
Track gauge	M		2000 (6' 7")
Track shoe width, standard	N		600 (24")
Overall height of guardrail	O		3235 (10' 7")
Travel speed (low/high)		km/hr (mph)	3.2/5.3 (2.0/3.3)
Swing speed		rpm	10.3
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.43 (6.11)
Max traction force		kgf (lbf)	17000 (37500)

3. WORKING RANGE

1) 5.1 m (16' 9") MONO BOOM

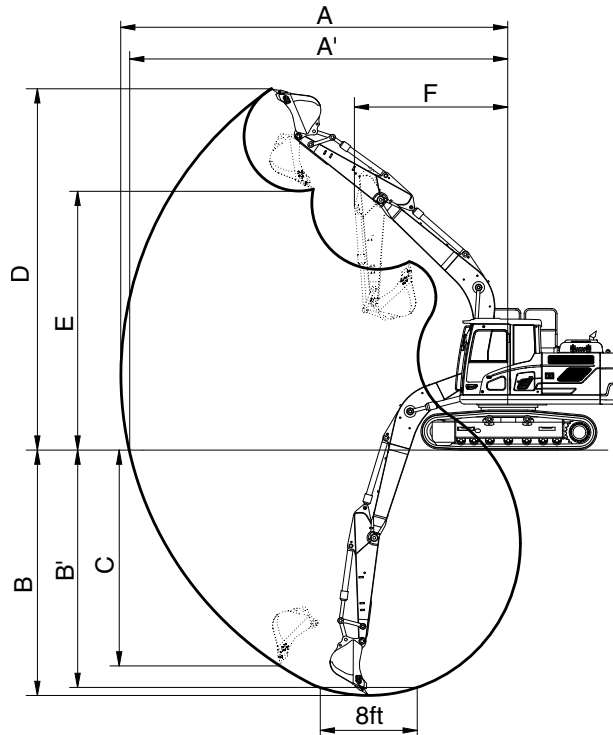


180F2SP06

Description		2.2 m (7' 3") Arm	2.6 m (8' 6") Arm	3.1 m (10' 2") Arm
Max digging reach	A	8690 mm (28' 6")	9020 mm (29' 7")	9450 mm (31' 0")
Max digging reach on ground	A'	8530 mm (27' 12")	8860 mm (29' 1")	9300 mm (30' 6")
Max digging depth	B	5660 mm (18' 7")	6060 mm (19' 11")	6560 mm (21' 6")
Max digging depth (8ft level)	B'	5430 mm (17' 10")	5850 mm (19' 2")	6370 mm (20' 11")
Max vertical wall digging depth	C	5120 mm (16' 10")	5380 mm (17' 8")	5710 mm (18' 9")
Max digging height	D	8750 mm (28' 8")	8840 mm (29' 0")	8980 mm (29' 6")
Max dumping height	E	6110 mm (20' 1")	6220 mm (20' 5")	6390 mm (21' 0")
Min swing radius	F	3180 mm (10' 5")	3170 mm (10' 5")	3170 mm (10' 5")
Bucket digging force	SAE	107.9 [117.2] kN	107.9 [117.2] kN	107.9 [117.2] kN
		11000 [11940] kgf	11000 [11940] kgf	11000 [11940] kgf
		24250 [26330] lbf	24250 [23660] lbf	24250 [26330] lbf
	ISO	123.6 [134.2] kN	123.6 [134.2] kN	123.6 [134.2] kN
		12600 [13680] kgf	12600 [13680] kgf	12600 [13680] kgf
		27780 [30160] lbf	27780 [30160] lbf	27780 [30160] lbf
Arm crowd force	SAE	87.2 [94.7] kN	77.3 [83.9] kN	69.0 [74.9] kN
		8890 [9650] kgf	7880 [8560] kgf	7030 [7630] kgf
		19600 [21280] lbf	17370 [18860] lbf	15500 [16830] lbf
	ISO	91.0 [98.8] kN	80.3 [87.2] kN	71.4 [77.5] kN
		9280 [10080] kgf	8190 [8890] kgf	7280 [7900] kgf
		20460 [22210] lbf	18060 [19600] lbf	16050 [17430] lbf

[] : Power boost

2) 5.1 m (16' 9") HYDRAULIC ADJUSTABLE BOOM

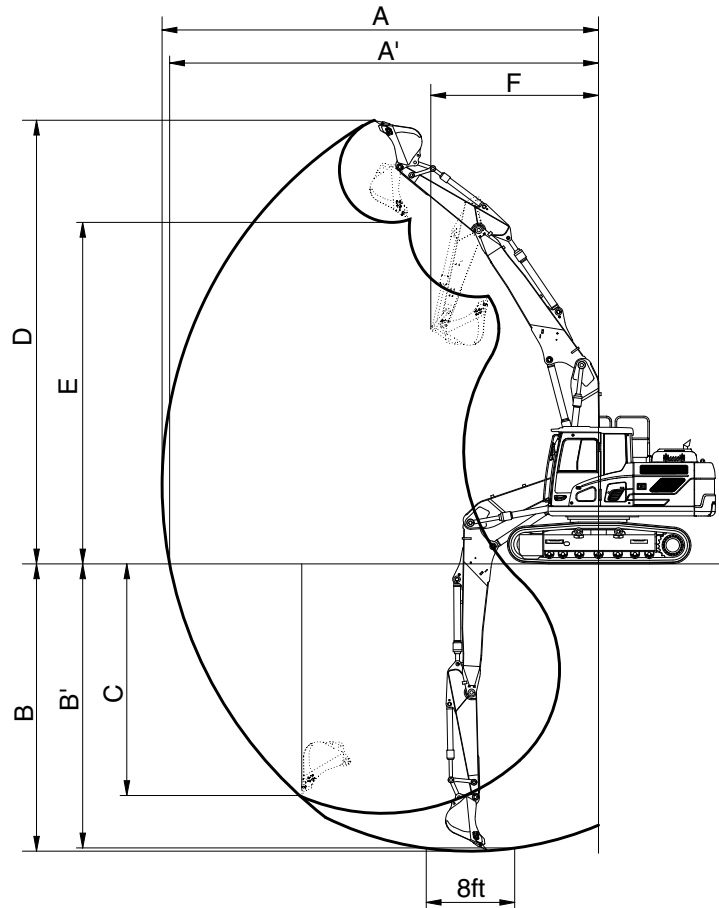

180F2SP08

Description		2.2 m (7' 3") Arm	2.6 m (8' 6") Arm
Max digging reach	A	8760 mm (28' 9")	9110 mm (29' 11")
Max digging reach on ground	A'	8590 mm (28' 2")	8950 mm (29' 4")
Max digging depth	B	5430 mm (17' 10")	5830 mm (19' 2")
Max digging depth (8ft level)	B'	5330 mm (17' 6")	5730 mm (18' 10")
Max vertical wall digging depth	C	4630 mm (15' 2")	4980 mm (16' 4")
Max digging height	D	9420 mm (30' 11")	9610 mm (31' 6")
Max dumping height	E	6710 mm (22' 0")	6910 mm (22' 8")
Min swing radius	F	3100 mm (10' 2")	2970 mm (9' 9")
Bucket digging force	SAE	107.9 [117.2] kN	107.9 [117.2] kN
		11000 [11940] kgf	11000 [11940] kgf
		24250 [26330] lbf	24250 [26330] lbf
	ISO	123.6 [134.2] kN	123.6 [134.2] kN
		12600 [13680] kgf	12600 [13680] kgf
		27780 [30160] lbf	27780 [30160] lbf
Arm crowd force	SAE	87.2 [94.7] kN	77.3 [83.9] kN
		8890 [9650] kgf	7880 [8560] kgf
		19600 [21280] lbf	17370 [18860] lbf
	ISO	91.0 [98.8] kN	80.3 [87.2] kN
		9280 [10080] kgf	8190 [8890] kgf
		20460 [22210] lbf	18060 [19600] lbf

[] : Power boost

4. WEIGHT

Item	HX180 L		HX180 L (with dozer)		HX180 NL	
	kg	lb	kg	lb	kg	lb
Upper structure assembly						
· Main frame weld assembly	1440	3170	←		←	
· Engine assembly	589	1300	←		←	
· Fan clutch assembly	45	100	←		←	
· Main pump assembly	89	200	←		←	
· Main control valve assembly	140	310	←		←	
· Swing motor assembly	250	550	←		←	
· Hydraulic oil tank assembly	150	330	←		←	
· Fuel tank assembly	130	290	←		←	
· Counterweight	2900	6390	←		←	
· Cab assembly	500	1100	←		←	
Lower chassis assembly						
· Track frame weld assembly	2130	4700	2370	5230	1980	4370
· Swing bearing	260	570	←		←	
· Travel motor assembly	300	660	←		←	
· Turning joint	60	130	←		←	
· Track recoil spring	132	290	←		←	
· Idler	151	330	←		←	
· Sprocket	54.4	120	←		←	
· Carrier roller	20	45	←		←	
· Track roller	40	90	←		←	
· Track-chain assembly (600 mm standard triple grouser shoe)	1230	2710	←		←	
Front attachment assembly						
· 5.1 m boom assembly	1060	2340	←		←	
· 2.6 m arm assembly	540	1190	←		←	
· 0.76 m³ SAE heaped bucket	620	1370	←		←	
· Boom cylinder assembly	155	340	←		←	
· Arm cylinder assembly	180	400	←		←	
· Bucket cylinder assembly	125	260	←		←	
· Bucket control link assembly	120	265	←		←	
· Dozer blade assembly	-	-	715	1575	-	-
· Dozer blade cylinder assembly	-	-	66	146	-	-

※ This information is different with operating and transportation weight because it is not including harness, pipe, oil, fuel so on.


※ Refer to Transportation for actual weight information and Specifications for operating weight.

5. LIFTING CAPACITIES

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX180 L	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		5100	2600	2900	600	-	-	-	-	-

·  : Rating over-front

·  : Rating over-side or 360 degree



Lift-point height (A)		Lift-point radius (B)										At max. reach		
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
														m (ft)
7.5 m (24.6 ft)	kg											*3400	*3400	4.85
	lb											*7500	*7500	(15.9)
6.0 m (19.7 ft)	kg							*3830	*3830			*2960	*2960	6.27
	lb							*8440	*8440			*6530	*6530	(20.6)
4.5 m (14.8 ft)	kg					*4890	*4890	*4450	4170			*2840	*2840	7.10
	lb					*10780	*10780	*9810	9190			*6260	*6260	(23.3)
3.0 m (9.8 ft)	kg			*9410	*9410	*6140	*6140	*4960	4030	*3100	2870	*2870	*2850	7.54
	lb			*20750	*20750	*13540	*13540	*10930	8880	*6830	6330	*6330	*6280	(24.7)
1.5 m (4.9 ft)	kg					*7420	5830	*5550	3880	*4030	2820	*3050	2730	7.66
	lb					*16360	12850	*12240	8550	*8880	6220	*6720	6020	(25.1)
0.0 m (0.0 ft)	kg			*5280	*5280	*8120	5610	5790	3760			*3420	2790	7.47
	lb			*11640	*11640	*17900	12370	12760	8290			*7540	6150	(24.5)
-1.5 m (-4.9 ft)	kg	*5070	*5070	*9170	*9170	*8060	5550	5740	3720			*4130	3060	6.95
	lb	*11180	*11180	*20220	*20220	*17770	12240	12650	8200			*9110	6750	(22.8)
-3.0 m (-9.8 ft)	kg	*9350	*9350	*10230	*10230	*7160	5600	*4940	3780			*4920	3770	6.01
	lb	*20610	*20610	*22550	*22550	*15790	12350	*10890	8330			*10850	8310	(19.7)
-4.5 m (-14.8 ft)	kg			*6920	*6920							*4590	*4590	4.39
	lb			*15260	*15260							*10120	*10120	(14.4)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.

Lifting capacities will vary with different work tools, ground conditions and attachments.


The difference between the weight of a work tool attachment must be subtracted.

Consult your HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause possible personal injury or property damage.

Make adjustments to the rated load as necessary for non-standard configurations.

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX180 L	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		5100	2200	2900	600	-	-	-	-	-

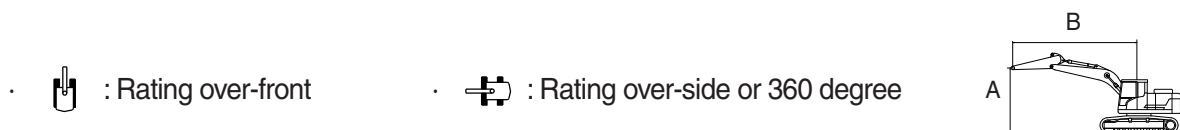


Lift-point height (A)		Lift-point radius (B)						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach
										m (ft)
7.5 m	kg							*3790	*3790	4.35
(24.6 ft)	lb							*8360	*8360	(14.3)
6.0 m	kg							*3140	*3140	5.90
(19.7 ft)	lb							*6920	*6920	(19.4)
4.5 m	kg			*5320	*5320	*4740	4120	*2940	*2940	6.77
(14.8 ft)	lb			*11730	*11730	*10450	9080	*6480	*6480	(22.2)
3.0 m	kg			*6530	6080	*5190	3990	*2930	*2930	7.23
(9.8 ft)	lb			*14400	13400	*11440	8800	*6460	*6460	(23.7)
1.5 m	kg			*7690	5750	*5700	3850	*3070	2880	7.36
(4.9 ft)	lb			*16950	12680	*12570	8490	*6770	6350	(24.1)
0.0 m	kg	*3900	*3900	*8180	5580	5770	3750	*3410	2960	7.16
(0.0 ft)	lb	*8600	*8600	*18030	12300	12720	8270	*7520	6530	(23.5)
-1.5 m	kg	*9210	*9210	*7910	5550	5750	3730	*4080	3290	6.62
(-4.9 ft)	lb	*20300	*20300	*17440	12240	12680	8220	*8990	7250	(21.7)
-3.0 m	kg	*9400	*9400	*6720	5640			*4890	4170	5.62
(-9.8 ft)	lb	*20720	*20720	*14820	12430			*10780	9190	(18.5)

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX180 L	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		5100	3100	2900	600	-	-	-	-	-


·  : Rating over-front

·  : Rating over-side or 360 degree



Lift-point height (A)		Lift-point radius (B)										At max. reach		
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
														m (ft)
7.5 m (24.6 ft)	kg											*2690	*2690	5.51
	lb											*5930	*5930	(18.1)
6.0 m (19.7 ft)	kg							*3680	*3680			*2410	*2410	6.79
	lb							*8110	*8110			*5310	*5310	(22.3)
4.5 m (14.8 ft)	kg							*4040	*4040	*2550	*2550	*2330	*2330	7.56
	lb							*8910	*8910	*5620	*5620	*5140	*5140	(24.8)
3.0 m (9.8 ft)	kg			*7980	*7980	*5570	*5570	*4610	4050	*3770	2880	*2370	*2370	7.97
	lb			*17590	*17590	*12280	*12280	*10160	8930	*8310	6350	*5220	*5220	(26.2)
1.5 m (4.9 ft)	kg			*6730	*6730	*6970	5870	*5270	3880	4230	2800	*2520	2500	8.09
	lb			*14840	*14840	*15370	12940	*11620	8550	9330	6170	*5560	5510	(26.5)
0.0 m (0.0 ft)	kg			*6140	*6140	*7890	5610	*5770	3740	4160	2740	*2810	2540	7.91
	lb			*13540	*13540	*17390	12370	*12720	8250	9170	6040	*6190	5600	(25.9)
-1.5 m (-4.9 ft)	kg	*4780	*4780	*8740	*8740	*8090	5500	5690	3670			*3360	2750	7.42
	lb	*10540	*10540	*19270	*19270	*17840	12130	12540	8090			*7410	6060	(24.3)
-3.0 m (-9.8 ft)	kg	*8060	*8060	*11010	10490	*7510	5510	*5400	3680			*4500	3280	6.56
	lb	*17770	*17770	*24270	23130	*16560	12150	*11900	8110			*9920	7230	(21.5)
-4.5 m (-14.8 ft)	kg			*8340	*8340	*5690	5660					*4680	*4680	5.11
	lb			*18390	*18390	*12540	12480					*10320	*10320	(16.8)

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX180 L	2-PIECE BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		5100	2200	3250	600	-	-	-	-	-

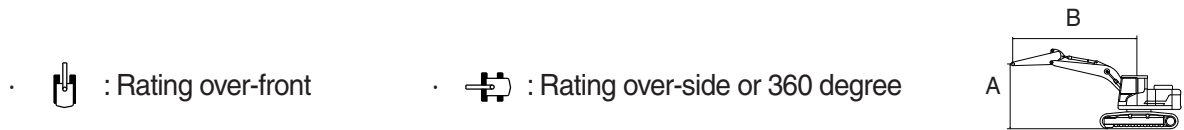


Lift-point height (A)		Lift-point radius (B)						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach
										m (ft)
7.5 m (24.6 ft)	kg lb							*4040 *8910	*4040 *8910	4.46 (14.6)
6.0 m (19.7 ft)	kg lb			*4490 *9900	*4490 *9900			*3260 *7190	*3260 *7190	5.98 (19.6)
4.5 m (14.8 ft)	kg lb			*5090 *11220	*5090 *11220	*4540 *10010	4300 9480	*2980 *6570	*2980 *6570	6.84 (22.5)
3.0 m (9.8 ft)	kg lb			*6250 *13780	*6250 *13780	*4980 *10980	4160 9170	*2910 *6420	*2910 *6420	7.30 (23.9)
1.5 m (4.9 ft)	kg lb			*7410 *16340	5990 13210	*5500 *12130	4010 8840	*3000 *6610	2970 6550	7.42 (24.3)
0.0 m (0.0 ft)	kg lb			*7990 *17610	5810 12810	*5840 *12870	3910 8620	*3240 *7140	3050 6720	7.23 (23.7)
-1.5 m (-4.9 ft)	kg lb	*8220 *18120	*8220 *18120	*7850 *17310	5780 12740	*5730 *12630	3890 8580	*3760 *8290	3400 7500	6.69 (21.9)

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX180 L	2-PIECE BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		5100	2600	3250	600	-	-	-	-	-

·  : Rating over-front

·  : Rating over-side or 360 degree




Lift-point height (A)		Lift-point radius (B)								At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
												m (ft)
7.5 m (24.6 ft)	kg lb			*4310 *9500	*4310 *9500					*3560 *7850	*3560 *7850	5.00 (16.4)
6.0 m (19.7 ft)	kg lb					*4130 *9110	*4130 *9110			*3040 *6700	*3040 *6700	6.39 (21.0)
4.5 m (14.8 ft)	kg lb			*4680 *10320	*4680 *10320	*4250 *9370	*4250 *9370			*2860 *6310	*2860 *6310	7.20 (23.6)
3.0 m (9.8 ft)	kg lb			*5880 *12960	*5880 *12960	*4750 *10470	4210 9280	*3650 *8050	2990 6590	*2840 *6260	*2840 *6260	7.63 (25.0)
1.5 m (4.9 ft)	kg lb			*7140 *15740	6070 13380	*5340 *11770	4040 8910	4420 9740	2930 6460	*2960 *6530	2800 6170	7.75 (25.4)
0.0 m (0.0 ft)	kg lb			*7900 *17420	5840 12870	*5770 *12720	3920 8640	*3830 *8440	2890 6370	*3240 *7140	2860 6310	7.56 (24.8)
-1.5 m (-4.9 ft)	kg lb	*8270 *18230	*8270 *18230	*7960 *17550	5780 12740	*5820 *12830	3880 8550			*3790 *8360	3140 6920	7.05 (23.1)
-3.0 m (-9.8 ft)	kg lb			*7220 *15920	5850 12900							

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX180 NL	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		5100	2200	2900	600	-	-	-	-	-

·  : Rating over-front

·  : Rating over-side or 360 degree




Lift-point height (A)		Lift-point radius (B)						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach
										m (ft)
7.5 m (24.6 ft)	kg lb							*3790 *8360	*3790 *8360	4.35 (14.3)
6.0 m (19.7 ft)	kg lb							*3140 *6920	*3140 *6920	5.90 (19.4)
4.5 m (14.8 ft)	kg lb			*5320 *11730	*5320 *11730	*4740 *10450	3500 7720	*2940 *6480	2870 6330	6.77 (22.2)
3.0 m (9.8 ft)	kg lb			*6530 *14400	5120 11290	*5190 *11440	3380 7450	*2930 *6460	2540 5600	7.23 (23.7)
1.5 m (4.9 ft)	kg lb			*7690 *16950	4810 10600	5590 12320	3240 7140	*3070 *6770	2420 5340	7.36 (24.1)
0.0 m (0.0 ft)	kg lb	*3900 *8600	*3900 *8600	*8180 *18030	4640 10230	5480 12080	3140 6920	*3410 *7520	2480 5470	7.16 (23.5)
-1.5 m (-4.9 ft)	kg lb	*9210 *20300	8540 18830	*7910 *17440	4610 10160	5460 12040	3120 6880	*4080 *8990	2760 6080	6.62 (21.7)
-3.0 m (-9.8 ft)	kg lb	*9400 *20720	8700 19180	*6720 *14820	4700 10360			*4890 *10780	3500 7720	5.62 (18.5)

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX180 NL	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		5100	2600	2900	600	-	-	-	-	-

·  : Rating over-front

·  : Rating over-side or 360 degree




Lift-point height (A)		Lift-point radius (B)										At max. reach		
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
														m (ft)
7.5 m (24.6 ft)	kg lb											*3400 *7500	*3400 *7500	4.85 (15.9)
6.0 m (19.7 ft)	kg lb							*3830 *8440	3600 7940			*2960 *6530	*2960 *6530	6.27 (20.6)
4.5 m (14.8 ft)	kg lb					*4890 *10780	*4890 *10780	*4450 *9810	3550 7830			*2840 *6260	2700 5950	7.10 (23.3)
3.0 m (9.8 ft)	kg lb			*9410 *20750	*9410 *20750	*6140 *13540	5210 11490	*4960 *10930	3420 7540	*3100 *6830	2420 5340	*2870 *6330	2400 5290	7.54 (24.7)
1.5 m (4.9 ft)	kg lb					*7420 *16360	4880 10760	*5550 *12240	3270 7210	4020 8860	2370 5220	*3050 *6720	2300 5070	7.66 (25.1)
0.0 m (0.0 ft)	kg lb			*5280 *11640	*5280 *11640	*8120 *17900	4670 10300	5490 12100	3160 6970			*3420 *7540	2340 5160	7.47 (24.5)
-1.5 m (-4.9 ft)	kg lb	*5070 *11180	*5070 *11180	*9170 *20220	8510 18760	*8060 *17770	4610 10160	5440 11990	3110 6860			*4130 *9110	2570 5670	6.95 (22.8)
-3.0 m (-9.8 ft)	kg lb	*9350 *20610	*9350 *20610	*10230 *22550	8640 19050	*7160 *15790	4660 10270	*4940 *10890	3170 6990			*4920 *10850	3160 6970	6.01 (19.7)
-4.5 m (-14.8 ft)	kg lb			*6920 *15260	*6920 *15260							*4590 *10120	*4590 *10120	4.39 (14.4)

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX180 NL	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		5100	3100	2900	600	-	-	-	-	-

·  : Rating over-front

·  : Rating over-side or 360 degree




Lift-point height (A)		Lift-point radius (B)										At max. reach		
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
														m (ft)
7.5 m (24.6 ft)	kg lb											*2690 *5930	*2690 *5930	5.51 (18.1)
6.0 m (19.7 ft)	kg lb							*3680 *8110	3650 8050			*2410 *5310	*2410 *5310	6.79 (22.3)
4.5 m (14.8 ft)	kg lb							*4040 *8910	3580 7890	*2550 *5620	2480 5470	*2330 *5140	*2330 *5140	7.56 (24.8)
3.0 m (9.8 ft)	kg lb			*7980 *17590	*7980 *17590	*5570 *12280	5280 11640	*4610 *10160	3440 7580	*3770 *8310	2430 5360	*2370 *5220	2190 4830	7.97 (26.2)
1.5 m (4.9 ft)	kg lb			*6730 *14840	*6730 *14840	*6970 *15370	4920 10850	*5270 *11620	3270 7210	4010 8840	2350 5180	*2520 *5560	2090 4610	8.09 (26.5)
0.0 m (0.0 ft)	kg lb			*6140 *13540	*6140 *13540	*7890 *17390	4660 10270	5470 12060	3130 6900	3940 8690	2290 5050	*2810 *6190	2120 4670	7.91 (25.9)
-1.5 m (-4.9 ft)	kg lb	*4780 *10540	*4780 *10540	*8740 *19270	8390 18500	*8090 *17840	4560 10050	5390 11880	3060 6750			*3360 *7410	2300 5070	7.42 (24.3)
-3.0 m (-9.8 ft)	kg lb	*8060 *17770	*8060 *17770	*11010 *24270	8490 18720	*7510 *16560	4570 10080	*5400 *11900	3080 6790			*4500 *9920	2750 6060	6.56 (21.5)
-4.5 m (-14.8 ft)	kg lb			*8340 *18390	*8340 *18390	*5690 *12540	4710 10380					*4680 *10320	3970 8750	5.11 (16.8)

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX180 NL	2-PIECE BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		5100	2200	3250	600	-	-	-	-	-

·  : Rating over-front

·  : Rating over-side or 360 degree




Lift-point height (A)		Lift-point radius (B)						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach
										m (ft)
7.5 m (24.6 ft)	kg lb							*4040 *8910	*4040 *8910	4.46 (14.6)
6.0 m (19.7 ft)	kg lb			*4490 *9900	*4490 *9900			*3260 *7190	*3260 *7190	5.98 (19.6)
4.5 m (14.8 ft)	kg lb			*5090 *11220	*5090 *11220	*4540 *10010	3660 8070	*2980 *6570	2930 6460	6.84 (22.5)
3.0 m (9.8 ft)	kg lb			*6250 *13780	5350 11790	*4980 *10980	3530 7780	*2910 *6420	2610 5750	7.30 (23.9)
1.5 m (4.9 ft)	kg lb			*7410 *16340	5010 11050	*5500 *12130	3380 7450	*3000 *6610	2500 5510	7.42 (24.3)
0.0 m (0.0 ft)	kg lb			*7990 *17610	4830 10650	5720 12610	3280 7230	*3240 *7140	2560 5640	7.23 (23.7)
-1.5 m (-4.9 ft)	kg lb	*8220 *18120	*8220 *18120	*7850 *17310	4810 10600	5710 12590	3260 7190	*3760 *8290	2860 6310	6.69 (21.9)

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX180 NL	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		5100	2600	3250	600	-	-	-	-	-

·  : Rating over-front





·  : Rating over-side or 360 degree



Lift-point height (A)		Lift-point radius (B)								At max. reach	
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity	
											
7.5 m (24.6 ft)	kg lb			*4310 *9500	*4310 *9500					*3560 *7850	*3560 *7850
6.0 m (19.7 ft)	kg lb					*4130 *9110	3770 8310			*3040 *6700	*3040 *6700
4.5 m (14.8 ft)	kg lb			*4680 *10320	*4680 *10320	*4250 *9370	3720 8200			*2860 *6310	2740 6040
3.0 m (9.8 ft)	kg lb			*5880 *12960	5450 12020	*4750 *10470	3570 7870	*3650 *8050	2530 5580	*2840 *6260	2460 5420
1.5 m (4.9 ft)	kg lb			*7140 *15740	5080 11200	*5340 *11770	3410 7520	4200 9260	2470 5450	*2960 *6530	2350 5180
0.0 m (0.0 ft)	kg lb			*7900 *17420	4870 10740	5740 12650	3290 7250	*3830 *8440	2430 5360	*3240 *7140	2400 5290
-1.5 m (-4.9 ft)	kg lb	*8270 *18230	*8270 *18230	*7960 *17550	4800 10580	5690 12540	3250 7170			*3790 *8360	2640 5820
-3.0 m (-9.8 ft)	kg lb			*7220 *15920	4870 10740						

6. BUCKET SELECTION GUIDE

1) GENERAL BUCKET

			
0.39 m³ SAE heaped bucket	0.50 m³ SAE heaped bucket	0.64, 0.70, 0.76 m³ SAE heaped bucket	0.89, 1.05 m³ SAE heaped bucket

Capacity		Width		Weight	Recommendation				
					5.1 m (16' 9") Mono boom			5.1 m (16' 9") Hyd adjustable boom	
SAE heaped	CECE heaped	Without side cutter	With side cutter		2.2 m arm (7' 3")	2.6 m arm (8' 6")	3.1 m arm (10' 2")	2.2 m arm (7' 3")	2.6 m arm (8' 6")
0.39 m³ (0.51 yd³)	0.34 m³ (0.44 yd³)	620 mm (24.4")	740 mm (29.1")	410 kg (900 lb)	○	○	○	○	○
0.50 m³ (0.65 yd³)	0.44 m³ (0.58 yd³)	760 mm (29.9")	880 mm (34.6")	470 kg (1040 lb)	○	○	○	○	○
0.64 m³ (0.84 yd³)	0.55 m³ (0.72 yd³)	920 mm (36.2")	1040 mm (40.9")	510 kg (1120 lb)	○	○	◐	○	○
0.70 m³ (0.92 yd³)	0.60 m³ (0.78 yd³)	990 mm (39.0")	1110 mm (43.7")	600 kg (1320 lb)	○	○	◐	○	◐
0.76 m³ (0.99 yd³)	0.65 m³ (0.85 yd³)	1060 mm (41.7")	1180 mm (46.5")	620 kg (1370 lb)	○	◐	●	◐	●
0.89 m³ (1.16 yd³)	0.77 m³ (1.01 yd³)	1220 mm (48.0")	1340 mm (52.8")	610 kg (1340 lb)	◐	●		◐	●
1.05 m³ (1.37 yd³)	0.90 m³ (1.18 yd³)	1400 mm (55.1")	1520 mm (59.8")	680 kg (1500 lb)	●	●		●	



Applicable for materials with density of 2000 kg/m³ (3370 lb/yd³) or less





Applicable for materials with density of 1600 kg/m³ (2700 lb/yd³) or less



Applicable for materials with density of 1100 kg/m³ (1850 lb/yd³) or less

2) HEAVY DUTY AND DITCH CLEANING BUCKET

	
◆ 0.69, 0.72, 0.87 m ³ SAE heaped bucket	⊙ 0.75 m ³ SAE heaped bucket

Capacity		Width		Weight	Recommendation				
					5.1 m (16' 9") Mono boom			5.1 m (16' 9") Hyd adjustable boom	
SAE heaped	CECE heaped	Without side cutter	With side cutter		2.2 m arm (7' 3")	2.6 m arm (8' 6")	3.1 m arm (10' 2")	2.2 m arm (7' 3")	2.6 m arm (8' 6")
◆0.69 m ³ (0.90 yd ³)	0.62 m ³ (0.81 yd ³)	990 mm (39.0")	-	720 kg (1590 lb)	○	⊙	●	⊙	●
◆0.72 m ³ (0.94 yd ³)	0.65 m ³ (0.85 yd ³)	940 mm (37.0")	985 mm (38.8")	640 kg (1410 lb)	○	⊙	●	⊙	●
◆0.87 m ³ (1.18 yd ³)	0.78 m ³ (1.02 yd ³)	1090 mm (42.9")	1140 mm (44.9")	680 kg (1500 lb)	⊙	●		●	
⊙0.75 m ³ (0.98 yd ³)	0.65 m ³ (0.85 yd ³)	1820 mm (71.7")	-	540 kg (1190 lb)	○	⊙	⊙	○	⊙

◆ : Heavy duty bucket ⊙ : Ditch cleaning bucket


-  Applicable for materials with density of 2000 kg/m³ (3370 lb/yd³) or less
-  Applicable for materials with density of 1600 kg/m³ (2700 lb/yd³) or less
-  Applicable for materials with density of 1100 kg/m³ (1850 lb/yd³) or less

7. UNDERCARRIAGE

1) TRACKS

X-leg type center frame is integrally welded with reinforced box-section track frames. The design includes dry tracks, lubricated rollers, idlers, sprockets, hydraulic track adjusters with shock absorbing springs and assembled track-type tractor shoes with triple grousers.

2) TYPES OF SHOES

Model	Shapes		Triple grouser			
						
HX180 L	Shoe width	mm (in)	500 (20)	600 (24)	700 (28)	800 (32)
	Operating weight	kg (lb)	18545 (40880)	18800 (41450)	18795 (41480)	19050 (42000)
	Ground pressure	kgf/cm ² (psi)	0.51 (7.25)	0.43 (6.11)	0.37 (5.26)	0.33 (4.69)
	Overall width	mm (ft-in)	2750 (9' 0")	2850 (9' 4")	2950 (9' 8")	3050 (10' 0")
HX180 L (with dozer)	Shoe width	mm (in)	500 (20)	600 (24)	700 (28)	800 (32)
	Operating weight	kg (lb)	19445 (42870)	19700 (43430)	19950 (43980)	20205 (44540)
	Ground pressure	kgf/cm ² (psi)	0.54 (7.68)	0.45 (6.40)	0.39 (5.55)	0.35 (4.98)
	Overall width	mm (ft-in)	2750 (9' 0")	2850 (9' 4")	2950 (9' 8")	3050 (10' 0")

3) NUMBER OF ROLLERS AND SHOES ON EACH SIDE

Item	Quantity
Carrier rollers	2 EA
Track rollers	7 EA
Track shoes	51 EA

4) SELECTION OF TRACK SHOE

Suitable track shoes should be selected according to operating conditions.

Method of selecting shoes

Confirm the category from the list of applications in **table 2**, then use **table 1** to select the shoe. Wide shoes (categories B and C) have limitations on applications. Before using wide shoes, check the precautions, then investigate and study the operating conditions to confirm if these shoes are suitable.

Select the narrowest shoe possible to meet the required flotation and ground pressure. Application of wider shoes than recommendations will cause unexpected problem such as bending of shoes, crack of link, breakage of pin, loosening of shoe bolts and the other various problems.

※ **Table 1**

Track shoe	Specification	Category
500 mm triple grouser	Option	A
600 mm triple grouser	Standard	A
700 mm triple grouser	Option	B
800 mm triple grouser	Option	C

※ **Table 2**

Category	Applications	Applications
A	Rocky ground, river beds, normal soil	· Travel at low speed on rough ground with large obstacles such as boulders or fallen trees
B	Normal soil, soft ground	· These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees · Travel at high speed only on flat ground · Travel slowly at low speed if it is impossible to avoid going over obstacles
C	Extremely soft ground (swampy ground)	· Use the shoes only in the conditions that the machine sinks and it is impossible to use the shoes of category A or B · These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees · Travel at high speed only on flat ground · Travel slowly at low speed if it is impossible to avoid going over obstacles

8. SPECIFICATIONS FOR MAJOR COMPONENTS

1) ENGINE

Item	Specification
Model	Perkins 1204F
Type	4-cycle turbocharged charge air cooled diesel engine
Cooling method	Water cooling
Number of cylinders and arrangement	4 cylinders, in-line
Firing order	1-3-4-2
Combustion chamber type	Direct injection type
Cylinder bore × stroke	105 × 127 mm (4.1" × 5.0")
Piston displacement	4400 cc (268.5 cu in)
Compression ratio	16.5 : 1
Rated net horse power (SAE J1349)	128Hp (96 kW) at 2050 rpm
Rated gross horse power (SAE J1995)	137Hp (102.1 kW) at 2050 rpm
Maximum torque	57.1 kgf · m (413 lbf · ft) at 1400 rpm
Engine oil quantity	10.5 ℓ (2.8 U.S. gal)
Dry weight	589 kg (1300 lb)
High idling speed	2100 ± 50 rpm
Low idling speed	800 ± 100 rpm
Rated fuel consumption	164 g/Hp · hr at 2050 rpm
Starting motor	24 V-4.5 kW
Alternator	24 V-100 A
Battery	2 × 12 V × 100 Ah

2) MAIN PUMP

Item	Specification
Type	Variable displacement tandem axis piston pumps
Capacity	2 × 80 cc/rev
Maximum pressure	350 kgf/cm ² (4980 psi) [380 kgf/cm ² (5400 psi)]
Rated oil flow	2 × 164 ℓ /min (43.3 U.S. gpm / 36.1 U.K. gpm)
Maximum speed	2100 rpm

[] : Power boost

3) GEAR PUMP

Item	Specification
Type	Fixed displacement gear pump single stage
Capacity	15cc/rev
Maximum pressure	40 kgf/cm ² (570 psi)
Rated oil flow	31.5 ℓ /min (8.3 U.S. gpm / 6.9 U.K. gpm)

4) MAIN CONTROL VALVE

Item	Specification
Type	11 spools two-block
Operating method	Hydraulic pilot system
Main relief valve pressure	350 kgf/cm ² (4980 psi) [380 kgf/cm ² (5400 psi)]
Overload relief valve pressure	400 kgf/cm ² (5690 psi)

[] : Power boost

5) SWING MOTOR

Item	Specification
Type	Axial pistons motor
Capacity	142.8 cc/rev
Relief pressure	285 kgf/cm ² (4053 psi)
Braking system	Automatic, spring applied hydraulic released
Braking torque	66.5 kgf · m (481 lbf · ft)
Brake release pressure	22.3~36.6 kgf/cm ² (317~521 psi)
Reduction gear type	2 - stage planetary

6) TRAVEL MOTOR

Item	Specification
Type	Two speed axial pistons motor with brake valve and parking brake
Relief pressure	350 kgf/cm ² (4980 psi)
Reduction gear type	Planetary & differential type
Braking system	Automatic, spring applied hydraulic released
Brake release pressure	11 kgf/cm ² (156 psi)
Braking torque	49.3 kgf · m (357 lbf · ft)

7) CYLINDER

Item		Specification
Boom cylinder	Bore dia × Rod dia × Stroke	Ø 115 × Ø 80 × 1090 mm
	Cushion	Extend only
Arm cylinder	Bore dia × Rod dia × Stroke	Ø 120 × Ø 85 × 1355 mm
	Cushion	Extend and retract
Bucket cylinder	Bore dia × Rod dia × Stroke	Ø 110 × Ø 75 × 995 mm
	Cushion	Extend only
Adjust cylinder(opt)	Bore dia × Rod dia × Stroke	Ø 160 × Ø 85 × 650 mm
	-	-
Adjust boom cylinder(opt)	Bore dia × Rod dia × Stroke	Ø 115 × Ø 80 × 960 mm
	-	-
Dozer cylinder(opt)	Bore dia × Rod dia × Stroke	Ø 110 × Ø 85 × 320 mm
	-	-

※ Discoloration of cylinder rod can occur when the friction reduction additive of lubrication oil spreads on the rod surface.

※ Discoloration does not cause any harmful effect on the cylinder performance.

8) SHOE

Item		Width	Ground pressure	Link quantity	Overall width
HX180 L	Option	500 mm (20")	0.51 kgf/cm ² (7.25 psi)	51	2750 mm (9' 0")
	Standard	600 mm (24")	0.43 kgf/cm ² (6.11 psi)	51	2850 mm (9' 4")
	Option	700 mm (28")	0.37 kgf/cm ² (5.26 psi)	51	2950 mm (9' 8")
	Option	800 mm (32")	0.33 kgf/cm ² (4.69 psi)	51	3050 mm (10' 0")

9) BUCKET

Item	Capacity		Tooth quantity	Width	
	SAE heaped	CECE heaped		Without side cutter	With side cutter
HX180 L	0.76 m ³ (0.99 yd ³)	0.65 m ³ (0.85 yd ³)	5	1060 mm (41.7")	1180 mm (46.5")
	0.39 m ³ (0.51 yd ³)	0.34 m ³ (0.44 yd ³)	3	620 mm (24.4")	740 mm (29.1")
	0.50 m ³ (0.65 yd ³)	0.44 m ³ (0.58 yd ³)	4	760 mm (29.9")	880 mm (34.6")
	0.64 m ³ (0.84 yd ³)	0.55 m ³ (0.72 yd ³)	5	920 mm (36.2")	1040 mm (40.9")
	0.70 m ³ (0.92 yd ³)	0.60 m ³ (0.78 yd ³)	5	990 mm (39.0")	1110 mm (43.7")
	0.89 m ³ (1.16 yd ³)	0.77 m ³ (1.01 yd ³)	6	1220 mm (48.0")	1340 mm (52.8")
	1.05 m ³ (1.37 yd ³)	0.90 m ³ (1.18 yd ³)	6	1400 mm (55.1")	1520 mm (59.8")
	◆ 0.69 m ³ (0.90 yd ³)	0.62 m ³ (0.81 yd ³)	5	990 mm (39.0")	-
	★ 0.75 m ³ (0.98 yd ³)	0.65 m ³ (0.85 yd ³)	-	1820 mm (71.7")	-

◆ : Heavy duty bucket

★ : Ditch cleaning bucket

9. RECOMMENDED OILS

HD Hyundai Construction Equipment genuine lubricating oils have been developed to offer the best performance and service life for your equipment. These oils have been tested according to the specifications of HD Hyundai Construction Equipment and, therefore, will meet the highest safety and quality requirements.

We recommend that you use only HD Hyundai Construction Equipment genuine lubricating oils and grease officially approved by HD Hyundai Construction Equipment.

Service point	Kind of fluid	Capacity ℓ (U.S. gal)	Ambient temperature °C (°F)								
			-50 (-58)	-30 (-22)	-20 (-4)	-10 (14)	0 (32)	10 (50)	20 (68)	30 (86)	40 (104)
Engine oil pan	Engine oil	10.5 (2.8)	★SAE 5W-40								
							SAE 30				
				SAE 10W							
				SAE 10W-30							
				SAE 15W-40							
DEF/ AdBlue® Tank	Mixture of urea and deionized water	19.0 (5.0)	ISO 22241, High-purity urea + deionized water (32.5:67.5)								
Swing drive	Gear oil	TYPE 1 : 5.0 (1.32)	★SAE 75W-90								
		TYPE 2 : 6.2 (1.64)									
Final drive		5.8×2 (1.5×2)	SAE 80W-90								
Hydraulic tank	Hydraulic oil	Tank : 125 (33.0)	★ISO VG 15								
				ISO VG 32							
		System : 240 (63.4)		ISO VG 46, HBHO VG 46★ ³							
				ISO VG 68							
Fuel tank	Diesel fuel★ ¹	290 (76.6)	★ASTM D975 NO.1								
				ASTM D975 NO.2							
Fitting (grease nipple)	Grease	As required	★NLGI NO.1								
				NLGI NO.2							
Radiator (reservoir tank)	Mixture of antifreeze and soft water★ ²	27.5 (7.3)	Ethylene glycol base permanent type (50 : 50)								
			★Ethylene glycol base permanent type (60 : 40)								

SAE : Society of Automotive Engineers

API : American Petroleum Institute

ISO : International Organization for Standardization

NLGI : National Lubricating Grease Institute

ASTM : American Society of Testing and Material

DEF : Diesel Exhaust Fluid, DEF compatible with AdBlue®

★ : Cold region (Russia, CIS, Mongolia)

★¹ : Ultra low sulfur diesel
- sulfur content ≤ 15 ppm

★² : Soft water
City water or distilled water

★³ : HD Hyundai Construction Equipment
Bio Hydraulic Oil

※ Using any lubricating oils other than HD Hyundai Construction Equipment genuine products may lead to a deterioration of performance and cause damage to major components.

※ Do not mix HD Hyundai Construction Equipment genuine oil with any other lubricating oil as it may result in damage to the systems of major components.

※ Do not use any engine oil other than that specified above, as it may clog the diesel particulate filter(DPF).

※ For HD Hyundai Construction Equipment genuine lubricating oils and grease for use in regions with extremely low temperatures, please contact HD Hyundai Construction Equipment dealers.