
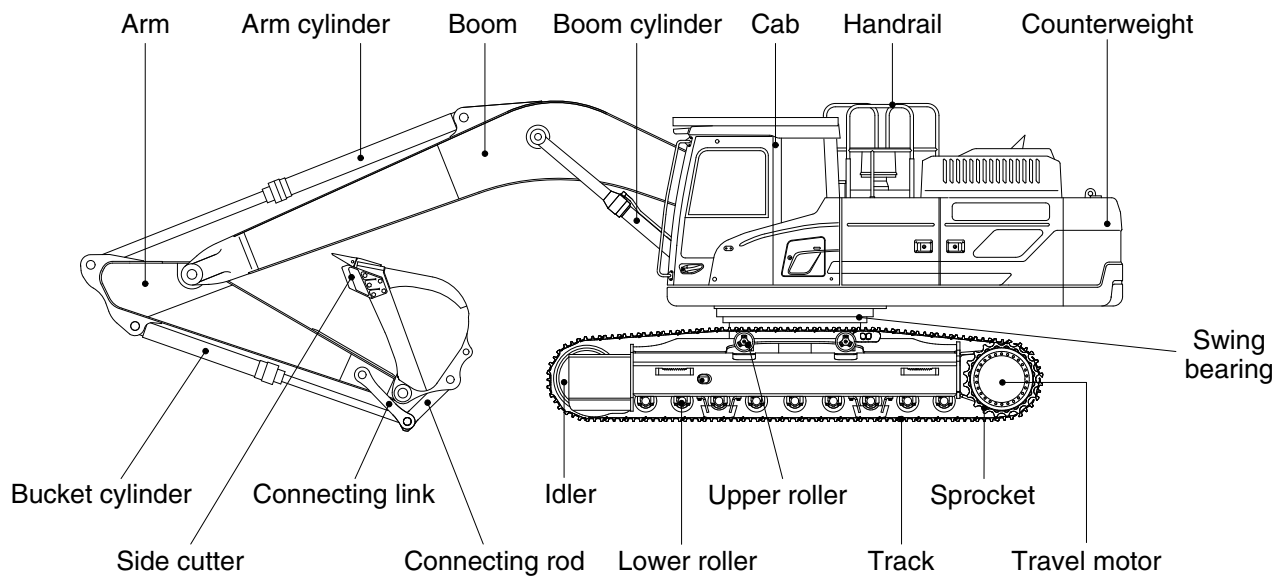


SPECIFICATIONS


1. MAJOR COMPONENT

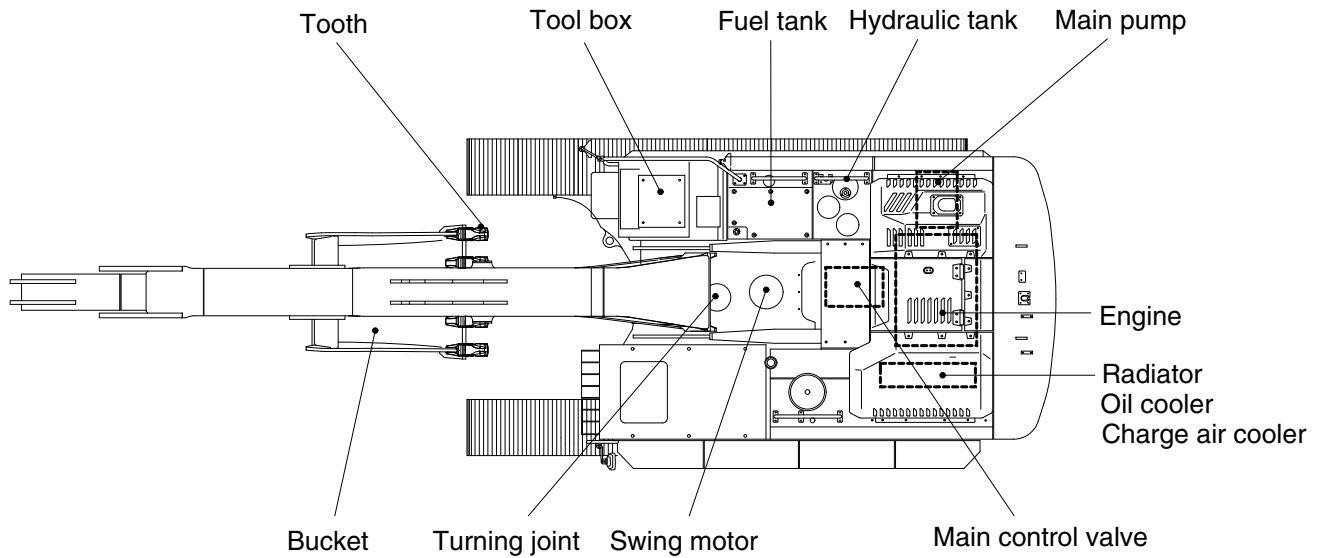

400SA2SP01

2. SPECIFICATIONS


1) HX400 LT3 (1/2)

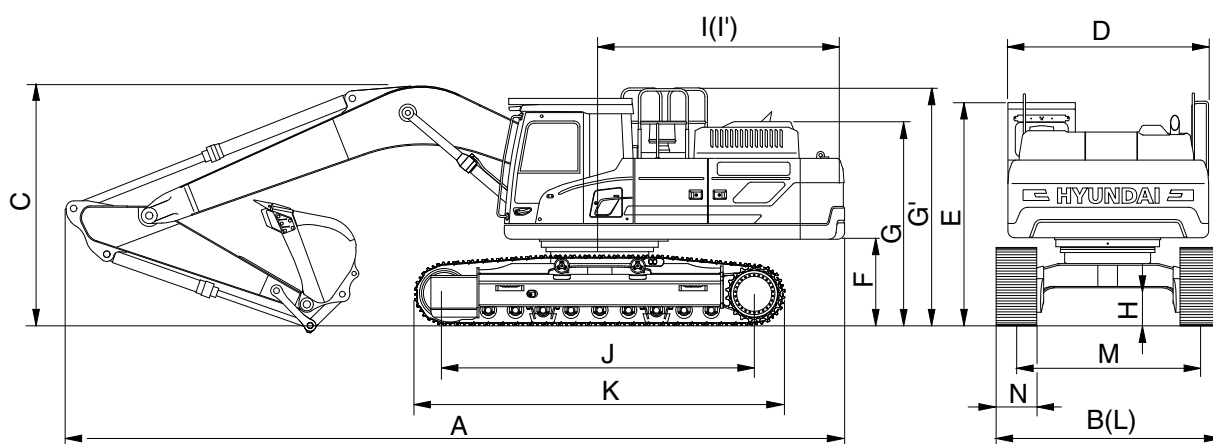

400SA2SP02

Description	Unit		Specification			
	m (ft-in)	Boom	6.50 (21' 4")			
		Arm	2.55 (8' 4")	2.80 (9' 2")	3.20 (10' 6")	3.90 (12' 10")
	mm (in)	Shoe	600 (24)			
Operating weight	kg (lb)		38300 (84440)	38340 (84530)	38420 (84700)	38510 (84900)
Bucket capacity (SAE heaped), standard	m ³ (yd ³)		1.62 (2.12)	1.62 (2.12)	1.62 (2.12)	1.62 (2.12)
Overall length	A	mm (ft-in)	11430 (37' 6")	11430 (37' 6")	11410 (37' 5")	11400 (37' 5")
Overall width	B		3380 (11' 1")	3380 (11' 1")	3380 (11' 1")	3380 (11' 1")
Overall width with additional footboard	B'		3565 (11' 8")	3565 (11' 8")	3565 (11' 8")	3565 (11' 8")
Overall height of boom	C		3670 (12' 0")	3690 (12' 1")	3560 (11' 8")	3690 (12' 1")
Superstructure width (with catwalk)	D		3300 (10' 10")	3300 (10' 10")	3300 (10' 10")	3300 (10' 10")
Superstructure width (with protector)	D		3110 (10' 2")	3110 (10' 2")	3110 (10' 2")	3110 (10' 2")
Overall height of cab	E		3240 (10' 8")	3240 (10' 8")	3240 (10' 8")	3240 (10' 8")
Ground clearance of counterweight	F		1295 (4' 3")	1295 (4' 3")	1295 (4' 3")	1295 (4' 3")
Overall height of engine hood	G		2770 (9' 1")	2770 (9' 1")	2770 (9' 1")	2770 (9' 1")
Overall height of handrail	G'		3440 (11' 3")	3440 (11' 3")	3440 (11' 3")	3440 (11' 3")
Minimum ground clearance	H		555 (1' 10")	555 (1' 10")	555 (1' 10")	555 (1' 10")
Rear-end distance	I		3555 (11' 8")	3555 (11' 8")	3555 (11' 8")	3555 (11' 8")
Rear-end swing radius	I'		3620 (11' 11")	3620 (11' 11")	3620 (11' 11")	3620 (11' 11")
Distance between tumblers	J		4340 (14' 3")	4340 (14' 3")	4340 (14' 3")	4340 (14' 3")
Undercarriage length (without grouser)	K		5217 (17' 1")	5217 (17' 1")	5217 (17' 1")	5217 (17' 1")
Undercarriage length (with grouser)	K		5289 (17' 4")	5289 (17' 4")	5289 (17' 4")	5289 (17' 4")
Undercarriage width	L		3380 (11' 1")	3380 (11' 1")	3380 (11' 1")	3380 (11' 1")
Undercarriage width with additional footboard	L'		3565 (11' 8")	3565 (11' 8")	3565 (11' 8")	3565 (11' 8")
Track gauge	M		2740 (9' 0")	2740 (9' 0")	2740 (9' 0")	2740 (9' 0")
Track shoe width, standard	N		600 (2' 0")	600 (2' 0")	600 (2' 0")	600 (2' 0")
Travel speed (low/high)	km/hr (mph)		3.2/5.3 (2.0/3.3)	3.2/5.3 (2.0/3.3)	3.2/5.3 (2.0/3.3)	3.2/5.3 (2.0/3.3)
Swing speed	rpm		9.1	9.1	9.1	9.1
Gradeability	Degree (%)		35 (70)	35 (70)	35 (70)	35 (70)
Ground pressure	kgf/cm ² (psi)		0.69 (9.77)	0.69 (9.79)	0.69 (9.80)	0.69 (9.83)
Max traction force	kg (lb)		31613 (69694)	31613 (69694)	31613 (69694)	31613 (69694)


2) HX400 LT3 (2/2)

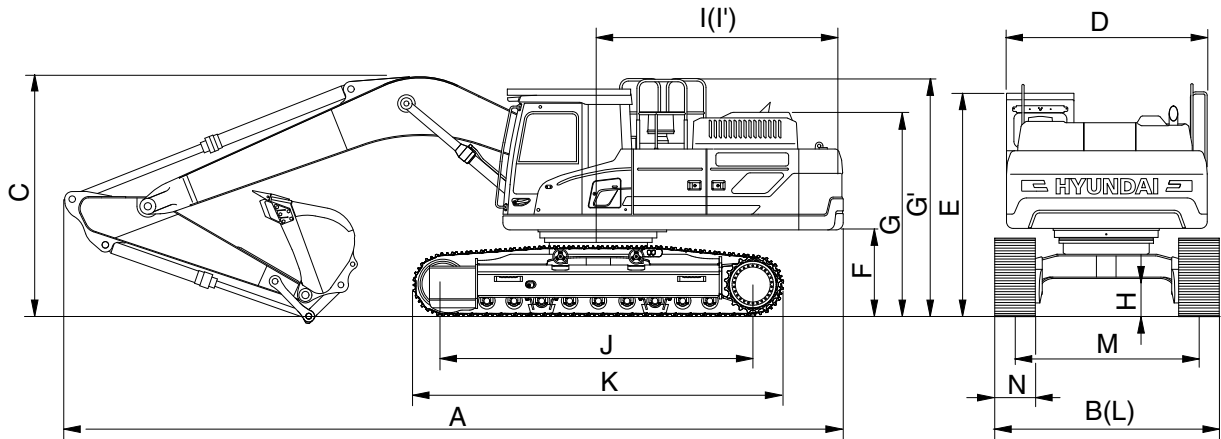

400SA2SP02

Description		Unit		Specification	
		m (ft-in)	Boom	6.15 (20' 2")	
			Arm	2.55 (8' 4")	2.80 (9' 2")
		mm (in)	Shoe	600 (24)	
Operating weight		kg (lb)		37500 (82670)	37540 (82760)
Bucket capacity (SAE heaped), standard		m³ (yd³)		1.62 (2.12)	1.62 (2.12)
Overall length	A	mm (ft-in)		11070 (36' 4")	11070 (36' 4")
Overall width	B			3380 (11' 1")	3380 (11' 1")
Overall width with additional footboard	B'			3565 (11' 8")	3565 (11' 8")
Overall height of boom	C			3710 (12' 2")	3720 (12' 2")
Superstructure width (with catwalk)	D			3300 (10' 10")	3300 (10' 10")
Superstructure width (with protector)	D			3110 (10' 2")	3110 (10' 2")
Overall height of cab	E			3240 (10' 8")	3240 (10' 8")
Ground clearance of counterweight	F			1295 (4' 3")	1295 (4' 3")
Overall height of engine hood	G			2770 (9' 1")	2770 (9' 1")
Overall height of handrail	G'			3440 (11' 3")	3440 (11' 3")
Minimum ground clearance	H			555 (1' 10")	555 (1' 10")
Rear-end distance	I			3555 (11' 8")	3555 (11' 8")
Rear-end swing radius	I'			3620 (11' 11")	3620 (11' 11")
Distance between tumblers	J			4340 (14' 3")	4340 (14' 3")
Undercarriage length (without grouser)	K			5217 (17' 1")	5217 (17' 1")
Undercarriage length (with grouser)	K			5289 (17' 4")	5289 (17' 4")
Undercarriage width	L			3380 (11' 1")	3380 (11' 1")
Undercarriage width with additional footboard	L'			3565 (11' 8")	3565 (11' 8")
Track gauge	M			2740 (9' 0")	2740 (9' 0")
Track shoe width, standard	N			600 (2' 0")	600 (2' 0")
Travel speed (low/high)		km/hr (mph)		3.2/5.3 (2.0/3.3)	3.2/5.3 (2.0/3.3)
Swing speed		rpm		9.1	9.1
Gradeability		Degree (%)		35 (70)	35 (70)
Ground pressure		kgf/cm² (psi)		0.67 (9.56)	0.67 (9.57)
Max traction force		kg (lb)		31613 (69694)	31613 (69694)


3) HX400 NLT3 (1/2)

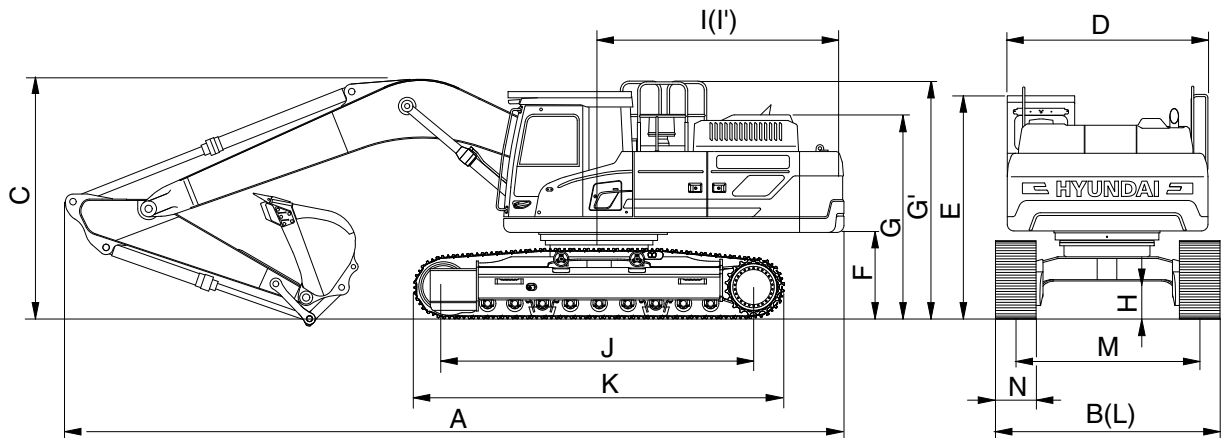

400SA2SP02

Description	Unit		Specification			
	m (ft-in)	Boom	6.50 (21' 4")			
		Arm	2.55 (8' 4")	2.80 (9' 2")	3.20 (10' 6")	3.90 (12' 10")
	mm (in)	Shoe	600 (24)			
Operating weight	kg (lb)		38890 (85740)	38930 (85830)	39010 (86000)	39100 (86200)
Bucket capacity (SAE heaped), standard	m ³ (yd ³)		1.62 (2.12)	1.62 (2.12)	1.62 (2.12)	1.62 (2.12)
Overall length	A	mm (ft-in)	11430 (37' 6")	11430 (37' 6")	11410 (37' 5")	11400 (37' 5")
Overall width (with catwalk)	B		3300 (10' 10")	3300 (10' 10")	3300 (10' 10")	3300 (10' 10")
Overall width (with protector)	B'		3110 (10' 2")	3110 (10' 2")	3110 (10' 2")	3110 (10' 2")
Overall height of boom	C		3670 (12' 0")	3690 (12' 1")	3560 (11' 8")	3690 (12' 1")
Superstructure width (with catwalk)	D		3300 (10' 10")	3300 (10' 10")	3300 (10' 10")	3300 (10' 10")
Superstructure width (with protector)	D'		3110 (10' 2")	3110 (10' 2")	3110 (10' 2")	3110 (10' 2")
Overall height of cab	E		3240 (10' 8")	3240 (10' 8")	3240 (10' 8")	3240 (10' 8")
Ground clearance of counterweight	F		1295 (4' 3")	1295 (4' 3")	1295 (4' 3")	1295 (4' 3")
Overall height of engine hood	G		2770 (9' 1")	2770 (9' 1")	2770 (9' 1")	2770 (9' 1")
Overall height of handrail	G'		3440 (11' 3")	3440 (11' 3")	3440 (11' 3")	3440 (11' 3")
Minimum ground clearance	H		555 (1' 10")	555 (1' 10")	555 (1' 10")	555 (1' 10")
Rear-end distance	I		3555 (11' 8")	3555 (11' 8")	3555 (11' 8")	3555 (11' 8")
Rear-end swing radius	I'		3620 (11' 11")	3620 (11' 11")	3620 (11' 11")	3620 (11' 11")
Distance between tumblers	J		4340 (14' 3")	4340 (14' 3")	4340 (14' 3")	4340 (14' 3")
Undercarriage length (without grouser)	K		5217 (17' 1")	5217 (17' 1")	5217 (17' 1")	5217 (17' 1")
Undercarriage length (with grouser)	K		5289 (17' 4")	5289 (17' 4")	5289 (17' 4")	5289 (17' 4")
Undercarriage width	L	mm (ft-in)	3030 (9' 11")	3030 (9' 11")	3030 (9' 11")	3030 (9' 11")
Undercarriage width with additional footboard	L'		3030 (9' 11")	3030 (9' 11")	3030 (9' 11")	3030 (9' 11")
Track gauge	M		2390 (7' 10")	2390 (7' 10")	2390 (7' 10")	2390 (7' 10")
Track shoe width, standard	N		600 (2' 0")	600 (2' 0")	600 (2' 0")	600 (2' 0")
Travel speed (low/high)	km/hr (mph)		3.3/5.3 (2.1/3.3)	3.3/5.3 (2.1/3.3)	3.3/5.3 (2.1/3.3)	3.3/5.3 (2.1/3.3)
Swing speed	rpm		8.6	8.6	8.6	8.6
Gradeability	Degree (%)		35 (70)	35 (70)	35 (70)	35 (70)
Ground pressure	kgf/cm ² (psi)		0.70 (9.91)	0.70 (9.93)	0.70 (9.96)	0.70 (9.97)
Max traction force	kg (lb)		34100 (75180)	34100 (75180)	34100 (75180)	34100 (75180)

4) HX400 NLT3 (2/2)

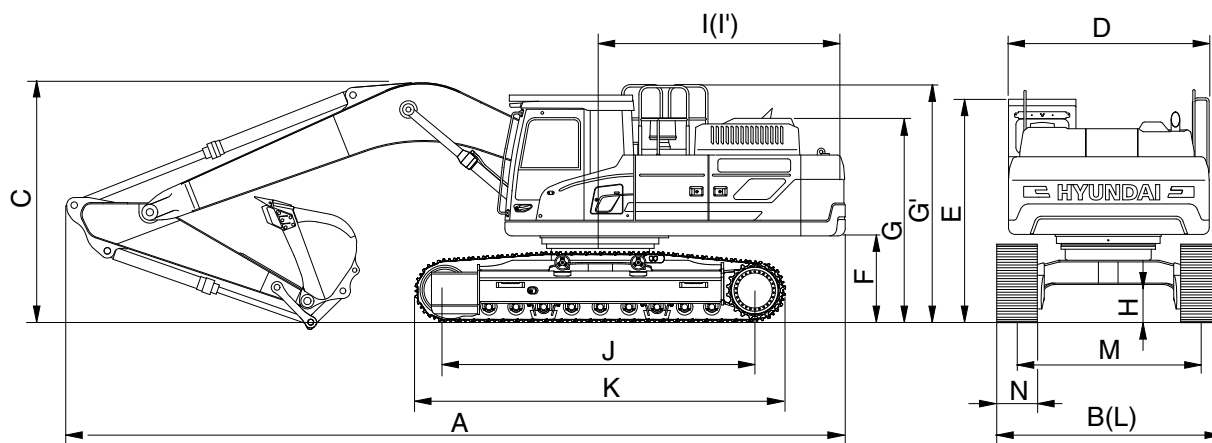


400SA2SP02

Description		Unit		Specification	
		m (ft-in)	Boom	6.15 (20' 2")	
			Arm	2.55 (8' 4")	2.80 (9' 2")
		mm (in)	Shoe	600 (24)	
Operating weight		kg (lb)		38940 (85850)	38980 (85940)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)		1.62 (2.12)	1.62 (2.12)
Overall length	A	mm (ft-in)		11070 (36' 4")	11070 (36' 4")
Overall width (with catwalk)	B			3300 (10' 10")	3300 (10' 10")
Overall width (with protector)	B'			3110 (10' 2")	3110 (10' 2")
Overall height of boom	C			3710 (12' 2")	3720 (12' 2")
Superstructure width (with catwalk)	D			3300 (10' 10")	3300 (10' 10")
Superstructure width (with protector)	D			3110 (10' 2")	3110 (10' 2")
Overall height of cab	E			3240 (10' 8")	3240 (10' 8")
Ground clearance of counterweight	F			1295 (4' 3")	1295 (4' 3")
Overall height of engine hood	G			2770 (9' 1")	2770 (9' 1")
Overall height of handrail	G'			3440 (11' 3")	3440 (11' 3")
Minimum ground clearance	H			555 (1' 10")	555 (1' 10")
Rear-end distance	I			3555 (11' 8")	3555 (11' 8")
Rear-end swing radius	I'			3620 (11' 11")	3620 (11' 11")
Distance between tumblers	J			4340 (14' 3")	4340 (14' 3")
Undercarriage length (without grouser)	K			5217 (17' 1")	5217 (17' 1")
Undercarriage length (with grouser)	K			5289 (17' 4")	5289 (17' 4")
Undercarriage width	L			3030 (9' 11")	3030 (9' 11")
Undercarriage width with additional footboard	L'			3030 (9' 11")	3030 (9' 11")
Track gauge	M			2390 (7' 10")	2390 (7' 10")
Track shoe width, standard	N			600 (2' 0")	600 (2' 0")
Travel speed (low/high)		km/hr (mph)		3.3/5.3 (2.1/3.3)	3.3/5.3 (2.1/3.3)
Swing speed		rpm		8.6	8.6
Gradeability		Degree (%)		35 (70)	35 (70)
Ground pressure		kgf/cm ² (psi)		0.70 (9.93)	0.70 (9.94)
Max traction force		kg (lb)		34100 (75180)	34100 (75180)

3. WORKING RANGE AND DIGGING FORCE


1) HX400 LT3/NLT3 (1/2)

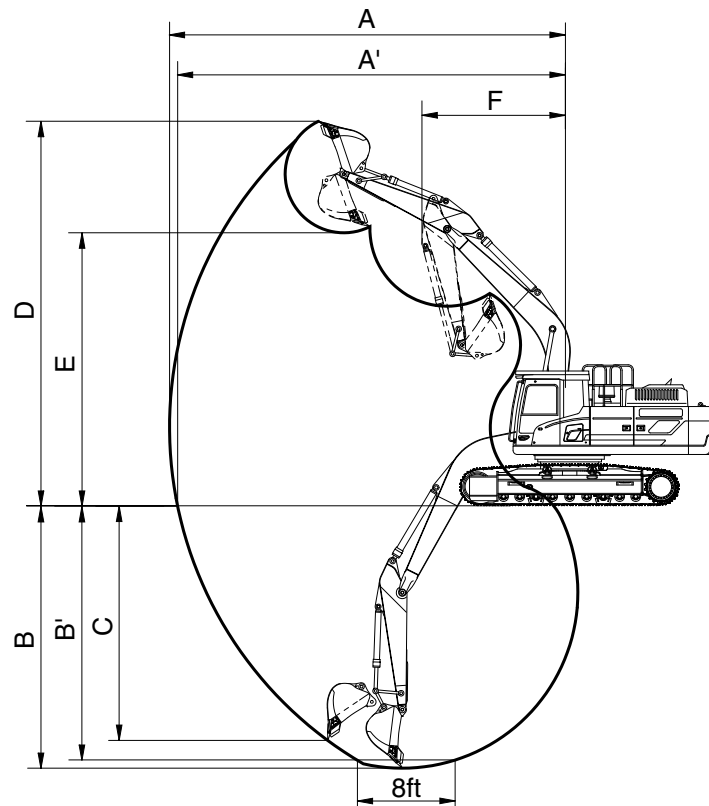

400SA2SP10

Description	m (ft-in)	Boom				
		Arm	6.50 (21' 4")			
Max digging reach	mm (ft-in)	A	10800 (35' 5")	11040 (36' 3")	11270 (37' 0")	11920 (39' 1")
Max digging reach on ground		A'	10580 (34' 9")	10820 (35' 6")	11050 (36' 3")	11710 (38' 5")
Max digging depth		B	6710 (22' 0")	6960 (22' 10")	7360 (24' 2")	8060 (26' 5")
Max digging depth (8 ft level)		B'	6530 (21' 5")	6780 (22' 3")	7180 (23' 7")	7880 (25' 10")
Max vertical wall digging depth		C	5020 (16' 6")	5230 (17' 2")	4870 (16' 0")	6010 (19' 9")
Max digging height		D	10800 (35' 5")	10940 (35' 11")	10680 (35' 0")	11080 (36' 4")
Max dumping height		E	7480 (24' 6")	7620 (25' 0")	7480 (24' 6")	7810 (25' 7")
Min swing radius		F	4250 (13' 11")	4280 (14' 1")	4310 (14' 2")	4070 (13' 4")
Bucket digging force	kN	SAE	211.8	211.8	211.8	211.8
	kgf		21600	21600	21600	21600
	lbf		47620	47620	47620	47620
	kN	ISO	242.2	242.2	242.2	242.2
	kgf		24700	24700	24700	24700
	lbf		54454	54454	54454	54454
Arm digging force	kN	SAE	197.1	186.3	170.6	146.1
	kgf		20100	19000	17400	14900
	lbf		44313	41888	38360	32849
	kN	ISO	205.0	193.2	176.5	150.0
	kgf		20900	19700	18000	15300
	lbf		46077	43431	39683	33731

2) HX400 LT3/NLT3 (2/2)

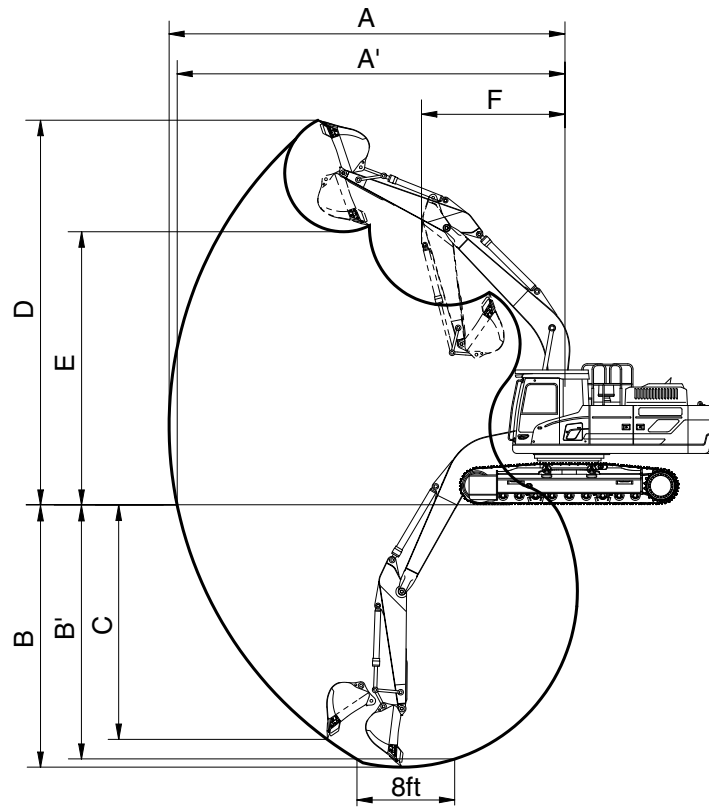

400SA2SP10

Description	m (ft-in)	Boom	6.15 (20' 2")	
		Arm	2.55 (8' 4")	2.80 (9' 2")
Max digging reach	mm (ft-in)	A	10430 (34' 3")	10660 (35' 0")
Max digging reach on ground		A'	10190 (33' 5")	10430 (34' 3")
Max digging depth		B	6460 (21' 2")	6710 (22' 0")
Max digging depth (8 ft level)		B'	6290 (20' 8")	6550 (21' 6")
Max vertical wall digging depth		C	4650 (15' 3")	4860 (15' 11")
Max digging height		D	10390 (34' 1")	10510 (34' 6")
Max dumping height		E	7100 (23' 4")	7230 (23' 9")
Min swing radius		F	4100 (13' 5")	4120 (13' 6")
Bucket digging force	kN	SAE	211.8	211.8
	kgf		21600	21600
	lbf		47620	47620
	kN	ISO	242.2	242.2
	kgf		24700	24700
	lbf		54454	54454
Arm digging force	kN	SAE	197.1	186.3
	kgf		20100	19000
	lbf		44313	41888
	kN	ISO	205.0	193.2
	kgf		20900	19700
	lbf		46077	43431

4. WEIGHT

Item	HX400 LT3	
	kg	lb
Upperstructure assembly		
· Main frame weld assembly	3191	7035
· Engine assembly	738	1627
· Main pump assembly	193	425
· Main control valve assembly	380	838
· Swing motor assembly	443	977
· Hydraulic oil tank WA	415	914
· Fuel tank WA	349	769
· Counterweight	6200	13669
· Cab assembly	495	1092
Lower chassis assembly		
· Track frame weld assembly	5236	11543
· Swing bearing	547	1206
· Travel motor assembly	380	838
· Turning joint	37	82
· Sprocket (2EA)	170	375
· Track recoil spring (2EA)	455	1003
· Idler (2EA)	522	1151
· Upper roller (4EA)	161	355
· Lower roller (18EA)	1431	3155
· Track-chain assembly (600 mm triple grouser shoe) (2EA)	5111	11268
· Track-chain assembly (600 mm double grouser shoe) (2EA)	4666	10287
· Track-chain assembly (700 mm triple grouser shoe) (2EA)	5116	11279
· Track-chain assembly (800 mm triple grouser shoe) (2EA)	5564	12266
· Track-chain assembly (900 mm triple grouser shoe) (2EA)	6014	13258
Front attachment assembly		
· 6.50 m boom assembly	3750	8267
· 3.20 m arm assembly	2080	4586
· 1.62 m³ SAE heaped bucket	1500	3307
· Boom cylinder assembly (2EA)	357	787
· Arm cylinder assembly	447	985
· Bucket cylinder assembly	309	681
· Bucket control linkage total	280	617

※ This information is different with operating and transportation weight because it is not including harness, pipe, oil, fuel so on.


※ Refer to Transportation for actual weight information and Specifications for operating weight.











5. LIFTING CAPACITIES

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX400LT3	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		6150	2550	6200	600	-	-	-	-	-

·  : Rating over-front

·  : Rating over-side or 360 degree



Lift-point height (A)		Lift-point radius (B)								At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
												m (ft)
7.5 m (24.6 ft)	kg lb					*10350 *22820	*10350 *22820			*10350 *22820	8950 19730	6.77 (22.2)
6.0 m (19.7 ft)	kg lb					*10870 *23960	10850 23920	*10290 *22690	7480 16490	*9880 *21780	7060 15560	7.74 (25.4)
4.5 m (14.8 ft)	kg lb			*15550 *34280	*15550 *34280	*12260 *27030	10350 22820	*10730 *23660	7300 16090	*9870 *21760	6130 13510	8.32 (27.3)
3.0 m (9.8 ft)	kg lb			*19270 *42480	14810 32650	*13940 *30730	9760 21520	*11500 *25350	7020 15480	9350 20610	5680 12520	8.60 (28.2)
1.5 m (4.9 ft)	kg lb			*17690 *39000	14000 30860	*15310 *33750	9280 20460	11340 25000	6770 14930	9200 20280	5550 12240	8.61 (28.2)
0.0 m (0.0 ft)	kg lb			*21680 *47800	13760 30340	15800 34830	9020 19890	11170 24630	6620 14590	9560 21080	5730 12630	8.34 (27.4)
-1.5 m (-4.9 ft)	kg lb	*14680 *32360	*14680 *32360	*20660 *45550	13800 30420	*15560 *34300	8980 19800	11170 24630	6620 14590	10610 23390	6330 13960	7.78 (25.5)
-3.0 m (-9.8 ft)	kg lb	*24210 *53370	*24210 *53370	*18310 *40370	14070 31020	*13840 *30510	9150 20170			*11480 *25310	7700 16980	6.83 (22.4)
-4.5 m (-14.8 ft)	kg lb			*13400 *29540	*13400 *29540					*10800 *23810	*10800 *23810	5.31 (17.4)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.


Lifting capacities will vary with different work tools, ground conditions and attachments.









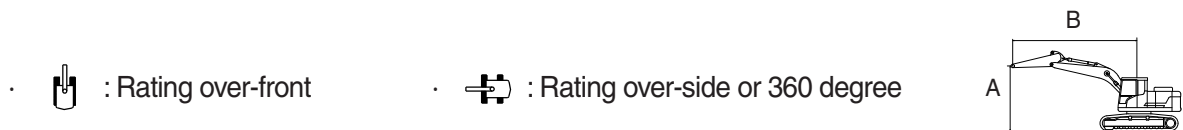

The difference between the weight of a work tool attachment must be subtracted.

Consult with your local HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause serious injury, death, or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX400LT3	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		6500	2550	6200	600	-	-	-	-	-



Lift-point height (A)		Lift-point radius (B)								At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
												m (ft)
9.0 m (29.5 ft)	kg lb									*10560 *23280	*10560 *23280	5.83 (19.1)
7.5 m (24.6 ft)	kg lb					*9940 *21910	*9940 *21910			*9950 *21940	7930 17480	7.25 (23.8)
6.0 m (19.7 ft)	kg lb					*10710 *23610	*10710 *23610	*9850 *21720	7440 16400	*9780 *21560	6400 14110	8.16 (26.8)
4.5 m (14.8 ft)	kg lb			*16000 *35270	15740 34700	*12200 *26900	10160 22400	*10450 *23040	7200 15870	9220 20330	5610 12370	8.71 (28.6)
3.0 m (9.8 ft)	kg lb					*13890 *30620	9520 20990	*11280 *24870	6890 15190	8640 19050	5220 11510	8.98 (29.5)
1.5 m (4.9 ft)	kg lb					*15180 *33470	9040 19930	11180 24650	6620 14590	8510 18760	5100 11240	8.99 (29.5)
0.0 m (0.0 ft)	kg lb			*14960 *32980	13450 29650	15550 34280	8800 19400	11000 24250	6460 14240	8810 19420	5260 11600	8.73 (28.7)
-1.5 m (-4.9 ft)	kg lb			*20160 *44450	13530 29830	*15340 *33820	8760 19310	10980 24210	6440 14200	9690 21360	5750 12680	8.2 (26.9)
-3.0 m (-9.8 ft)	kg lb	*22990 *50680	*22990 *50680	*18020 *39730	13790 30400	*13890 *30620	8920 19670			*10660 *23500	6860 15120	7.31 (24.0)
-4.5 m (-14.8 ft)	kg lb			*13990 *30840	*13990 *30840					*10120 *22310	9610 21190	5.92 (19.4)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.


Lifting capacities will vary with different work tools, ground conditions and attachments.













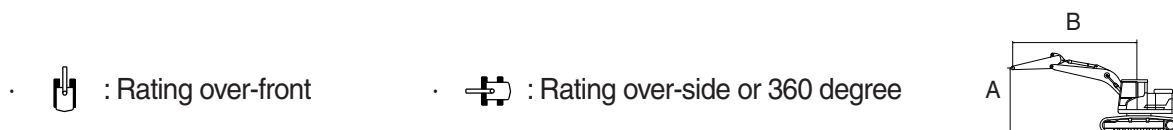The difference between the weight of a work tool attachment must be subtracted.

Consult with your local HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause serious injury, death, or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX400LT3	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		6500	2800	6200	600	-	-	-	-	-



Lift-point height (A)		Lift-point radius (B)										At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity		Reach
														m (ft)
9.0 m (29.5 ft)	kg lb					*9920 *21870	*9920 *21870					*10030 *22110	*10030 *22110	6.18 (20.3)
7.5 m (24.6 ft)	kg lb							*9520 *20990	7560 16670			*9240 *20370	7470 16470	7.54 (24.8)
6.0 m (19.7 ft)	kg lb					*10320 *22750	*10320 *22750	*9520 *20990	7500 16530			*8880 *19580	6100 13450	8.42 (27.6)
4.5 m (14.8 ft)	kg lb			*15300 *33730	*15300 *33730	*11830 *26080	10240 22580	*10190 *22470	7240 15960			8840 19490	5380 11860	8.96 (29.4)
3.0 m (9.8 ft)	kg lb					*13580 *29940	9590 21140	*11070 *24410	6910 15230	8630 19030	5210 11490	8310 18320	5010 11050	9.22 (30.2)
1.5 m (4.9 ft)	kg lb					*14980 *33030	9080 20020	11200 24690	6630 14620	8490 18720	5080 11200	8180 18030	4900 10800	9.22 (30.3)
0.0 m (0.0 ft)	kg lb			*15760 *34740	13420 29590	15550 34280	8790 19380	10990 24230	6440 14200			8450 18630	5040 11110	8.98 (29.4)
-1.5 m (-4.9 ft)	kg lb	*10800 *23810	*10800 *23810	*20480 *45150	13460 29670	*15440 *34040	8720 19220	10930 24100	6400 14110			9220 20330	5480 12080	8.45 (27.7)
-3.0 m (-9.8 ft)	kg lb	*21330 *47020	*21330 *47020	*18540 *40870	13690 30180	*14200 *31310	8850 19510	*10690 *23570	6550 14440			*10420 *22970	6450 14220	7.6 (24.9)
-4.5 m (-14.8 ft)	kg lb			*14890 *32830	14170 31240	*10950 *24140	9250 20390					*10090 *22240	8740 19270	6.27 (20.6)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.


Lifting capacities will vary with different work tools, ground conditions and attachments.













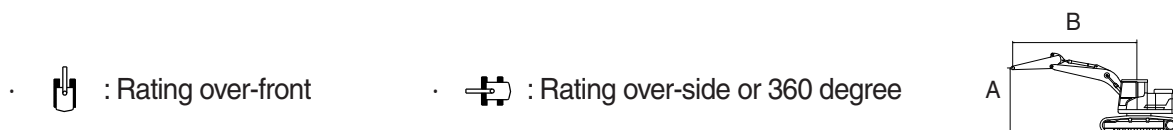The difference between the weight of a work tool attachment must be subtracted.

Consult with your local HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause serious injury, death, or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX400LT3	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		6500	3200	6200	600	-	-	-	-	-



Lift-point height (A)		Lift-point radius (B)										At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity		Reach
														m (ft)
9.0 m (29.5 ft)	kg lb											*8330 *18360	*8330 *18360	6.52 (21.4)
7.5 m (24.6 ft)	kg lb							*8790 *19380	7710 17000			*7740 *17060	7130 15720	7.82 (25.7)
6.0 m (19.7 ft)	kg lb					*9680 *21340	*9680 *21340	*9010 *19860	7590 16730			*7570 *16690	5870 12940	8.67 (28.4)
4.5 m (14.8 ft)	kg lb			*14200 *31310	*14200 *31310	*11230 *24760	10380 22880	*9750 *21500	7310 16120	8830 19470	5390 11880	*7670 *16910	5190 11440	9.19 (30.2)
3.0 m (9.8 ft)	kg lb			*18040 *39770	14800 32630	*13050 *28770	9710 21410	*10700 *23590	6960 15340	8660 19090	5230 11530	8010 17660	4830 10650	9.44 (31.0)
1.5 m (4.9 ft)	kg lb			*18170 *40060	13780 30380	*14600 *32190	9140 20150	11220 24740	6650 14660	8480 18700	5070 11180	7870 17350	4710 10380	9.45 (31.0)
0.0 m (0.0 ft)	kg lb			*19360 *42680	13400 29540	*15470 *34110	8790 19380	10970 24180	6430 14180	8370 18450	4970 10960	8090 17840	4810 10600	9.21 (30.2)
-1.5 m (-4.9 ft)	kg lb	*12640 *27870	*12640 *27870	*20840 *45940	13360 29450	15410 33970	8670 19110	10870 23960	6340 13980			8770 19330	5190 11440	8.70 (28.5)
-3.0 m (-9.8 ft)	kg lb	*20920 *46120	*20920 *46120	*19230 *42390	13530 29830	*14600 *32190	8740 19270	10960 24160	6410 14130			10230 22550	6030 13290	7.87 (25.8)
-4.5 m (-14.8 ft)	kg lb	*21490 *47380	*21490 *47380	*16120 *35540	13950 30750	*12130 *26740	9040 19930					*10550 *23260	7940 17500	6.60 (21.7)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.


Lifting capacities will vary with different work tools, ground conditions and attachments.









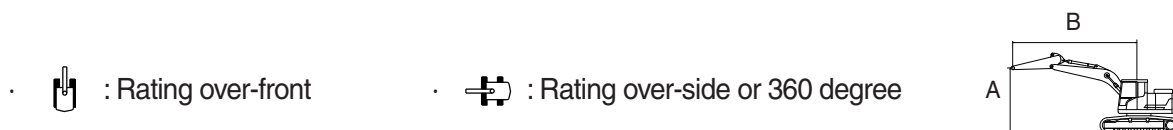





The difference between the weight of a work tool attachment must be subtracted.

Consult with your local HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause serious injury, death, or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX400LT3	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		6500	3900	6200	600	-	-	-	-	-



Lift-point height (A)		Lift-point radius (B)												At max. reach		
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity		Reach
																m (ft)
9.0 m (29.5 ft)	kg lb													*6170 *13600	*6170 *13600	7.44 (24.4)
7.5 m (24.6 ft)	kg lb									*7750 *17090	*7750 *17090			*5790 *12760	*5790 *12760	8.60 (28.2)
6.0 m (19.7 ft)	kg lb									*8140 *17950	7780 17150	*7110 *15670	5640 12430	*5670 *12500	5210 11490	9.38 (30.8)
4.5 m (14.8 ft)	kg lb							*10130 *22330	*10130 *22330	*8980 *19800	7470 16470	*8340 *18390	5500 12130	*5740 *12650	4660 10270	9.86 (32.4)
3.0 m (9.8 ft)	kg lb					*16220 *35760	15440 34040	*12080 *26630	9970 21980	*10040 *22130	7090 15630	8750 19290	5310 11710	*5970 *13160	4360 9610	10.10 (33.1)
1.5 m (4.9 ft)	kg lb					*19460 *42900	14160 31220	*13870 *30580	9320 20550	*11070 *24410	6730 14840	8530 18810	5110 11270	*6390 *14090	4250 9370	10.10 (33.1)
0.0 m (0.0 ft)	kg lb			*7130 *15720	*7130 *15720	*20850 *45970	13500 29760	*15090 *33270	8870 19550	11010 24270	6450 14220	8350 18410	4950 10910	*7080 *15610	4310 9500	9.88 (32.4)
-1.5 m (-4.9 ft)	kg lb	*7910 *17440	*7910 *17440	*11810 *26040	*11810 *26040	*21200 *46740	13280 29280	15400 33950	8640 19050	10840 23900	6300 13890	8270 18230	4880 10760	7770 17130	4590 10120	9.41 (30.9)
-3.0 m (-9.8 ft)	kg lb	*12870 *28370	*12870 *28370	*17720 *39070	*17720 *39070	*20200 *44530	13340 29410	*15100 *33290	8620 19000	10830 23880	6290 13870			8810 19420	5200 11460	8.65 (28.4)
-4.5 m (-14.8 ft)	kg lb			*24910 *54920	*24910 *54920	*17880 *39420	13640 30070	*13490 *29740	8800 19400	*10030 *22110	6480 14290			*9990 *22020	6470 14260	7.52 (24.7)
-6.0 m (-19.7 ft)	kg lb					*13310 *29340	*13310 *29340							*9880 *21780	9810 21630	5.78 (19.0)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.


Lifting capacities will vary with different work tools, ground conditions and attachments.









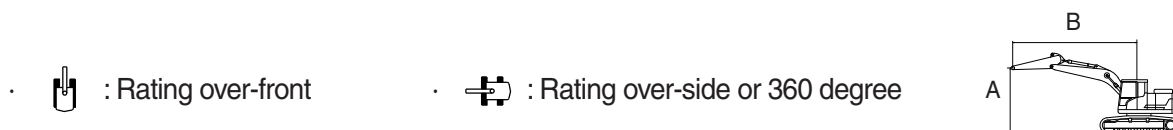

The difference between the weight of a work tool attachment must be subtracted.

Consult with your local HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause serious injury, death, or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX400 NLT3	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		6150	2550	7000	600	-	-	-	-	-



Lift-point height (A)		Lift-point radius (B)								At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
												m (ft)
7.5 m (24.6 ft)	kg lb					*10350 *22820	10180 22440			*10350 *22820	8230 18140	6.77 (22.2)
6.0 m (19.7 ft)	kg lb					*10870 *23960	9940 21910	*10290 *22690	6880 15170	*9880 *21780	6500 14330	7.74 (25.4)
4.5 m (14.8 ft)	kg lb			*15550 *34280	14560 32100	*12260 *27030	9460 20860	*10730 *23660	6710 14790	*9870 *21760	5640 12430	8.32 (27.3)
3.0 m (9.8 ft)	kg lb			*19270 *42480	13260 29230	*13940 *30730	8890 19600	*11500 *25350	6440 14200	9780 21560	5220 11510	8.60 (28.2)
1.5 m (4.9 ft)	kg lb			*17690 *39000	12490 27540	*15310 *33750	8430 18580	11870 26170	6200 13670	9640 21250	5090 11220	8.61 (28.2)
0.0 m (0.0 ft)	kg lb			*21680 *47800	12260 27030	*15910 *35080	8180 18030	11700 25790	6050 13340	10020 22090	5250 11570	8.34 (27.4)
-1.5 m (-4.9 ft)	kg lb	*14680 *32360	*14680 *32360	*20660 *45550	12310 27140	*15560 *34300	8140 17950	11700 25790	6050 13340	11120 24520	5790 12760	7.78 (25.5)
-3.0 m (-9.8 ft)	kg lb	*24210 *53370	*24210 *53370	*18310 *40370	12560 27690	*13840 *30510	8300 18300			*11480 *25310	7030 15500	6.83 (22.4)
-4.5 m (-14.8 ft)	kg lb			*13400 *29540	13120 28920					*10800 *23810	10390 22910	5.31 (17.4)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.


Lifting capacities will vary with different work tools, ground conditions and attachments.









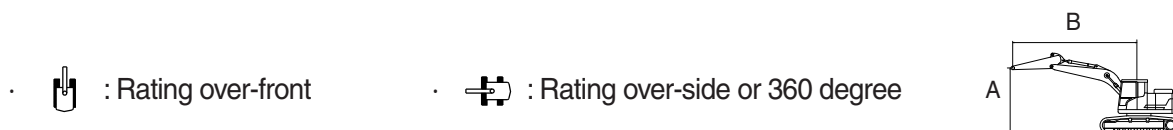

The difference between the weight of a work tool attachment must be subtracted.

Consult with your local HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause serious injury, death, or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX400 NLT3	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		6500	2550	7000	600	-	-	-	-	-



Lift-point height (A)		Lift-point radius (B)								At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
												m (ft)
9.0 m (29.5 ft)	kg lb									*10560 *23280	10560 23280	5.83 (19.1)
7.5 m (24.6 ft)	kg lb					*9940 *21910	*9940 *21910			*9950 *21940	7300 16090	7.25 (23.8)
6.0 m (19.7 ft)	kg lb					*10710 *23610	9830 21670	*9850 *21720	6850 15100	*9780 *21560	5890 12990	8.16 (26.8)
4.5 m (14.8 ft)	kg lb			*16000 *35270	14130 31150	*12200 *26900	9270 20440	*10450 *23040	6610 14570	9650 21270	5160 11380	8.71 (28.6)
3.0 m (9.8 ft)	kg lb					*13890 *30620	8660 19090	*11280 *24870	6310 13910	9060 19970	4790 10560	8.98 (29.5)
1.5 m (4.9 ft)	kg lb					*15180 *33470	8200 18080	11710 25820	6050 13340	8930 19690	4680 10320	8.99 (29.5)
0.0 m (0.0 ft)	kg lb			*14960 *32980	11970 26390	*15700 *34610	7960 17550	11530 25420	5890 12990	9240 20370	4810 10600	8.73 (28.7)
-1.5 m (-4.9 ft)	kg lb			*20160 *44450	12040 26540	*15340 *33820	7930 17480	11510 25380	5870 12940	10150 22380	5260 11600	8.20 (26.9)
-3.0 m (-9.8 ft)	kg lb	*22990 *50680	*22990 *50680	*18020 *39730	12290 27090	*13890 *30620	8080 17810			*10660 *23500	6260 13800	7.31 (24.0)
-4.5 m (-14.8 ft)	kg lb			*13990 *30840	12800 28220					*10120 *22310	8720 19220	5.92 (19.4)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.


Lifting capacities will vary with different work tools, ground conditions and attachments.













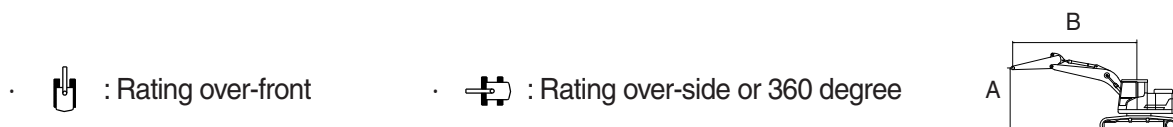The difference between the weight of a work tool attachment must be subtracted.

Consult with your local HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause serious injury, death, or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX400 NLT3	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		6500	2800	7000	600	-	-	-	-	-



Lift-point height (A)		Lift-point radius (B)										At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity		Reach
														m (ft)
9.0 m (29.5 ft)	kg lb					*9920 *21870	*9920 *21870					*10030 *22110	9630 21230	6.18 (20.3)
7.5 m (24.6 ft)	kg lb							*9520 *20990	6960 15340			*9240 *20370	6880 15170	7.54 (24.8)
6.0 m (19.7 ft)	kg lb					*10320 *22750	9910 21850	*9520 *20990	6900 15210			*8880 *19580	5620 12390	8.42 (27.6)
4.5 m (14.8 ft)	kg lb			*15300 *33730	14350 31640	*11830 *26080	9350 20610	*10190 *22470	6650 14660			*8860 *19530	4940 10890	8.96 (29.4)
3.0 m (9.8 ft)	kg lb					*13580 *29940	8720 19220	*11070 *24410	6330 13960	9040 19930	4780 10540	8710 19200	4600 10140	9.22 (30.2)
1.5 m (4.9 ft)	kg lb					*14980 *33030	8230 18140	11720 25840	6050 13340	8900 19620	4660 10270	8580 18920	4490 9900	9.22 (30.3)
0.0 m (0.0 ft)	kg lb			*15760 *34740	11940 26320	*15630 *34460	7960 17550	11520 25400	5870 12940			8860 19530	4610 10160	8.98 (29.4)
-1.5 m (-4.9 ft)	kg lb	*10800 *23810	*10800 *23810	*20480 *45150	11980 26410	*15440 *34040	7890 17390	11460 25260	5830 12850			9670 21320	5010 11050	8.45 (27.7)
-3.0 m (-9.8 ft)	kg lb	*21330 *47020	*21330 *47020	*18540 *40870	12190 26870	*14200 *31310	8010 17660	*10690 *23570	5980 13180			*10420 *22970	5890 12990	7.60 (24.9)
-4.5 m (-14.8 ft)	kg lb			*14890 *32830	12650 27890	*10950 *24140	8400 18520					*10090 *22240	7950 17530	6.27 (20.6)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.


Lifting capacities will vary with different work tools, ground conditions and attachments.













The difference between the weight of a work tool attachment must be subtracted.

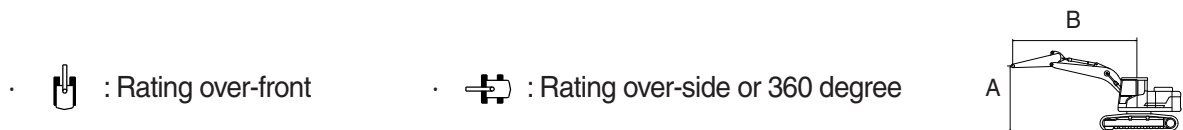Consult with your local HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause serious injury, death, or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX400 NLT3	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		6500	3200	7000	600	-	-	-	-	-



Lift-point height (A)		Lift-point radius (B)										At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity		Reach
														m (ft)
9.0 m (29.5 ft)	kg lb											*8330 *18360	*8330 *18360	6.52 (21.4)
7.5 m (24.6 ft)	kg lb							*8790 *19380	7100 15650			*7740 *17060	6570 14480	7.82 (25.7)
6.0 m (19.7 ft)	kg lb					*9680 *21340	*9680 *21340	*9010 *19860	6990 15410			*7570 *16690	5410 11930	8.67 (28.4)
4.5 m (14.8 ft)	kg lb			*14200 *31310	*14200 *31310	*11230 *24760	9480 20900	*9750 *21500	6710 14790	*8980 *19800	4950 10910	*7670 *16910	4770 10520	9.19 (30.2)
3.0 m (9.8 ft)	kg lb			*18040 *39770	13240 29190	*13050 *28770	8830 19470	*10700 *23590	6380 14070	9070 20000	4800 10580	*8020 *17680	4430 9770	9.44 (31.0)
1.5 m (4.9 ft)	kg lb			*18170 *40060	12280 27070	*14600 *32190	8280 18250	*11580 *25530	6070 13380	8900 19620	4650 10250	8260 18210	4310 9500	9.45 (31.0)
0.0 m (0.0 ft)	kg lb			*19360 *42680	11910 26260	*15470 *34110	7950 17530	11500 25350	5860 12920	8780 19360	4540 10010	8490 18720	4400 9700	9.21 (30.2)
-1.5 m (-4.9 ft)	kg lb	*12640 *27870	*12640 *27870	*20840 *45940	11870 26170	*15510 *34190	7830 17260	11400 25130	5770 12720			9200 20280	4740 10450	8.70 (28.5)
-3.0 m (-9.8 ft)	kg lb	*20920 *46120	*20920 *46120	*19230 *42390	12040 26540	*14600 *32190	7900 17420	*11250 *24800	5840 12870			*10440 *23020	5500 12130	7.87 (25.8)
-4.5 m (-14.8 ft)	kg lb	*21490 *47380	*21490 *47380	*16120 *35540	12430 27400	*12130 *26740	8190 18060					*10550 *23260	7230 15940	6.60 (21.7)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.


Lifting capacities will vary with different work tools, ground conditions and attachments.









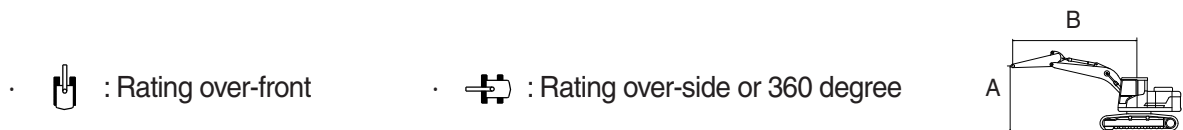





The difference between the weight of a work tool attachment must be subtracted.

Consult with your local HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause serious injury, death, or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

Model	Type	Boom	Arm	Counterweight	Shoe	Wheel	Dozer		Outrigger	
HX400 NLT3	MONO BOOM	Length [mm]	Length [mm]	weight [kg]	width [mm]	width [mm]	Front	Rear	Front	Rear
		6500	3900	7000	600	-	-	-	-	-



Lift-point height (A)		Lift-point radius (B)												At max. reach		
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity		Reach
																m (ft)
9.0 m (29.5 ft)	kg lb													*6170 *13600	*6170 *13600	7.44 (24.4)
7.5 m (24.6 ft)	kg lb									*7750 *17090	7330 16160			*5790 *12760	5680 12520	8.60 (28.2)
6.0 m (19.7 ft)	kg lb									*8140 *17950	7170 15810	*7110 *15670	5190 11440	*5670 *12500	4790 10560	9.38 (30.8)
4.5 m (14.8 ft)	kg lb							*10130 *22330	9780 21560	*8980 *19800	6870 15150	*8340 *18390	5060 11160	*5740 *12650	4280 9440	9.86 (32.4)
3.0 m (9.8 ft)	kg lb					*16220 *35760	13840 30510	*12080 *26630	9090 20040	*10040 *22130	6500 14330	*8890 *19600	4870 10740	*5970 *13160	4000 8820	10.10 (33.1)
1.5 m (4.9 ft)	kg lb					*19460 *42900	12630 27840	*13870 *30580	8460 18650	*11070 *24410	6150 13560	8940 19710	4680 10320	*6390 *14090	3890 8580	10.10 (33.1)
0.0 m (0.0 ft)	kg lb			*7130 *15720	*7130 *15720	*20850 *45970	12000 26460	*15090 *33270	8020 17680	11540 25440	5880 12960	8770 19330	4520 9960	*7080 *15610	3940 8690	9.88 (32.4)
-1.5 m (-4.9 ft)	kg lb	*7910 *17440	*7910 *17440	*11810 *26040	*11810 *26040	*21200 *46740	11800 26010	*15530 *34240	7800 17200	11370 25070	5730 12630	8690 19160	4450 9810	8160 17990	4190 9240	9.41 (30.9)
-3.0 m (-9.8 ft)	kg lb	*12870 *28370	*12870 *28370	*17720 *39070	*17720 *39070	*20200 *44530	11860 26150	*15100 *33290	7780 17150	11360 25040	5720 12610			9250 20390	4740 10450	8.65 (28.4)
-4.5 m (-14.8 ft)	kg lb			*24910 *54920	24030 52980	*17880 *39420	12140 26760	*13490 *29740	7960 17550	*10030 *22110	5910 13030			*9990 *22020	5890 12990	7.52 (24.7)
-6.0 m (-19.7 ft)	kg lb					*13310 *29340	12720 28040							*9880 *21780	8890 19600	5.78 (19.0)

Note 1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4. *Indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.

Lifting capacities will vary with different work tools, ground conditions and attachments.

The difference between the weight of a work tool attachment must be subtracted.

Consult with your local HD Hyundai Construction Equipment dealer regarding the lifting capacities for specific work tools and attachments.

▲ Failure to comply to the rated load can cause serious injury, death, or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

6. BUCKET SELECTION GUIDE

1) HX400 LT3

(1) 6200 kg counterweight



General bucket



Heavy duty
(with side cutter)



Rock heavy duty

Type	Capacity		Width	Weight	Tooth	MONO				
	SAE Heaped	CECE heaped	w/o side cutter			Recommendation mm (ft-in)				
						6.15 m (20' 2")	6.50 m (21' 4")			
							2.55 m (8' 4")	2.55 m (8' 4")	2.80 m (9' 2")	3.20 m (10' 6")
General bucket	1.46 (1.91)	1.28 (1.67)	1305 (51)	1400 (3,090)	4	●	●	●	●	◐
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1500 (3,310)	5	●	●	●	◐	■
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1610 (3,550)	5	●	◐	◐	■	▲
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1690 (3,730)	5	◐	■	■	■	▲
	2.32 (3.03)	2.02 (2.64)	1885 (74)	1800 (3,970)	6	■	■	▲	▲	X
Heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1560 (3,440)	4	●	●	●	●	◐
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1660 (3,660)	5	●	●	●	◐	■
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1790 (3,950)	5	●	◐	■	■	▲
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1880 (4,140)	5	◐	■	■	■	▲
	2.5 (3.27)	2.22 (2.90)	1750 (69)	2020 (4,450)	5	■	▲	▲	▲	X
Rock heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1750 (3,860)	4	●	●	●	●	—
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1850 (4,080)	5	●	●	◐	◐	—
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1990 (4,390)	5	◐	◐	■	■	—
	2.1 (2.75)	1.84 (2.41)	1735 (68)	2090 (4,610)	5	◐	■	■	▲	—

●	Applicable for materials with density of 2100 kg/m ³ (3500 lb/yd ³) or less
●	Applicable for materials with density of 1800 kg/m ³ (3000 lb/yd ³) or less
■	Applicable for materials with density of 1500 kg/m ³ (2500 lb/yd ³) or less
▲	Applicable for materials with density of 1200 kg/m ³ (2000 lb/yd ³) or less
X	Not recommended
-	Not available

※ These recommendations are for general conditions and average use.

Work tools and ground conditions have effects on machine performance.


Select an optimum combination according to the working conditions and the type of work that is being done.

Consult with your local HD Hyundai Construction Equipment dealer for information on selecting the correct boom—arm—bucket combination.

(2) 7000 kg counterweight



General bucket



Heavy duty
(with side cutter)



Rock heavy duty

Type	Capacity		Width	Weight	Tooth	MONO				
	SAE Heaped	CECE heaped	w/o side cutter			Recommendation mm (ft-in)				
						6.15 m (20' 2")	6.50 m (21' 4")			
							2.55 m (8' 4")	2.55 m (8' 4")	2.80 m (9' 2")	3.20 m (10' 6")
General bucket	1.46 (1.91)	1.28 (1.67)	1305 (51)	1400 (3,090)	4	●	●	●	●	●
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1500 (3,310)	5	●	●	●	●	◐
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1610 (3,550)	5	●	●	◐	◐	■
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1690 (3,730)	5	●	◐	■	■	▲
	2.32 (3.03)	2.02 (2.64)	1885 (74)	1800 (3,970)	6	◐	■	■	■	▲
Heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1560 (3,440)	4	●	●	●	●	●
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1660 (3,660)	5	●	●	●	●	◐
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1790 (3,950)	5	●	◐	◐	◐	■
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1880 (4,140)	5	◐	◐	■	■	▲
	2.5 (3.27)	2.22 (2.90)	1750 (69)	2020 (4,450)	5	■	■	▲	▲	X
Rock heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1750 (3,860)	4	●	●	●	●	—
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1850 (4,080)	5	●	●	●	●	—
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1990 (4,390)	5	●	◐	◐	■	—
	2.1 (2.75)	1.84 (2.41)	1735 (68)	2090 (4,610)	5	◐	■	■	■	—

●	Applicable for materials with density of 2100 kg/m ³ (3500 lb/yd ³) or less
◐	Applicable for materials with density of 1800 kg/m ³ (3000 lb/yd ³) or less
■	Applicable for materials with density of 1500 kg/m ³ (2500 lb/yd ³) or less
▲	Applicable for materials with density of 1200 kg/m ³ (2000 lb/yd ³) or less
X	Not recommended
—	Not available

※ These recommendations are for general conditions and average use.

Work tools and ground conditions have effects on machine performance.

Select an optimum combination according to the working conditions and the type of work that is being done.

Consult with your local HD Hyundai Construction Equipment dealer for information on selecting the correct boom—arm—bucket combination.

(3) 7500 kg counterweight



General bucket



Heavy duty
(with side cutter)



Rock heavy duty

Type	Capacity		Width	Weight	Tooth	MONO				
	SAE Heaped	CECE heaped	w/o side cutter			Recommendation mm (ft-in)				
						6.15 m (20' 2")	6.50 m (21' 4")			
							2.55 m (8' 4")	2.55 m (8' 4")	2.80 m (9' 2")	3.20 m (10' 6")
General bucket	1.46 (1.91)	1.28 (1.67)	1305 (51)	1400 (3,090)	4	●	●	●	●	●
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1500 (3,310)	5	●	●	●	●	◐
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1610 (3,550)	5	●	●	●	◐	■
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1690 (3,730)	5	●	◐	◐	◐	■
	2.32 (3.03)	2.02 (2.64)	1885 (74)	1800 (3,970)	6	◐	■	■	■	▲
Heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1560 (3,440)	4	●	●	●	●	●
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1660 (3,660)	5	●	●	●	●	◐
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1790 (3,950)	5	●	●	◐	◐	■
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1880 (4,140)	5	●	◐	◐	■	▲
	2.5 (3.27)	2.22 (2.90)	1750 (69)	2020 (4,450)	5	■	■	▲	▲	▲
Rock heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1750 (3,860)	4	●	●	●	●	—
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1850 (4,080)	5	●	●	●	●	—
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1990 (4,390)	5	●	◐	◐	◐	—
	2.1 (2.75)	1.84 (2.41)	1735 (68)	2090 (4,610)	5	◐	◐	■	■	—

●	Applicable for materials with density of 2100 kg/m ³ (3500 lb/yd ³) or less
●	Applicable for materials with density of 1800 kg/m ³ (3000 lb/yd ³) or less
■	Applicable for materials with density of 1500 kg/m ³ (2500 lb/yd ³) or less
▲	Applicable for materials with density of 1200 kg/m ³ (2000 lb/yd ³) or less
X	Not recommended
-	Not available

※ These recommendations are for general conditions and average use.

Work tools and ground conditions have effects on machine performance.


Select an optimum combination according to the working conditions and the type of work that is being done.

Consult with your local HD Hyundai Construction Equipment dealer for information on selecting the correct boom—arm—bucket combination.

(4) 8100 kg counterweight



General bucket



Heavy duty
(with side cutter)



Rock heavy duty

Type	Capacity		Width	Weight	Tooth	MONO				
	SAE Heaped	CECE heaped	w/o side cutter			Recommendation mm (ft-in)				
						6.15 m (20' 2")	6.50 m (21' 4")			
							2.55 m (8' 4")	2.55 m (8' 4")	2.80 m (9' 2")	3.20 m (10' 6")
General bucket	1.46 (1.91)	1.28 (1.67)	1305 (51)	1400 (3,090)	4	●	●	●	●	●
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1500 (3,310)	5	●	●	●	●	●
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1610 (3,550)	5	●	●	●	●	◐
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1690 (3,730)	5	●	●	◐	◐	■
	2.32 (3.03)	2.02 (2.64)	1885 (74)	1800 (3,970)	6	◐	◐	■	■	▲
Heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1560 (3,440)	4	●	●	●	●	●
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1660 (3,660)	5	●	●	●	●	●
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1790 (3,950)	5	●	●	●	◐	■
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1880 (4,140)	5	●	◐	◐	◐	■
	2.5 (3.27)	2.22 (2.90)	1750 (69)	2020 (4,450)	5	◐	■	■	■	▲
Rock heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1750 (3,860)	4	●	●	●	●	—
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1850 (4,080)	5	●	●	●	●	—
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1990 (4,390)	5	●	●	●	◐	—
	2.1 (2.75)	1.84 (2.41)	1735 (68)	2090 (4,610)	5	●	◐	◐	■	—

●	Applicable for materials with density of 2100 kg/m ³ (3500 lb/yd ³) or less
◐	Applicable for materials with density of 1800 kg/m ³ (3000 lb/yd ³) or less
■	Applicable for materials with density of 1500 kg/m ³ (2500 lb/yd ³) or less
▲	Applicable for materials with density of 1200 kg/m ³ (2000 lb/yd ³) or less
X	Not recommended
-	Not available

※ These recommendations are for general conditions and average use.

Work tools and ground conditions have effects on machine performance.

Select an optimum combination according to the working conditions and the type of work that is being done.

Consult with your local HD Hyundai Construction Equipment dealer for information on selecting the correct boom—arm—bucket combination.

2) HX400 NLT3

(1) 7000 kg counterweight



General bucket



Heavy duty
(with side cutter)



Rock heavy duty

Type	Capacity		Width	Weight	Tooth	MONO				
	SAE Heaped	CECE heaped	w/o side cutter			Recommendation mm (ft-in)				
						6.15 m (20' 2")	6.50 m (21' 4")			
							2.55 m (8' 4")	2.55 m (8' 4")	2.80 m (9' 2")	3.20 m (10' 6")
General bucket	1.46 (1.91)	1.28 (1.67)	1305 (51)	1400 (3,090)	4	●	●	●	●	◐
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1500 (3,310)	5	●	◐	◐	◐	■
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1610 (3,550)	5	◐	■	■	■	▲
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1690 (3,730)	5	■	■	▲	▲	X
	2.32 (3.03)	2.02 (2.64)	1885 (74)	1800 (3,970)	6	■	▲	▲	▲	X
Heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1560 (3,440)	4	●	●	●	◐	■
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1660 (3,660)	5	●	◐	◐	◐	■
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1790 (3,950)	5	◐	■	■	▲	▲
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1880 (4,140)	5	■	▲	▲	▲	X
	2.5 (3.27)	2.22 (2.90)	1750 (69)	2020 (4,450)	5	▲	▲	X	X	X
Rock heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1750 (3,860)	4	●	●	◐	◐	—
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1850 (4,080)	5	●	◐	◐	■	—
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1990 (4,390)	5	◐	■	■	▲	—
	2.1 (2.75)	1.84 (2.41)	1735 (68)	2090 (4,610)	5	■	▲	▲	▲	—

●	Applicable for materials with density of 2100 kg/m ³ (3500 lb/yd ³) or less
◐	Applicable for materials with density of 1800 kg/m ³ (3000 lb/yd ³) or less
■	Applicable for materials with density of 1500 kg/m ³ (2500 lb/yd ³) or less
▲	Applicable for materials with density of 1200 kg/m ³ (2000 lb/yd ³) or less
X	Not recommended
—	Not available

※ These recommendations are for general conditions and average use.

Work tools and ground conditions have effects on machine performance.

Select an optimum combination according to the working conditions and the type of work that is being done.

Consult with your local HD Hyundai Construction Equipment dealer for information on selecting the correct boom—arm—bucket combination.

(2) 7500 kg counterweight



General bucket



Heavy duty
(with side cutter)



Rock heavy duty

Type	Capacity		Width	Weight	Tooth	MONO				
	SAE Heaped	CECE heaped	w/o side cutter			Recommendation		mm (ft-in)		
						6.15 m (20' 2")	6.50 m (21' 4")			
						2.55 m (8' 4")	2.55 m (8' 4")	2.80 m (9' 2")	3.20 m (10' 6")	3.90 m (12' 10")
m³ (yd³)	m³ (yd³)	mm (in)	kg (lb)	EA						
General bucket	1.46 (1.91)	1.28 (1.67)	1305 (51)	1400 (3,090)	4	●	●	●	●	◐
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1500 (3,310)	5	●	●	◐	◐	■
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1610 (3,550)	5	◐	◐	■	■	▲
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1690 (3,730)	5	◐	■	■	▲	▲
	2.32 (3.03)	2.02 (2.64)	1885 (74)	1800 (3,970)	6	■	▲	▲	▲	X
Heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1560 (3,440)	4	●	●	●	●	◐
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1660 (3,660)	5	●	●	◐	◐	■
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1790 (3,950)	5	◐	■	■	■	▲
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1880 (4,140)	5	■	■	▲	▲	X
	2.5 (3.27)	2.22 (2.90)	1750 (69)	2020 (4,450)	5	▲	▲	▲	X	X
Rock heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1750 (3,860)	4	●	●	●	◐	—
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1850 (4,080)	5	●	◐	◐	◐	—
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1990 (4,390)	5	◐	■	■	■	—
	2.1 (2.75)	1.84 (2.41)	1735 (68)	2090 (4,610)	5	■	■	▲	▲	—

●	Applicable for materials with density of 2100 kg/m ³ (3500 lb/yd ³) or less
●	Applicable for materials with density of 1800 kg/m ³ (3000 lb/yd ³) or less
■	Applicable for materials with density of 1500 kg/m ³ (2500 lb/yd ³) or less
▲	Applicable for materials with density of 1200 kg/m ³ (2000 lb/yd ³) or less
X	Not recommended
-	Not available

※ These recommendations are for general conditions and average use.

Work tools and ground conditions have effects on machine performance.


Select an optimum combination according to the working conditions and the type of work that is being done.

Consult with your local HD Hyundai Construction Equipment dealer for information on selecting the correct boom—arm—bucket combination.

(3) 8100 kg counterweight



General bucket



Heavy duty
(with side cutter)



Rock heavy duty

Type	Capacity		Width	Weight	Tooth	MONO				
	SAE Heaped	CECE heaped	w/o side cutter			Recommendation mm (ft-in)				
						6.15 m (20' 2")	6.50 m (21' 4")			
							2.55 m (8' 4")	2.55 m (8' 4")	2.80 m (9' 2")	3.20 m (10' 6")
General bucket	1.46 (1.91)	1.28 (1.67)	1305 (51)	1400 (3,090)	4	●	●	●	●	◐
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1500 (3,310)	5	●	●	●	●	◐
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1610 (3,550)	5	●	◐	◐	■	■
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1690 (3,730)	5	◐	■	■	■	▲
	2.32 (3.03)	2.02 (2.64)	1885 (74)	1800 (3,970)	6	■	■	▲	▲	X
Heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1560 (3,440)	4	●	●	●	●	◐
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1660 (3,660)	5	●	●	●	◐	■
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1790 (3,950)	5	●	◐	■	■	▲
	2.1 (2.75)	1.84 (2.41)	1735 (68)	1880 (4,140)	5	◐	■	■	■	▲
	2.5 (3.27)	2.22 (2.90)	1750 (69)	2020 (4,450)	5	■	▲	▲	▲	X
Rock heavy duty	1.46 (1.91)	1.28 (1.67)	1305 (51)	1750 (3,860)	4	●	●	●	●	—
	1.62 (2.12)	1.42 (1.86)	1415 (56)	1850 (4,080)	5	●	●	◐	◐	—
	1.9 (2.49)	1.65 (2.16)	1600 (63)	1990 (4,390)	5	◐	◐	■	■	—
	2.1 (2.75)	1.84 (2.41)	1735 (68)	2090 (4,610)	5	◐	■	■	▲	—

●	Applicable for materials with density of 2100 kg/m ³ (3500 lb/yd ³) or less
●	Applicable for materials with density of 1800 kg/m ³ (3000 lb/yd ³) or less
■	Applicable for materials with density of 1500 kg/m ³ (2500 lb/yd ³) or less
▲	Applicable for materials with density of 1200 kg/m ³ (2000 lb/yd ³) or less
X	Not recommended
-	Not available

※ These recommendations are for general conditions and average use.

Work tools and ground conditions have effects on machine performance.

Select an optimum combination according to the working conditions and the type of work that is being done.

Consult with your local HD Hyundai Construction Equipment dealer for information on selecting the correct boom—arm—bucket combination.

7. UNDERCARRIAGE

1) TYPES OF SHOES

Model	Description	Unit		Triple grouser								Double grouser	
	width	mm	(in)	600	(24)	700	(28)	800	(32)	900	(36)	700	(28)
HX400 LT3	Operating weight	kg	(lb)	38420	84700	38870	85690	39320	86690	39780	87700	38360	84570
	Ground pressure	kgf/cm ²	(psi)	0.69	9.80	0.60	8.49	0.53	7.52	0.48	6.77	0.69	9.79
	Overall width	mm	(ft-in)	3180	(10' 5")	3180	(10' 5")	3180	(10' 5")	3180	(10' 5")	3180	(10' 5")
	Link quantity	EA		51		51		51		51		51	
HX400 T3	Operating weight	kg	(lb)	39510	87100	-	-	-	-	-	-	39450	86970
	Ground pressure	kgf/cm ²	(psi)	0.71	10.08	-	-	-	-	-	-	0.71	10.06
	Overall width	mm	(ft-in)	3180	(10' 5")	-	-	-	-	-	-	3180	(10' 5")
	Link quantity	EA		51		-		-		-		51	

2) SELECTION OF TRACK SHOE

Suitable track shoes should be selected according to operating conditions.

Method of selecting shoes

Confirm the category from the list of applications in **table 2**, then use **table 1** to select the shoe. Wide shoes (categories B and C) have limitations on applications. Before using wide shoes, check the precautions, then investigate and study the operating conditions to confirm if these shoes are suitable.

Select the narrowest shoe possible to meet the required flotation and ground pressure. Application of wider shoes than recommendations will cause unexpected problem such as bending of shoes, crack of link, breakage of pin, loosening of shoe bolts and the other various problems.

Table 1

Track shoe	Specification	Category
600 mm triple grouser	Standard	A
700 mm triple grouser	Option	B
800 mm triple grouser	Option	C
900 mm triple grouser	Option	C
600 mm double grouser	Option	C

Table 2

Category	Applications	Precautions
A	Rocky ground, river beds, normal soil	<ul style="list-style-type: none">· Travel at low speed on rough ground with large obstacles such as boulders or fallen trees or a wide range of general civil engineering work
B	Normal soil, soft ground	<ul style="list-style-type: none">· These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees· Travel at high speed only on flat ground· Travel slowly at low speed if it is impossible to avoid going over obstacles
C	Extremely soft ground (swampy ground)	<ul style="list-style-type: none">· Use the shoes only in the conditions that the machine sinks and it is impossible to use the shoes of category A or B· These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees· Travel at high speed only on flat ground· Travel slowly at low speed if it is impossible to avoid going over obstacles

8. SPECIFICATIONS FOR MAJOR COMPONENTS

1) ENGINE

Item	Specification
Maker / Model	HD Hyundai Construction Equipment / HE8.9
Type	4-cycle, turbocharged, charge air cooled, electronic controlled diesel engine
Cooling method	Water cooled
Number of cylinders and arrangement	6 cylinders, in-line
Firing order	1-5-3-6-2-4
Combustion chamber type	Direct injection type
Cylinder bore × stroke	114 × 145 mm (4.49" × 5.69")
Displacement	8.9 ℓ (543 cu in)
Compression ratio	17.8 : 1
Gross power	280 Hp (209 kW) at 2000 rpm
Net power	275 Hp (205 kW) at 2000 rpm
Max. power	310 Hp (231 kW) at 1700 rpm
Peak Torque	1451 N·m (1070 lbf·ft) at 1400 rpm
Engine oil quantity	30 ℓ (7.9 U.S. gal)
Wet weight	738 kg (1627 lb)
Starter motor	24 V-7.8 kW
Alternator	24 V-95 A

2) MAIN PUMP

Item	Specification
Type	Variable displacement tandem axis piston pumps
Capacity	2 × 185 cc/rev
Maximum pressure	350 kgf/cm ² (4980 psi)
Rated oil flow	2 × 315 ℓ/min (83.2 U.S. gpm / 69.3 U.K. gpm)

3) GEAR PUMP

Item	Specification
Type	Fixed displacement gear pump single stage
Capacity	15 cc/rev
Maximum pressure	40 kgf/cm ² (569 psi)
Rated oil flow	25.5 ℓ /min (6.7 U.S. gpm/5.6 U.K. gpm)

4) MAIN CONTROL VALVE

Item		Specification
Type		9 spools three-block
Operating method		Hydraulic pilot system
Main relief valve pressure		350 kgf/cm ² (4980 psi)
Port relief valve pressure	Boom	400 kgf/cm ² (5690 psi)
	Arm	400 kgf/cm ² (5690 psi)
	Bucket	400 kgf/cm ² (5690 psi)

5) SWING MOTOR

Item		Specification
Type		Two fixed displacement axial piston motor
Capacity		240 cc/rev
Relief pressure		290 kgf/cm² (4125 psi)
Braking system		Automatic, spring applied hydraulic released
Braking torque		137 kgf · m (991 lbf · ft) over
Brake release pressure	Cracking	9 kgf/cm² (128 psi)
	Full stroke	26 kgf/cm² (370 psi)
Reduction gear type		2 - stage planetary

6) TRAVEL MOTOR

Item	Specification
Type	Variable displacement axial piston motor
Capacity	185/114 cc/rev
Relief pressure	350 kgf/cm ² (4980 psi)
Braking system	Automatic, spring applied hydraulic released
Braking torque	57.1 kgf · m (413 lbf · ft)
Brake release pressure	10.6 kgf/cm ² (150 psi)
Reduction gear type	2-stage planetary

7) CYLINDER

Item		Specification
Boom cylinder	Bore dia × Stroke	Ø 160 × 1500 mm
	Cushion	Extend only
Arm cylinder	Bore dia × Stroke	Ø 170 × 1750 mm
	Cushion	Extend and retract
Bucket cylinder	Bore dia × Stroke	Ø 150 × 1285 mm
	Cushion	Extend only

※ Discoloration of cylinder rod can occur when the friction reduction additive of lubrication oil spreads on the rod surface.

※ Discoloration does not cause any harmful effect on the cylinder performance.

9. RECOMMENDED OILS

HD Hyundai Construction Equipment genuine lubricating oils have been developed to offer the best performance and service life for your equipment. These oils have been tested according to the specifications of HD Hyundai Construction Equipment and, therefore, will meet the highest safety and quality requirements.

We recommend that you use only HD Hyundai Construction Equipment genuine lubricating oils and grease officially approved by HD Hyundai Construction Equipment.

Service point	Kind of fluid	Capacity ℓ (U.S. gal)	Ambient temperature °C (°F)									
			-50 (-58)	-30 (-22)	-20 (-4)	-10 (14)	0 (32)	10 (50)	20 (68)	30 (86)	40 (104)	
Engine oil pan	Engine oil	30 (7.9)	★SAE 0W-30									
				SAE 5W-30								
				SAE 10W-30								
				SAE 15W-40								
Swing drive	Gear oil	7.4 (1.96)	★SAE 75W-90									
Final drive		5.5×2 (1.45×2)		SAE 80W-90								
Hydraulic tank	Hydraulic oil	Tank 210 (55.3)	★ISO VG 15									
			ISO VG 32									
		System 414 (109)		ISO VG 46								
				ISO VG 68								
Fuel tank	Diesel fuel	600 (159)	★ASTM D975 NO.1									
				ASTM D975 NO.2								
Fitting (grease nipple)	Grease	As required	★NLGI NO.1									
				NLGI NO.2								
Radiator (reservoir tank)	Mixture of antifreeze and soft water★ ¹	33 (8.7)	Ethylene glycol base permanent type (50 : 50)									
			★Ethylene glycol base permanent type (60 : 40)									

SAE : Society of Automotive Engineers

★ : Cold region (Russia, CIS, Mongolia)

API : American Petroleum Institute

★1 : Soft water

ISO : International Organization for Standardization

City water or distilled water

NLGI : National Lubricating Grease Institute

ASTM : American Society of Testing and Material

※ Using any lubricating oils other than HD Hyundai Construction Equipment genuine products may lead to a deterioration of performance and cause damage to major components.

※ Do not mix HD Hyundai Construction Equipment genuine oil with any other lubricating oil as it may result in damage to the systems of major components.

※ For HD Hyundai Construction Equipment genuine lubricating oils and grease for use in regions with extremely low temperatures, please contact your local HD Hyundai Construction Equipment dealer.