
6. BUCKET SELECTION GUIDE

1) GENERAL BUCKET

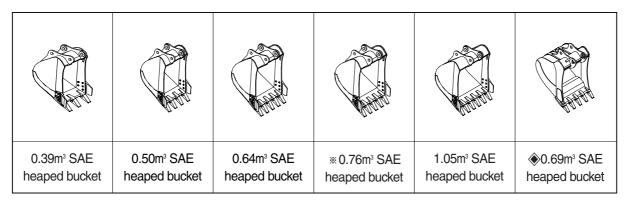

Capacity		Width		Weight	Recommendation				
					5.1m (16' 9") Mono boom			5.1m (16' 9") Hydraulic adjustable boom	
SAE heaped	CECE heaped	Without side cutter	With side cutter	. U	2.0m arm (7' 3")	2.6m arm (8' 6")	3.1m arm (10' 2")	2.2m arm (7' 3")	2.6m arm (8' 6")
0.39m³ (0.51yd³)	0.34m³ (0.44yd³)	620mm (24.4")	740mm (29.1")	410kg (900lb)					
0.50m ³ (0.65yd ³)	0.44m³ (0.58yd³)	760mm (29.9")	880mm (34.6")	470kg (1040lb)					
0.64m ³ (0.84yd ³)	0.55m ³ (0.72yd ³)	920mm (36.2")	1040mm (40.9")	510kg (1120lb)					
* 0.76m³ (0.99yd³)	0.65m ³ (0.85yd ³)	1060mm (41.7")	1180mm (46.5")	570kg (1260lb)					
0.89m³ (1.16yd³)	0.77m³ (1.01yd³)	1220mm (48.0")	1340mm (52.8")	610kg (1340lb)					
1.05m³ (1.37yd³)	0.90m³ (1.18yd³)	1400mm (55.1")	1520mm (59.8")	680kg (1500lb)					
◆0.69m³ (0.9yd³)	0.62m ³ (0.81yd ³)	990mm (39.0")	-						

※ : Standard bucket♦ : Heavy duty bucket

Applicable for materials with density of 2000kg/m³ (3370lb/yd³) or less

Applicable for materials with density of 1600kg/m³ (2700lb/yd³) or less

Applicable for materials with density of 1100kg/m³ (1850lb/yd³) or less