


2. SPECIFICATIONS


1) ROBEX 210LC-7A

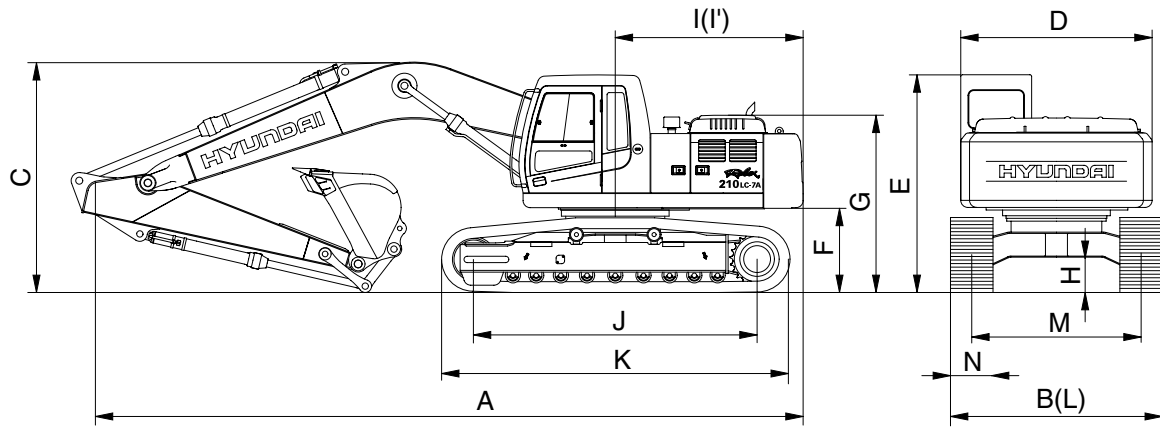

2107A2SP02

Description		Unit	Specification
Operating weight		kg(lb)	21700(47840)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.92(1.20)
Overall length	A	mm(ft-in)	9520(31' 3")
Overall width, with 600mm shoe	B		2990(9' 10")
Overall height	C		2990(9' 10")
Superstructure width	D		2700(8' 10")
Overall height of cab	E		2920(9' 7")
Ground clearance of counterweight	F		1060(3' 6")
Engine cover height	G		2320(7' 7")
Minimum ground clearance	H		480(1' 7")
Rear-end distance	I		2770(9' 1")
Rear-end swing radius	I'		2830(9' 3")
Distance between tumblers	J		3650(12' 0")
Undercarriage length	K		4440(14' 7")
Undercarriage width	L		2990(9' 10")
Track gauge	M		2390(7' 10")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.4/5.3(2.1/3.3)
Swing speed		rpm	12.0
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.46(6.54)


2) R210LC-7A LONG REACH

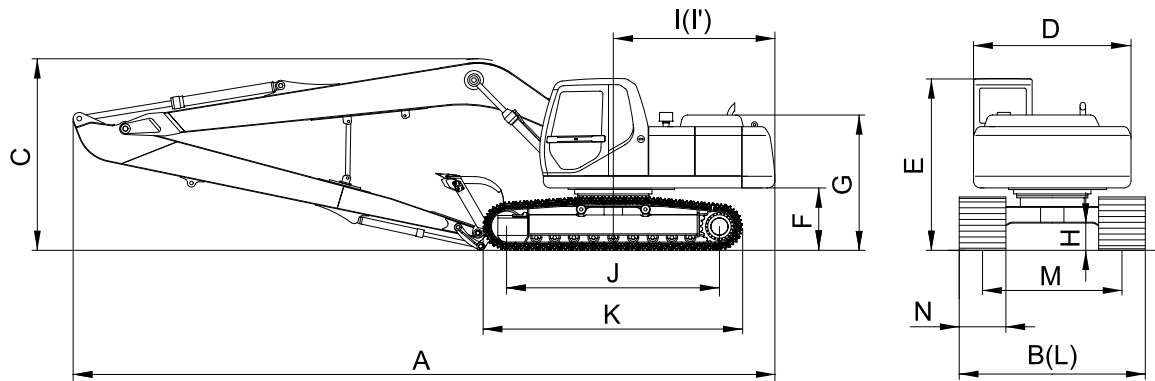

21072SP06

Description		Unit	Specification
Operating weight		kg(lb)	24360(53700)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.51(0.67)
Overall length	A	mm(ft-in)	12030(39' 6")
Overall width, with 800mm shoe	B		3190(10' 6")
Overall height	C		3280(10' 9")
Superstructure width	D		2700(8' 10")
Overall height of cab	E		2920(9' 7")
Ground clearance of counterweight	F		1060(3' 6")
Engine cover height	G		2320(7' 7")
Minimum ground clearance	H		480(1' 7")
Rear-end distance	I		2770(9' 1")
Rear-end swing radius	I'		2830(9' 3")
Distance between tumblers	J		3650(12' 0")
Undercarriage length	K		4440(14' 7")
Undercarriage width	L		3190(10' 6")
Track gauge	M		2390(7' 10")
Track shoe width, standard	N		800(31' 5")
Travel speed(Low/high)		km/hr(mph)	3.4/5.3(2.1/3.3)
Swing speed		rpm	12.0
Gradeability		Degree(%)	35(70)
Ground pressure(800mm shoe)		kgf/cm ² (psi)	0.42(5.97)

3) R210LC-7A HIGH WALKER

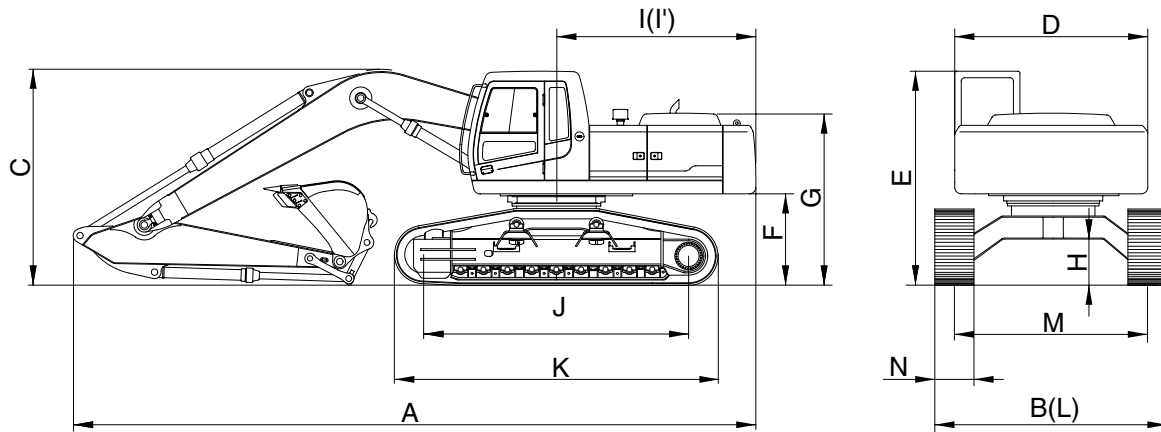

29072SP07

Description		Unit	Specification
Operating weight		kg(lb)	23160(51060)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.92(1.20)
Overall length	A	mm(ft-in)	9470(31' 1")
Overall width, with 600mm shoe	B		3395(11' 2")
Overall height	C		3080(10' 1")
Superstructure width	D		2700(8' 10")
Overall height of cab	E		3100(10' 2")
Ground clearance of counterweight	F		1240(4' 1")
Engine cover height	G		2500(8' 2")
Minimum ground clearance	H		660(2' 2")
Rear-end distance	I		2770(9' 1")
Rear-end swing radius	I'		2830(9' 3")
Distance between tumblers	J		3650(12' 0")
Undercarriage length	K		4440(14' 7")
Undercarriage width	L		3395(11' 2")
Track gauge	M		2795(9' 2")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.4/5.3(2.1/3.3)
Swing speed		rpm	12.0
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.49(6.97)