



4. LEVERS AND PEDALS

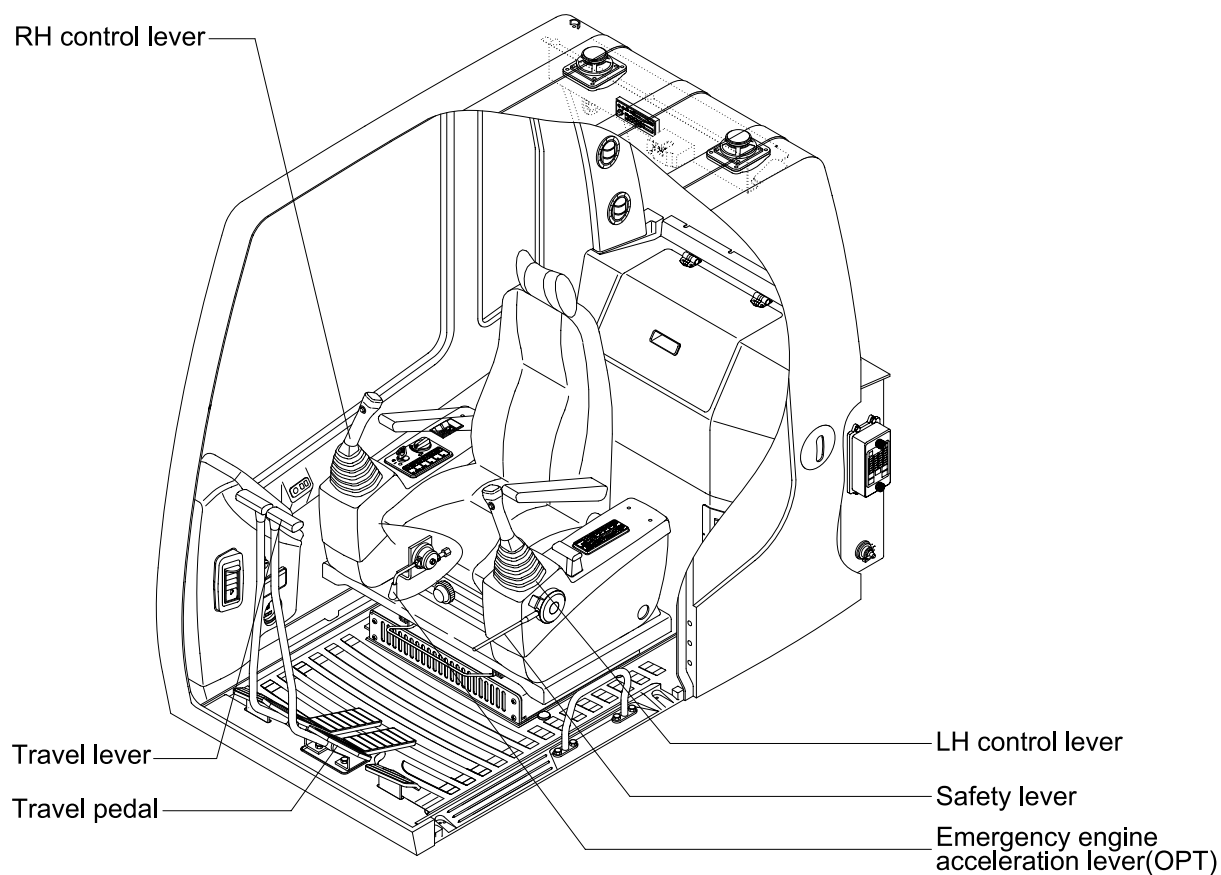


21073CD41A

1) LH CONTROL LEVER




- (1) This joystick is used to control the swing and the arm.
- (2) Refer to **operation of working device** in chapter 4 for details.

2) RH CONTROL LEVER




- (1) This joystick is used to control the boom and the bucket.
- (2) Refer to **operation of working device** in chapter 4 for details.

3) ENGINE ACCELERATION LEVER FOR EMERGENCY(Optional)




- (1) This lever is used to increase or reduce the rotation speed of engine when the abnormality is occurred in the CPU controller. Connect the connector CN-19 and CN-19B of frame harness. Refer to 3-26 page.
- (2) Move the lever up to increase engine RPM.
Move the lever down to decrease engine RPM.
When stopping the engine, turn the key to OFF and move the acceleration lever completely down.

※ METHOD OF CONNECTING EMERGENCY ENGINE ACCELERATION LEVER(Optional)




- (1) Open engine hood and disconnect rod from throttle lever.
- (2) Connect emergency engine acceleration cable to throttle lever at A point.

4) SAFETY LEVER




- (1) All control levers and pedals are disabled from operation by locating the lever to lock position as shown.
※ **Be sure to lower the lever to LOCK position when leaving from operator's seat.**
- (2) By pull lever to UNLOCK position, machine is operational.
※ **Do not use the safety lever for handle when getting on or off the machine.**

5) TRAVEL LEVER




- (1) This lever is mounted on travel pedal and used for traveling by hand. The operation principle is same as the travel pedal.
- (2) Refer to **traveling of the machine** in chapter 4 for details.

6) TRAVEL PEDAL



- (1) This pedal is used to move the machine forward or backward.
- (2) If left side pedal is pressed, left track will move.
If right side pedal is pressed, right track will move.
- (3) Refer to **traveling of machine** in chapter 4 for details.

7) SEAT AND CONSOLE BOX ADJUST LEVER



- (1) This lever is used to move the seat and console box to fit the contours of the operator's body.
- (2) Pull the lever to adjust forward or backward over 220mm(8.7").