


2. DIMENSION AND WEIGHT

1) ROBEX 210NLC-7A

(1) Base machine

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4990(16' 4")
H	Height	mm(ft-in)	2920(9' 7")
W	Width	mm(ft-in)	2500(8' 2")
Wt	Weight	kg(lb)	17410(38380)


※ With 500mm(20") triple grouser shoes and 4700kg(10360lb) counterweight.

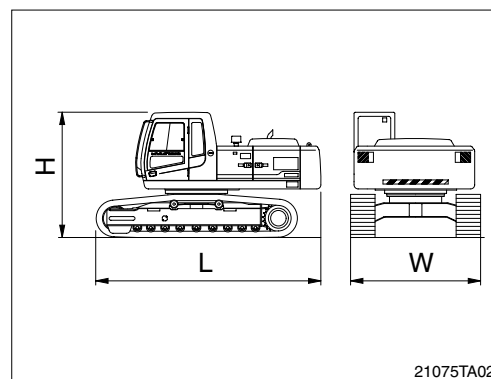

(2) Boom assembly

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	5900(19' 4")
H	Height	mm(ft-in)	1550(5' 1")
W	Width	mm(ft-in)	700(2' 4")
Wt	Weight	kg(lb)	1950(4300)


※ 5.65m(18' 6") boom with arm cylinder(Included piping and pins).

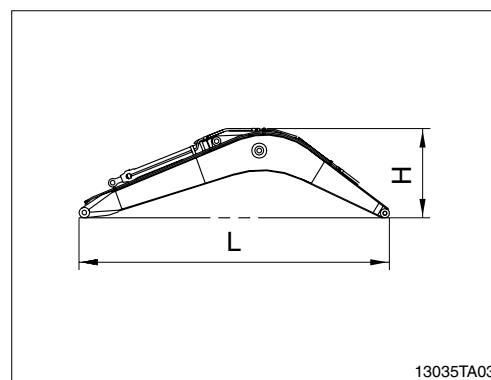

(3) Arm assembly

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	3910(12'10")
H	Height	mm(ft-in)	870(2' 10")
W	Width	mm(ft-in)	350(1' 2")
Wt	Weight	kg(lb)	1050(2310)


※ 2.90m(9' 6") arm with bucket cylinder(Included linkage and pins).

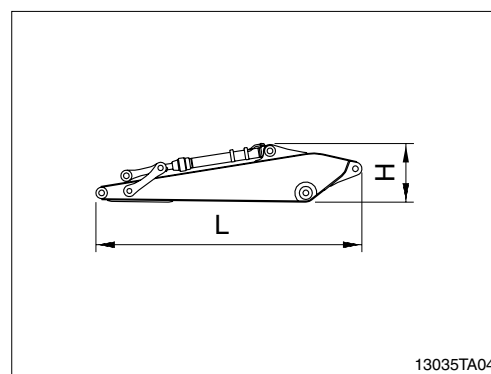

(4) Bucket assembly

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1600(5' 3")
H	Height	mm(ft-in)	980(3' 3")
W	Width	mm(ft-in)	1250(4' 1")
Wt	Weight	kg(lb)	740(1630)


※ 0.87m³(1.14yd³) SAE heaped bucket(Included tooth and side cutters).

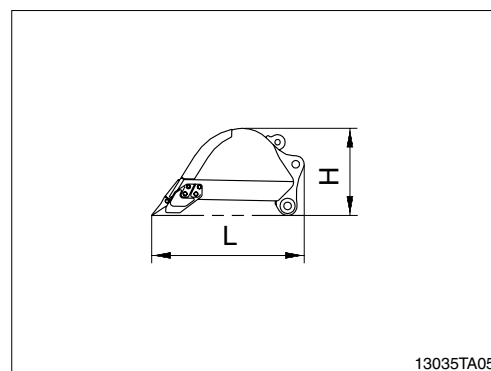

(5) Boom cylinder


Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1960(6' 5")
H	Height	mm(ft-in)	230(0' 9")
W	Width	mm(ft-in)	330(1' 1")
Wt	Weight(2EA)	kg(lb)	380(840)

※ Included piping.

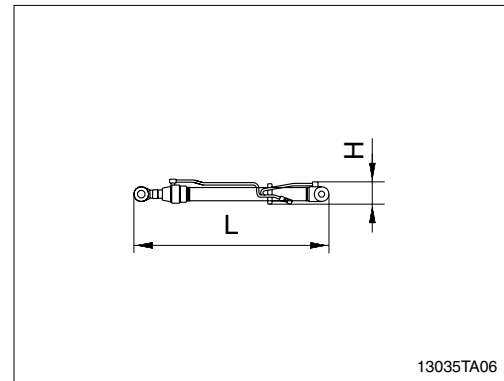

(6) Cab assembly

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1962(6' 4")
H	Height	mm(ft-in)	1676(5' 5")
W	Width	mm(ft-in)	1288(4' 2")
Wt	Weight	kg(lb)	310(680)

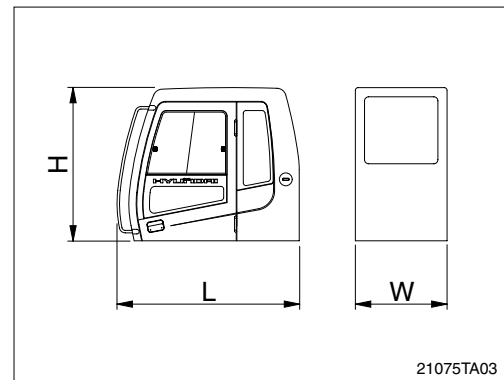

(7) Counterweight

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2700(8' 10")
H	Height	mm(ft-in)	1050(3' 5")
W	Width	mm(ft-in)	560(1' 10")
Wt	Weight	kg(lb)	4700(10360)

