
6. BUCKET SELECTION GUIDE

1) GENERAL BUCKET



| Capacity | | Width | | Weight | Recommendation | |
|--|---------------------|---------------------|-------------------|-------------------|----------------------|-----------------------|
| | | | | | 5.68m (18' 8") boom | 8.2m (26' 11") boom |
| SAE heaped | CECE heaped | Without side cutter | With side cutter | vveigni | 2.92m arm (9' 7") | 6.30m arm (20' 8") |
| 0.52m ³ (0.67yd ³) | 0.45m³ (0.59yd³) | 935mm (36.8") | 1035mm (40.7") | 460kg (1010lb) | | |
| * 0.92m³ (1.20yd³) | 0.80m³ (1.05yd³) | 1150mm (45.3") | 1270mm (50.0") | 770kg (1700lb) | | |
| 1.05m³ (1.37yd³) | 0.90m³ (1.18yd³) | 1250mm (49.2") | 1370mm (53.9") | 810kg (1790lb) | | |
| 1.05m³ (1.37yd³) | 0.87m³ (1.14yd³) | 1115mm (43.9") | 1235mm (48.6") | 850kg (1870lb) | | |
| 1.20m³ (1.57yd³) | 1.00m³ (1.31yd³) | 1400mm (55.1") | 1520mm (59.8") | 850kg (1870lb) | | |

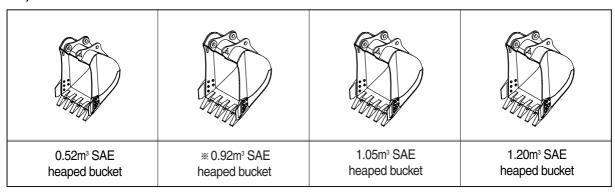

Applicable for materials with density of 2000kgf/m³ (3370lbf/yd³) or less

Applicable for materials with density of 1600kgf/m³ (2700lbf/yd³) or less

Applicable for materials with density of 1100kgf/m³ (1850lbf/yd³) or less

2) HEAVY DUTY, ROCK AND SLOPE FINISHING BUCKET



| Capacity | | Width | | \Mainbt | Recommendation 5.68m (18' 8") boom |
|----------------------|--|---------------------|------------------|--------------------|------------------------------------|
| SAE heaped | CECE heaped | Without side cutter | With side cutter | Weight | 2.92m arm (9' 7") |
| ◆1.05m³ (1.37yd³) | 0.92m ³ (1.20yd ³) | 1290mm (50.8") | - | 890kg (1960lb) | |
| ⊙0.87m³ (1.14yd³) | 0.75m³ (0.98yd³) | 1035mm (40.7") | - | 920kg (2030lb) | |
| ⊙1.05m³ (1.37yd³) | 0.94m³ (1.23yd³) | 1445mm (56.9") | - | 1050kg (2310lb) | |

Applicable for materials with density of 1100kgf/m³ (1850lbf/yd³) or less