


SPECIFICATIONS

1. MAJOR COMPONENT

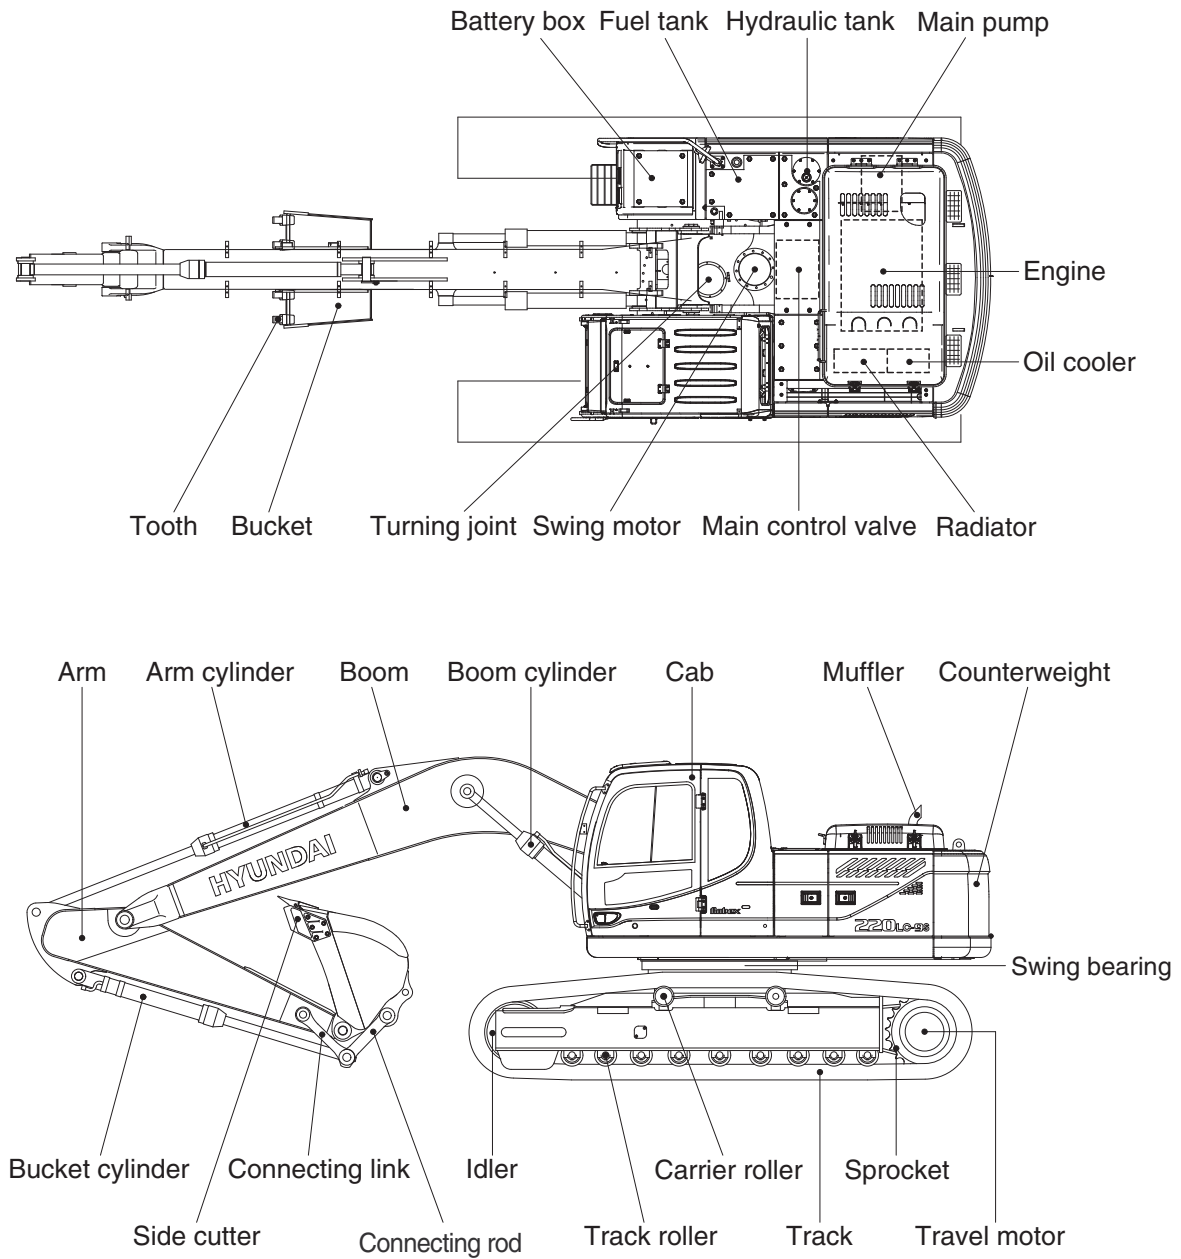


2209S2SP01

2. SPECIFICATIONS

1) R220LC-9S

· 5.68 m (18' 8") BOOM and 2.92 m (9' 7") ARM

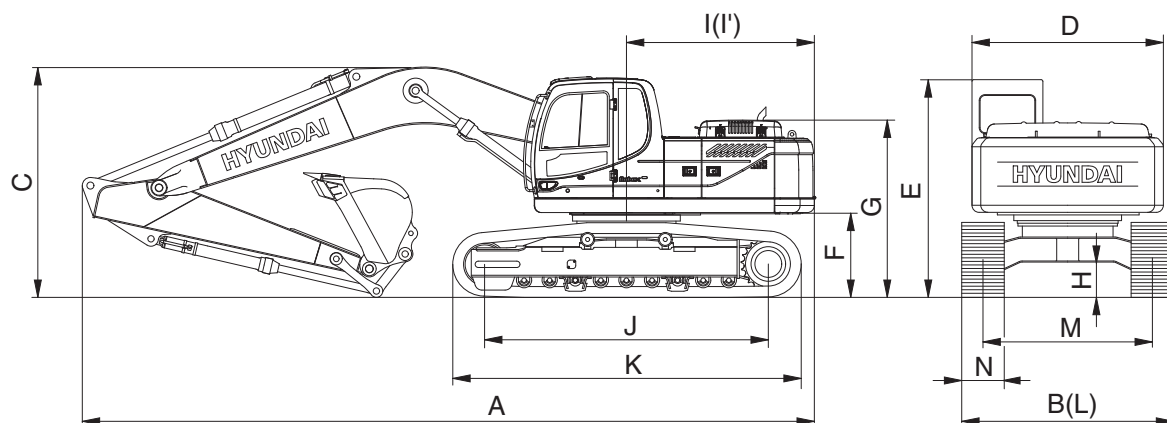


21092SP02

Description		Unit	Specification
Operating weight		kg (lb)	21900 (48280)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.92 (1.20)
Overall length	A	mm (ft-in)	9530 (31' 3")
Overall width, with 600mm shoe	B		2990 (9' 10")
Overall height	C		3030 (9' 11")
Superstructure width	D		2740 (9' 0")
Overall height of cab	E		3000 (9' 10")
Ground clearance of counterweight	F		1060 (3' 6")
Engine cover height	G		2320 (7' 7")
Minimum ground clearance	H		480 (1' 7")
Rear-end distance	I		2770 (9' 1")
Rear-end swing radius	I'		2840 (9' 4")
Distance between tumblers	J		3650 (12' 0")
Undercarriage length	K		4440 (14' 7")
Undercarriage width	L		2990 (9' 10")
Track gauge	M		2390 (7' 10")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)		km/hr (mph)	3.8/5.5 (2.4/3.4)
Swing speed		rpm	11.1
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.46 (6.54)
Max traction force		kg (lb)	21100 (46500)

2) R220LC-9S LONG REACH

· 8.2 m (26' 11") BOOM and 6.3 m (20' 8") ARM

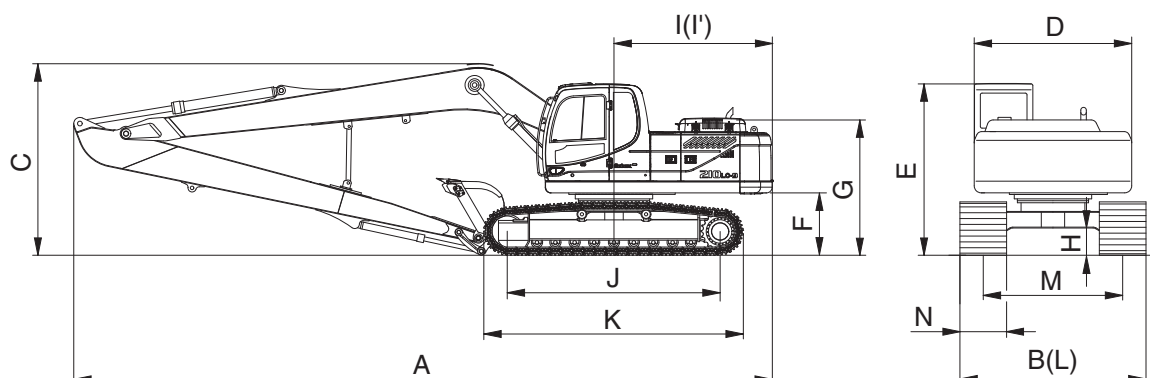


21092SP06

Description		Unit	Specification
Operating weight		kg (lb)	24360 (53700)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.52 (0.68)
Overall length	A	mm (ft-in)	12030 (39' 6")
Overall width, with 800 mm shoe	B		3190 (10' 6")
Overall height	C		3280 (10' 9")
Superstructure width	D		2740 (9' 0")
Overall height of cab	E		3000 (9' 10")
Ground clearance of counterweight	F		1060 (3' 6")
Engine cover height	G		2320 (7' 7")
Minimum ground clearance	H		480 (1' 7")
Rear-end distance	I		2770 (9' 1")
Rear-end swing radius	I'		2840 (9' 4")
Distance between tumblers	J		3650 (12' 0")
Undercarriage length	K		4440 (14' 7")
Undercarriage width	L		3190 (10' 6")
Track gauge	M		2390 (7' 10")
Track shoe width, standard	N		800 (32")
Travel speed (low/high)		km/hr (mph)	3.8/5.5 (2.4/3.4)
Swing speed		rpm	11.1
Gradeability		Degree (%)	35 (70)
Ground pressure (800 mm shoe)		kgf/cm ² (psi)	0.42 (5.97)
Max traction force		kg (lb)	21100 (46500)

3) R220LC-9S HIGH WALKER

· 5.68 m (18' 8") BOOM and 2.92 m (9' 7") ARM

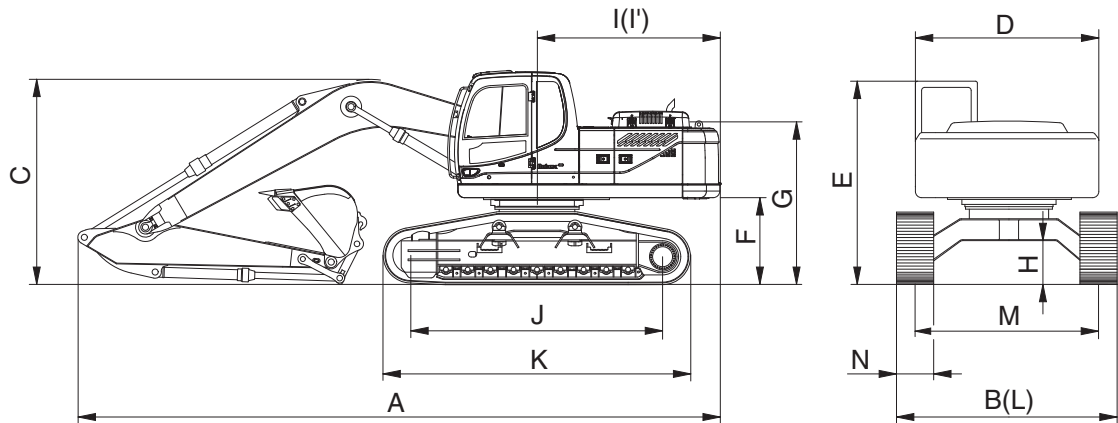


21092SP07

Description		Unit	Specification
Operating weight		kg (lb)	23160 (51060)
Bucket capacity (SAE heaped), standard		m³ (yd³)	0.92 (1.20)
Overall length	A	mm (ft-in)	9470 (31' 1")
Overall width, with 600 mm shoe	B		3395 (11' 2")
Overall height	C		3060 (10' 0")
Superstructure width	D		2740 (9' 0")
Overall height of cab	E		3100 (10' 2")
Ground clearance of counterweight	F		1240 (4' 1")
Engine cover height	G		2500 (8' 2")
Minimum ground clearance	H		660 (2' 2")
Rear-end distance	I		2770 (9' 1")
Rear-end swing radius	I'		2840 (9' 4")
Distance between tumblers	J		3650 (12' 0")
Undercarriage length	K		4440 (14' 7")
Undercarriage width	L		3395 (11' 2")
Track gauge	M		2795 (9' 2")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)		km/hr (mph)	3.8/5.5 (2.4/3.4)
Swing speed		rpm	11.1
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm² (psi)	0.49 (6.97)
Max traction force		kg (lb)	21100 (46500)

4) R220LC-9S AMPHIBIOUS

- 8.2 m (26' 11") BOOM and 6.3 m (20' 8") ARM

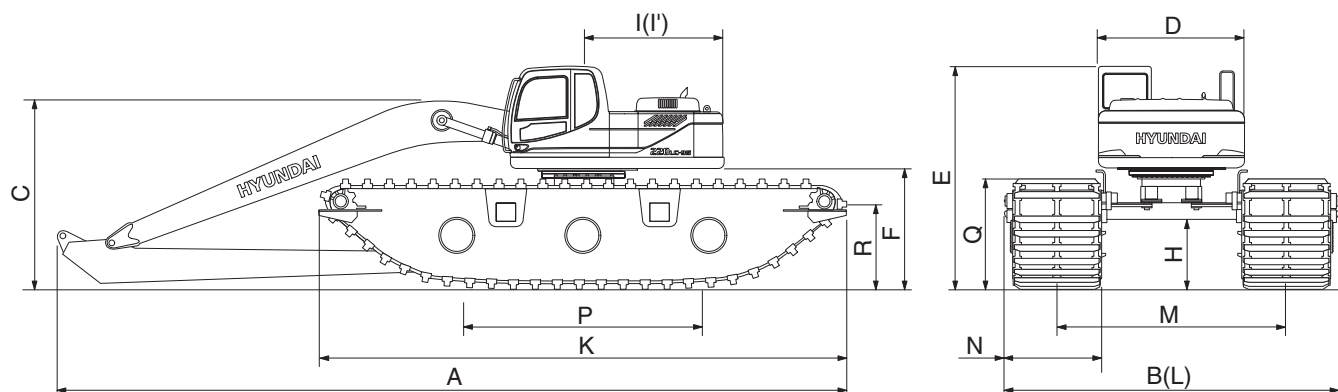


2209A2SP11

Description		Unit	Specification
Operating weight		kg (lb)	36370 (81040)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.52 (0.68)
Overall length	A	mm (ft-in)	13870 (45' 6")
Overall width (min/max)	B		4800/6280 (15' 9"/20' 7")
Overall height of boom	C		3730 (12' 3")
Superstructure width	D		2740 (9' 0")
Overall height of cab	E		4020 (13' 2")
Ground clearance of counterweight	F		2170 (7' 0")
Minimum ground clearance	H		1300 (4' 3")
Rear-end distance	I		2770 (9' 1")
Rear-end swing radius	I'		2840 (9' 4")
Maximum track length	K		9630 (31' 7")
Track width (min/max)	L		4470/5950 (14' 8"/19' 6")
Track gauge (min/max)	M		2850/4330 (9' 4"/14' 2")
Pontoon Width	N		1620 (5' 4")
Track length on ground	P		4150 (13' 7")
Track height	Q		2030 (6' 8")
Estimated Water Level	R		1550 (5' 1")
Travel speed (low/high)		km/hr (mph)	3.0/4.8 (1.9/3.0)
Swing speed		rpm	12.0

3. WORKING RANGE

1) R220LC-9S

· 5.68 m (18' 8") BOOM

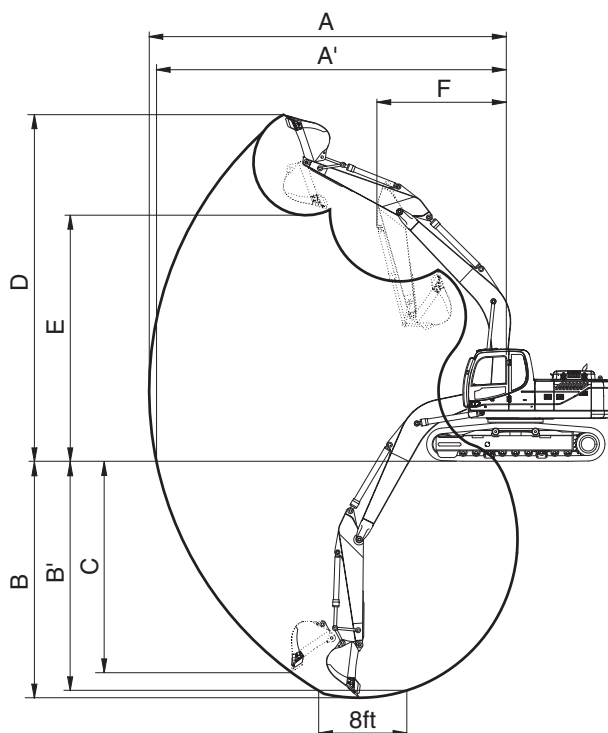


21092SP03

Description		2.0 m (6' 7") Arm	2.40 m (7' 10") Arm	2.92 m (9' 7") Arm	3.90 m (12' 10") Arm
Max digging reach	A	9140 mm (30' 0")	9500 mm (31' 2")	9980 mm (32' 9")	10910 mm (35' 10")
Max digging reach on ground	A'	8960 mm (29' 5")	9330 mm (30' 7")	9820 mm (32' 3")	10770 mm (35' 4")
Max digging depth	B	5820 mm (19' 1")	6220 mm (20' 5")	6730 mm (22' 1")	7720 mm (25' 4")
Max digging depth (8 ft level)	B'	5580 mm (18' 4")	6010 mm (19' 9")	6560 mm (21' 6")	7580 mm (24' 10")
Max vertical wall digging depth	C	5280 mm (17' 4")	5720 mm (18' 9")	6280 mm (20' 7")	7240 mm (23' 9")
Max digging height	D	9140 mm (30' 0")	9340 mm (30' 8")	9600 mm (31' 6")	10110 mm (33' 2")
Max dumping height	E	6330 mm (20' 9")	6520 mm (21' 5")	6780 mm (22' 3")	7290 mm (23' 11")
Min swing radius	F	3750 mm (12' 4")	3740 mm (12' 3")	3740 mm (12' 3")	3650 mm (12' 0")
Bucket digging force	SAE	133.4 [144.8] kN	133.4 [144.8] kN	133.4 [144.8] kN	133.4 [144.8] kN
		13600 [14770] kgf	13600 [14770] kgf	13600 [14770] kgf	13600 [14770] kgf
		29980 [32550] lbf	29980 [32550] lbf	29980 [32550] lbf	29980 [32550] lbf
	ISO	152.0 [165.0] kN	152.0 [165.0] kN	152.0 [165.0] kN	152.0 [165.0] kN
		15500 [16830] kgf	15500 [16830] kgf	15500 [16830] kgf	15500 [16830] kgf
		34170 [37100] lbf	34170 [37100] lbf	34170 [37100] lbf	34170 [37100] lbf
Arm digging force	SAE	144.2 [156.5] kN	119.6 [129.9] kN	102.0 [110.7] kN	84.3 [91.6] kN
		14700 [15960] kgf	12200 [13250] kgf	10400 [11290] kgf	8600 [9340] kgf
		32410 [35190] lbf	26900 [29210] lbf	22930 [24900] lbf	18960 [20590] lbf
	ISO	151.0 [164.0] kN	125.5 [136.3] kN	106.9 [116.1] kN	87.3 [94.8] kN
		15400 [16720] kgf	12800 [13900] kgf	10900 [11830] kgf	8900 [9660] kgf
		33950 [36860] lbf	28220 [30640] lbf	24030 [26090] lbf	19620 [21300] lbf

[] : Power boost

2) R220LC-9S LONG REACH
 · 8.2 m (26' 11") BOOM

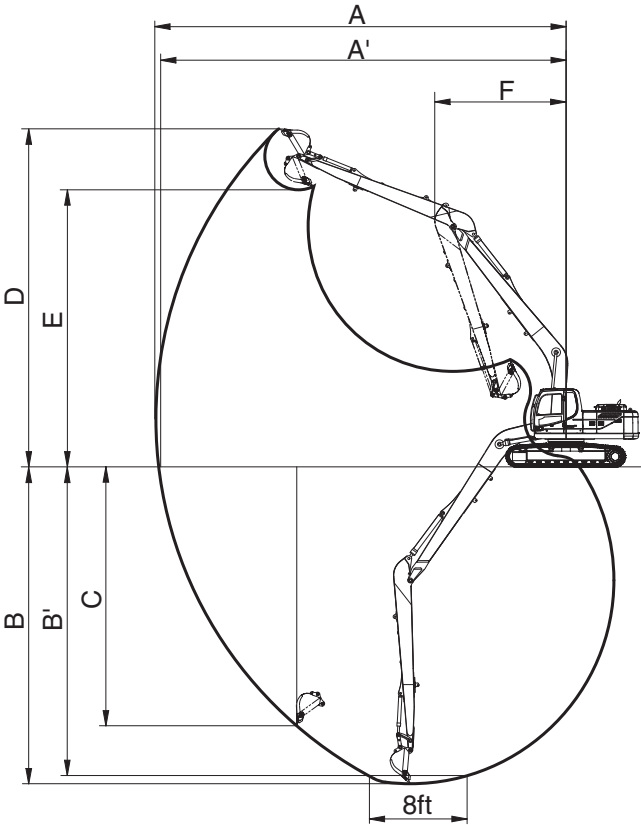


21092SP08

Description		6.3 m (20' 8") Arm
Max digging reach	A	15220 (50' 0")
Max digging reach on ground	A'	15120 (49' 7")
Max digging depth	B	11760 (38' 7")
Max digging depth (8 ft level)	B'	11650 (38' 3")
Max vertical wall digging depth	C	9610 (31' 6")
Max digging height	D	12550 (41' 2")
Max dumping height	E	10280 (33' 8")
Min swing radius	F	4870 (16' 0")
Bucket digging force	SAE	72.6 kN
		7400 kgf
		16310 lbf
	ISO	83.4 kN
		8500 kgf
		18740 lbf
Arm crowd force	SAE	49.0 kN
		5000 kgf
		11020 lbf
	ISO	50.0 kN
		5100 kgf
		11240 lbf

3) R220LC-9S HIGH WALKER

· 5.68 m (18' 8") BOOM

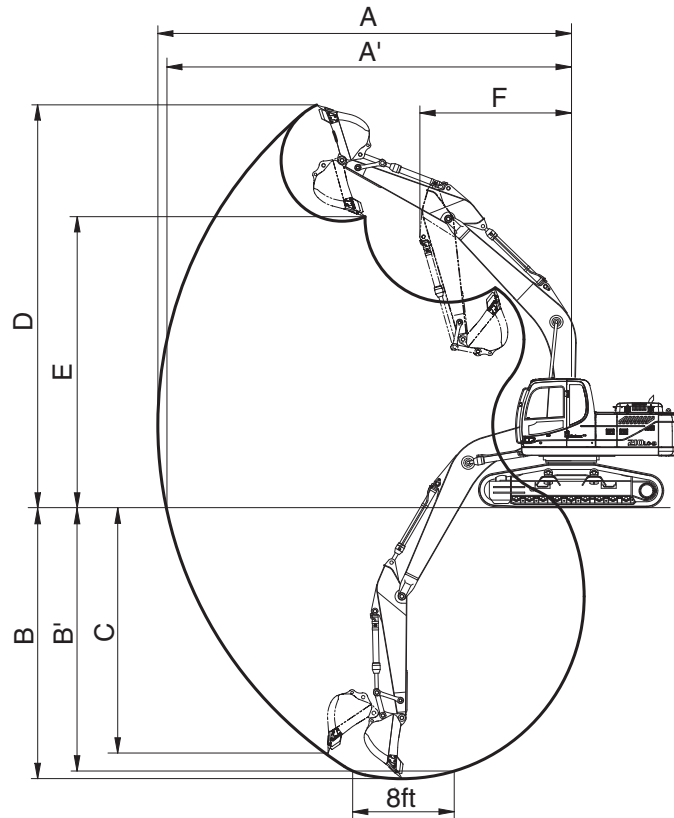


21092SP09

Description		2.0 m (6' 7") Arm	2.40 m (7' 10") Arm	2.92 m (9' 7") Arm	3.90 m (12'10") Arm
Max digging reach	A	9140 mm (30' 0")	9500 mm (31' 2")	9980 mm (32' 9")	10910 mm (35'10")
Max digging reach on ground	A'	8920 mm (29' 3")	9290 mm (30' 6")	9820 mm (32' 3")	10730 mm (35' 2")
Max digging depth	B	5630 mm (18' 6")	6010 mm (19' 9")	6550 mm (21' 6")	7530 mm (24' 8")
Max digging depth (8 ft level)	B'	5390 mm (17' 8")	5820 mm (19' 1")	6380 mm (20'11")	7390 mm (24' 3")
Max vertical wall digging depth	C	5090 mm (16' 8")	5630 mm (18' 6")	6100 mm (20' 0")	7050 mm (23' 1")
Max digging height	D	9330 mm (30' 7")	9530 mm (31' 3")	9780 mm (32' 1")	10300 mm (33' 9")
Max dumping height	E	6520 mm (21' 5")	6710 mm (22' 0")	6960 mm (22'10")	7480 mm (24' 6")
Min swing radius	F	3750 mm (12' 4")	3740 mm (12' 3")	3740 mm (12' 3")	3650 mm (12' 0")
Bucket digging force	SAE	133.4 [144.8] kN	133.4 [144.8] kN	133.4 [144.8] kN	133.4 [144.8] kN
		13600 [14770] kgf	13600 [14770] kgf	13600 [14770] kgf	13600 [14770] kgf
		29980 [32550] lbf	29980 [32550] lbf	29980 [32550] lbf	29980 [32550] lbf
	ISO	152.0 [165.0] kN	152.0 [165.0] kN	152.0 [165.0] kN	152.0 [165.0] kN
		15500 [16830] kgf	15500 [16830] kgf	15500 [16830] kgf	15500 [16830] kgf
		34170 [37100] lbf	34170 [37100] lbf	34170 [37100] lbf	34170 [37100] lbf
Arm crowd force	SAE	144.2 [156.5] kN	119.6 [129.9] kN	102.0 [110.7] kN	84.3 [91.6] kN
		14700 [15960] kgf	12200 [13250] kgf	10400 [11290] kgf	8600 [9340] kgf
		32410 [35190] lbf	26900 [29210] lbf	22930 [24900] lbf	18960 [20590] lbf
	ISO	151.0 [164.0] kN	125.5 [136.3] kN	106.9 [116.1] kN	87.3 [94.8] kN
		15400 [16720] kgf	12800 [13900] kgf	10900 [11830] kgf	8900 [9660] kgf
		33950 [36860] lbf	28220 [30640] lbf	24030 [26090] lbf	19620 [21300] lbf

[] : Power boost

4) R220LC-9S AMPHIBIOUS

• 8.2 m (26' 11") BOOM

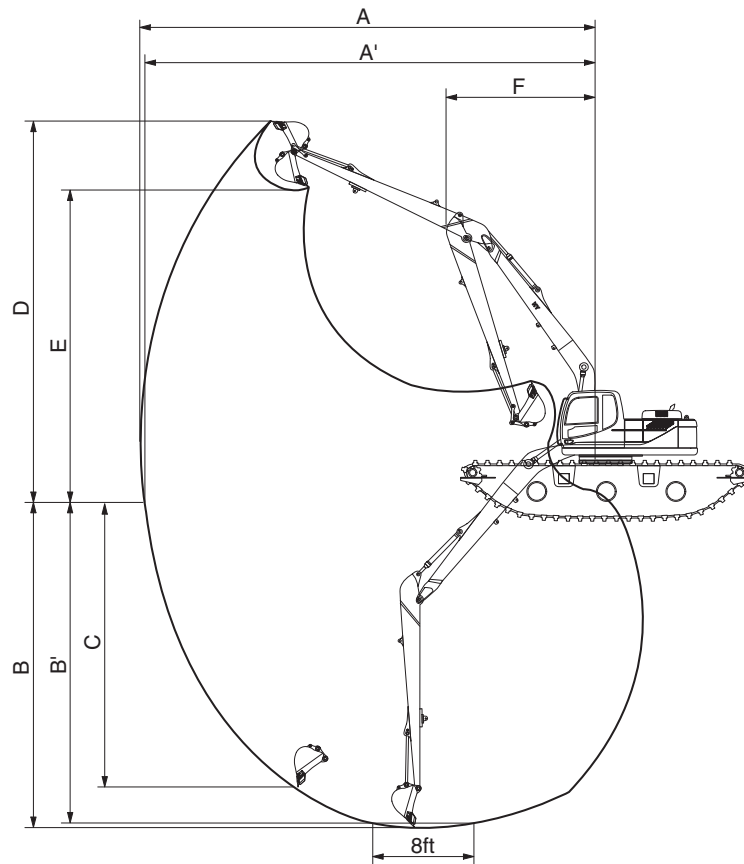

2209A2SP12

Description		6.3 m (20' 8") Arm
Max digging reach	A	15220 mm (50' 0")
Max digging reach on ground	A'	14940 mm (49' 0")
Max digging depth	B	10630 mm (34' 11")
Max digging depth (8ft level)	B'	10520 mm (34' 6")
Max vertical wall digging depth	C	8480 mm (27' 10")
Max digging height	D	13670 mm (44' 10")
Max dumping height	E	11410 mm (37' 5")
Min swing radius	F	4870 mm (16' 0")
Bucket digging force	SAE	72.6 kN
		7400 kgf
		16310 lbf
	ISO	83.4 kN
		8500 kgf
		18740 lbf
Arm crowd force	SAE	49.0 kN
		5000 kgf
		11020 lbf
	ISO	50.0 kN
		5100 kgf
		11240 lbf

4. WEIGHT

1) R220LC-9S

Item	R220LC-9S	
	kg	lb
Upperstructure assembly	9400	20720
Main frame weld assembly	1920	4230
Engine assembly	530	1170
Main pump assembly	140	310
Main control valve assembly	220	485
Swing motor assembly	240	530
Hydraulic oil tank assembly	240	530
Fuel tank assembly	195	430
Counterweight	3800	8380
Cab assembly	440	970
Lower chassis assembly	8700	19180
Track frame weld assembly	2720	6000
Swing bearing	290	640
Travel motor assembly	300	660
Turning joint	55	120
Track recoil spring	140	310
Idler	170	370
Carrier roller	20	45
Track roller	40	90
Track-chain assembly (600 mm standard triple grouser shoe)	1350	2980
Front attachment assembly (5.68 m boom, 2.92 m arm, 0.92 m³ SAE heaped bucket)	4030	8880
5.68 m boom assembly	1520	3350
2.92 m arm assembly	750	1650
0.92 m³ SAE heaped bucket	765	1690
Boom cylinder assembly	180	400
Arm cylinder assembly	290	640
Bucket cylinder assembly	175	390
Bucket control link assembly	170	370

2) R220LC-9S LONG REACH

Item	R220LC-9S LONG REACH	
	kg	lb
Upperstructure assembly	9400	20720
Main frame weld assembly	1920	4230
Engine assembly	530	1170
Main pump assembly	140	310
Main control valve assembly	220	485
Swing motor assembly	240	530
Hydraulic oil tank assembly	240	530
Fuel tank assembly	195	430
Counterweight	5300	11680
Cab assembly	440	970
Lower chassis assembly	8700	19180
Track frame weld assembly	2720	6000
Swing bearing	290	640
Travel motor assembly	300	660
Turning joint	55	120
Track recoil spring	140	310
Idler	170	370
Carrier roller	20	45
Track roller	40	90
Track-chain assembly (800 mm standard triple grouser shoe)	1660	3660
Front attachment assembly (8.2 m boom, 6.3 m arm, 0.52 m³ SAE heaped bucket)	4600	10140
8.2 m boom assembly	2105	4640
6.3 m arm assembly	1100	2430
0.52 m³ SAE heaped bucket	465	1030
Boom cylinder assembly	180	400
Arm cylinder assembly	270	600
Bucket cylinder assembly	130	290
Bucket control rod assembly	170	370

3) R220LC-9S HIGH WALKER

Item	R220LC-9S HIGH WALKER	
	kg	lb
Upperstructure assembly	9430	20790
Main frame weld assembly	1950	4300
Engine assembly	530	1170
Main pump assembly	140	310
Main control valve assembly	220	485
Swing motor assembly	240	530
Hydraulic oil tank assembly	240	530
Fuel tank assembly	195	430
Counterweight	3800	8380
Cab assembly	440	970
Lower chassis assembly	9015	19870
Track frame weld assembly	3730	8220
Swing bearing	290	640
Travel motor assembly	300	660
Turning joint	55	120
Track recoil spring	140	310
Idler	170	370
Carrier roller	20	45
Track roller	40	90
Track-chain assembly (600 mm standard triple grouser shoe)	1350	2980
Front attachment assembly (5.68 m boom, 2.92 m arm, 0.92 m³ SAE heaped bucket)	4030	8880
5.68 m boom assembly	1520	3350
2.92 m arm assembly	750	1650
0.92 m³ SAE heaped bucket	765	1690
Boom cylinder assembly	180	400
Arm cylinder assembly	290	640
Bucket cylinder assembly	175	390
Bucket control rod assembly	170	370

4) R220LC-9S AMPHIBIOUS

Item	R220LC-9S AMPHIBIOUS	
	kg	lb
Upperstructure assembly	9400	20720
Main frame weld assembly	1920	4230
Engine assembly	520	1150
Main pump assembly	140	310
Main control valve assembly	220	485
Swing motor assembly	240	530
Hydraulic oil tank assembly	240	530
Fuel tank assembly	195	430
Counterweight	5300	11680
Cab assembly	310	680
Undercarriage assembly	21130	46580
Swing bearing	290	640
Travel motor assembly	300	660
Turning joint	55	120
Front attachment assembly (8.2 m boom, 6.3 m arm, 0.52 m³ SAE heaped bucket)	4600	10140
8.2 m boom assembly	2105	4640
6.3 m arm assembly	1100	2430
0.52 m³ SAE heaped bucket	465	1030
Boom cylinder assembly	180	400
Arm cylinder assembly	270	600
Bucket cylinder assembly	130	290
Bucket control linkage assembly	170	370

5. LIFTING CAPACITIES

1) ROBEX 220LC-9S

(1) 5.68 m (18' 8") boom, 2.92 m (9' 7") arm equipped with 0.92 m³ (SAE heaped) bucket, 600 mm (24") triple grouser shoe.

Load point height		Load radius										At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
														m (ft)
7.5 m (25 ft)	kg lb											*3360 *7410	3150 6940	7.78 (25.5)
6.0 m (20 ft)	kg lb									*2340 *5160	*2340 *5160	*3450 *7610	2460 5420	8.74 (28.7)
4.5 m (15 ft)	kg lb							*4010 *8840	*4010 *8840	*3830 *8440	3180 7010	*3580 *7890	2100 4630	9.32 (30.6)
3.0 m (10 ft)	kg lb			*9780 *21560	*9780 *21560	*6150 *13560	*6150 *13560	*4840 *10670	4460 9830	*4230 *9330	3040 6700	3440 7580	1930 4250	9.59 (31.5)
1.5 m (5 ft)	kg lb			*8810 *19420	*8810 *19420	*7960 *17550	6490 14310	*5750 *12680	4160 9170	*4710 *10380	2880 6350	3390 7470	1880 4140	9.59 (31.5)
Ground Line	kg lb			*9550 *21050	*9550 *21050	*9160 *20190	6090 13430	*6490 *14310	3920 8640	4930 10870	2750 6060	3520 7760	1950 4300	9.31 (30.5)
-1.5 m (-5 ft)	kg lb	*8810 *19420	*8810 *19420	*12610 *27800	11870 26170	*9600 *21160	5940 13100	*6870 *15150	3800 8380	4860 10710	2690 5930	3920 8640	2190 4830	8.72 (28.6)
-3.0 m (-10 ft)	kg lb	*12190 *26870	*12190 *26870	*13980 *30820	12040 26540	*9320 *20550	5960 13140	*6740 *14860	3800 8380			*4460 *9830	2710 5970	7.75 (25.4)
-4.5 m (-15 ft)	kg lb			*11860 *26150	*11860 *26150	*8120 *17900	6140 13540					*4330 *9550	4080 8990	6.16 (20.2)

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. *indicates load limited by hydraulic capacity.

(2) 5.68 m (18' 8") boom, 2.40 m (7' 10") arm equipped with 0.92 m³ (SAE heaped) bucket, 600 mm (24") triple grouser shoe.

Load point height		Load radius										At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
														m (ft)
7.5 m (25 ft)	kg lb											*3700 *8160	3640 8020	7.15 (23.5)
6.0 m (20 ft)	kg lb							*4010 *8840	*4010 *8840			*3780 *8330	2760 6080	8.20 (26.9)
4.5 m (15 ft)	kg lb							*4490 *9900	*4490 *9900	*4230 *9330	3130 6900	*3900 *8600	2340 5160	8.82 (28.9)
3.0 m (10 ft)	kg lb					*6900 *15210	*6900 *15210	*5280 *11640	4400 9700	*4560 *10050	3010 6640	3760 8290	2130 4700	9.11 (29.9)
1.5 m (5 ft)	kg lb					*8560 *18870	6380 14070	*6120 *13490	4130 9110	*4970 *10960	2880 6350	3710 8180	2080 4590	9.10 (29.9)
Ground Line	kg lb			*8790 *19380	*8790 *19380	*9490 *20920	6080 13400	*6740 *14860	3930 8660	4950 10910	2780 6130	3890 8580	2180 4810	8.81 (28.9)
-1.5 m (-5 ft)	kg lb	*9760 *21520	*9760 *21520	*13510 *29780	12060 26590	*9650 *21270	6000 13230	*6960 *15340	3850 8490			4390 9680	2480 5470	8.18 (26.8)
-3.0 m (-10 ft)	kg lb	*14150 *31200	*14150 *31200	*13240 *29190	12280 27070	*9090 *20040	6080 13400	*6590 *14530	3900 8600			*4700 *10360	3190 7030	7.12 (23.4)
-4.5 m (-15 ft)	kg lb			*10630 *23440	*10630 *23440	*7400 *16310	6330 13960							

2) R220LC-9S LONG REACH

(1) 8.2 m (26' 11") boom, 6.3 m (20' 8") arm equipped with 0.52 m³ (0.68 yd³) (SAE heaped) bucket, 800 mm (32") triple grouser shoe.

•  : Rating over-front •  : Rating over-side or 360 degree

Load point height		Load radius														At max. reach		
		4.5 m (15.0 ft)		6.0 m (20.0ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)		10.5 m (35.0 ft)		12.0 m (40.0 ft)		13.5 m (45.0 ft)		Capacity		Reach
																		m (ft)
10.5 m 35.0 ft	kg lb															*1480 *3260	*1480 *3260	12.11 (39.7)
9.0 m 30.0 ft	kg lb											*930 *2050	*930 *2050			*1510 *3330	*1510 *3330	13.11 (43.0)
7.5 m 25.0 ft	kg lb											*1550 *3420	*1550 *3420			*1550 *3420	1320 2910	13.84 (45.4)
6.0 m 20.0 ft	kg lb									*1600 *3530	*1600 *3530	*1610 *3550	*1610 *3550			*1600 *3530	1160 2560	14.37 (47.1)
4.5 m 15.0 ft	kg lb									*1790 *3950	*1790 *3950	*1730 *3810	1720 3790	*1260 *2780	*1260 *2780	*1660 *3660	1050 2310	14.72 (48.3)
3.0 m 10.0 ft	kg lb					*2520 *5560	*2520 *5560	*2220 *4890	*2220 *4890	*2020 *4450	*2020 *4450	*1880 *4140	1630 3590	*1590 *3510	1220 2690	*1720 *3790	980 2160	14.89 (48.9)
1.5 m 5.0 ft	kg lb	*5620 *12390	*5620 *12390	*3940 *8690	*3940 *8690	*3090 *6810	*3090 *6810	*2590 *5710	*2590 *5710	*2270 *5000	2000 4410	*2050 *4520	1530 3370	*1790 *3950	1170 2580	*1800 *3970	940 2070	14.90 (48.9)
Ground /line	kg lb	*6990 *15410	6720 14820	*4770 *10520	4490 9900	*3620 *7980	3240 7140	*2950 *6500	2430 5360	*2510 *5530	1860 4100	*2220 *4890	1440 3170	*1820 *4010	1110 2450	1880 4140	930 2050	14.75 (48.4)
-1.5 m -5.0 ft	kg lb	*7830 *17260	6210 13690	*5390 *11880	4120 9080	*4060 *8950	2990 6590	*3260 *7190	2260 4980	*2740 *6040	1740 3840	*2380 *5250	1360 3000	*1570 *3460	1070 2360	1930 4250	960 2120	14.42 (47.3)
-3.0 m -10.0 ft	kg lb	*8230 *18140	5990 13210	*5780 *12740	3920 8640	*4370 *9630	2830 6240	*3490 *7690	2140 4720	*2900 *6390	1660 3660	*2490 *5490	1310 2890			2030 4480	1020 2250	13.92 (45.7)
-4.5 m -15.0 ft	kg lb	*8310 *18320	5940 13100	*5950 *13120	3830 8440	*4540 *10010	2740 6040	*3630 *8000	2070 4560	*3000 *6610	1620 3570	2510 5530	1290 2840			*2210 *4870	1140 2510	13.20 (43.3)
-6.0 m -20.0 ft	kg lb	*8100 *17860	6010 13250	*5900 *13010	3840 8470	*4550 *10030	2730 6020	*3640 *8020	2060 4540	*2970 *6550	1620 3570					*2340 *5160	1330 2930	12.25 (40.2)
-7.5 m -25.0 ft	kg lb	*7580 *16710	6180 13620	*5610 *12370	3930 8660	*4350 *9590	2790 6150	*3460 *7630	2120 4670	*2740 *6040	1690 3730					*2460 *5420	1670 3680	10.97 (36.0)
-9.0 m -30.0 ft	kg lb	*6650 *14660	6460 14240	*4980 *10980	4110 9060	*3840 *8470	2940 6480	*2930 *6460	2260 4980									
-10.5 m -35.0 ft	kg lb	*5040 *11110	*5040 *11110	*3730 *8220	*3730 *8220													

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. *indicates load limited by hydraulic capacity.

3) R220LC-9S HIGH WALKER

(1) 5.68 m (18' 8") boom, 2.92 m (9' 7") arm equipped with 0.92 m³ (SAE heaped) bucket, 600 mm (24") triple grouser shoe.

Load point height		Load radius										At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
														m (ft)
7.5 m (25 ft)	kg lb											*3370 *7430	*3370 *7430	7.93 (26.0)
6.0 m (20 ft)	kg lb									*2700 *5950	*2700 *5950	*3460 *7630	3130 6900	8.83 (29.0)
4.5 m (15 ft)	kg lb							*4110 *9060	*4110 *9060	*3870 *8530	*3870 *8530	*3600 *7940	2740 6040	9.37 (30.7)
3.0 m (10 ft)	kg lb			*10440 *23020	*10440 *23020	*6400 *14110	*6400 *14110	*4960 *10930	*4960 *10930	*4290 *9460	3930 8660	3680 8110	2560 5640	9.60 (31.5)
1.5 m (5 ft)	kg lb			*8610 *18980	*8610 *18980	*8150 *17970	*8150 *17970	*5860 *12920	5380 11860	*4760 *10490	3770 8310	3650 8050	2530 5580	9.57 (31.4)
Ground Line	kg lb			*9870 *21760	*9870 *21760	*9260 *20410	8080 17810	*6560 *14460	5150 11350	*5150 *11350	3640 8020	3820 8420	2650 5840	9.25 (30.3)
-1.5 m (-5 ft)	kg lb	*9210 *20300	*9210 *20300	*13090 *28860	*13090 *28860	*9600 *21160	7940 17500	*6880 *15170	5040 11110	5200 11460	3590 7910	4280 9440	2980 6570	8.62 (28.3)
-3.0 m (-10 ft)	kg lb	*12660 *27910	*12660 *27910	*13780 *30380	*13780 *30380	*9230 *20350	7990 17610	*6670 *14700	5060 11160			*4470 *9850	3710 8180	7.59 (24.9)
-4.5 m (-15 ft)	kg lb			*11470 *25290	*11470 *25290	*7860 *17330	*7860 *17330					*4250 *9370	*4250 *9370	5.89 (19.3)

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. *indicates load limited by hydraulic capacity.

(2) 5.68 m (18' 8") boom, 2.4 m (7' 10") arm equipped with 0.92 m³ (SAE heaped) bucket, 600 mm (24") triple grouser shoe.

Load point height		Load radius										At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
														m (ft)
7.5 m (25 ft)	kg lb											*3700 *8160	*3700 *8160	7.31 (24.0)
6.0 m (20 ft)	kg lb							*4050 *8930	*4050 *8930			*3790 *8360	3480 7670	8.30 (27.2)
4.5 m (15 ft)	kg lb					*5360 *11820	*5360 *11820	*4580 *10100	*4580 *10100	*4260 *9390	4030 8880	*3920 *8640	3020 6660	8.87 (29.1)
3.0 m (10 ft)	kg lb					*7130 *15720	*7130 *15720	*5390 *11880	*5390 *11880	*4610 *10160	3900 8600	4010 8840	2810 6190	9.12 (29.9)
1.5 m (5 ft)	kg lb					*8720 *19220	8370 18450	*6220 *13710	5360 11820	*5020 *11070	3770 8310	3990 8800	2780 6130	9.08 (29.8)
Ground Line	kg lb			*9350 *20610	*9350 *20610	*9550 *21050	8080 17810	*6790 *14970	5170 11400	5290 11660	3670 8090	4210 9280	2940 6480	8.75 (28.7)
-1.5 m (-5 ft)	kg lb	*10290 *22690	*10290 *22690	*14180 *31260	*14180 *31260	*9620 *21210	8020 17680	*6950 *15320	5100 11240			*4650 *10250	3360 7410	8.07 (26.5)
-3.0 m (-10 ft)	kg lb	*14760 *32540	*14760 *32540	*12990 *28640	*12990 *28640	*8950 *19730	8120 17900	*6470 *14260	5170 11400			*4690 *10340	4350 9590	6.94 (22.8)
-4.5 m (-15 ft)	kg lb			*10150 *22380	*10150 *22380	*7020 *15480	*7020 *15480							

4) R220LC-9S AMPHIBIOUS

(1) 8.2 m (26' 11") boom, 6.3 m (20' 8") arm equipped with 0.52 m³ (SAE heaped) bucket, 800 mm (32") triple grouser shoe.




-  : Rating over-front
-  : Rating over-side or 360 degree

Load point height		Load radius														At max. reach			
		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)		10.5 m (35.0 ft)		12.0 m (40.0 ft)		13.5 m (45.0 ft)		Capacity		Reach	
																		m (ft)	
12.0 m	kg																*1460	*1460	11.82
(40.0 ft)	lb																*3220	*3220	(38.8)
10.5 m	kg																*1480	*1480	12.88
(35.0 ft)	lb																*3260	*3260	(42.3)
9.0 m	kg											*1470	*1470				*1510	*1510	13.68
(30.0 ft)	lb											*3240	*3240				*3330	*3330	(44.9)
7.5 m	kg									*1550	*1550	*1570	*1570				*1560	*1560	14.26
(25.0 ft)	lb									*3420	*3420	*3460	*3460				*3440	*3440	(46.8)
6.0 m	kg									*1720	*1720	*1670	*1670	*1150	*1150		*1610	*1610	14.65
(20.0 ft)	lb									*3790	*3790	*3680	*3680	*2540	*2540		*3550	*3550	(48.1)
4.5 m	kg							*2100	*2100	*1930	*1930	*1820	*1820	*1520	*1520		*1680	*1680	14.86
(15.0 ft)	lb							*4630	*4630	*4250	*4250	*4010	*4010	*3350	*3350		*3700	*3700	(48.8)
3.0 m	kg	*5160	*5160	*3670	*3670	*2910	*2910	*2460	*2460	*2170	*2170	*1980	*1980	*1750	*1750	*1750	*1750	*1750	14.92
(10.0 ft)	lb	*11380	*11380	*8090	*8090	*6420	*6420	*5420	*5420	*4780	*4780	*4370	*4370	*3860	*3860	*3860	*3860	*3860	(49.0)
1.5 m	kg	*6630	*6630	*4530	*4530	*3450	*3450	*2820	*2820	*2420	*2420	*2150	*2150	*1830	*1830	*1840	*1840	*1840	14.80
(5.0 ft)	lb	*14620	*14620	*9990	*9990	*7610	*7610	*6220	*6220	*5340	*5340	*4740	*4740	*4030	*4030	*4060	*4060	*4060	(48.0)
Ground	kg	*7580	*7580	*5200	*5200	*3910	*3910	*3150	*3150	*2650	*2650	*2310	*2310	*1660	*1660	1930	1930	1930	14.52
Line	lb	*16710	*16710	*11460	*11460	*8620	*8620	*6940	*6940	*5840	*5840	*5090	*5090	*3660	*3660	4250	4250	4250	(47.6)
-1.5 m	kg	*8080	*8080	*5640	*5640	*4260	*4260	*3400	*3400	*2830	*2830	*2430	*2430			2030	2030	2030	14.06
(-5.0 ft)	lb	*17810	*17810	*12430	*12430	*9390	*9390	*7500	*7500	*6240	*6240	*5360	*5360			4480	4480	4480	(46.1)
-3.0 m	kg	*8230	*8230	*5860	*5860	*4460	*4460	*3560	*3560	*2940	*2940	*2490	*2490			2150	2150	2150	13.41
(-10.0 ft)	lb	*18140	*18140	*12920	*12920	*9830	*9830	*7850	*7850	*6480	*6480	*5490	*5490			4740	4740	4740	(44.0)
1-4.5 m	kg	*8090	*8090	*5870	*5870	*4510	*4510	*3610	*3610	*2950	*2950					*2270	*2270	*2270	12.52
(-15.0 ft)	lb	*17840	*17840	*12940	*12940	*9940	*9940	*7960	*7960	*6500	*6500					*5000	*5000	*5000	(41.1)
-6.0 m	kg	*7660	*7660	*5640	*5640	*4370	*4370	*3480	*3480	*2790	*2790					*2400	*2400	*2400	11.33
(-20.0 ft)	lb	*16890	*16890	*12430	*12430	*9630	*9630	*7670	*7670	*6150	*6150					*5290	*5290	*5290	(37.2)
-7.5 m	kg	*6850	*6850	*5120	*5120	*3960	*3960	*3070	*3070										
(-25.0 ft)	lb	*15100	*15100	*11290	*11290	*8730	*8730	*6770	*6770										
-9.0 m	kg	*5460	*5460	*4080	*4080														
(-30.0 ft)	lb	*12040	*12040	*8990	*8990														

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. * indicates load limited by hydraulic capacity.

6. BUCKET SELECTION GUIDE

1) GENERAL BUCKET

		
0.51 m³ SAE heaped bucket	※0.92, ★0.52, 0.80, 0.87, 1.10, 1.20 m³ SAE heaped bucket	1.34 m³ SAE heaped bucket

Capacity		Width		Weight	Recommendation				
					5.68 m (18' 8") boom				8.2m (26' 11") boom
SAE heaped	CECE heaped	Without side cutter	With side cutter		2.0 m arm (6' 7")	2.4 m arm (7' 10")	2.92 m arm (9' 7")	3.90 m arm (12' 10")	6.3 m arm (20' 8")
0.51 m³ (0.67 yd³)	0.45 m³ (0.59 yd³)	700 mm (27.6")	820 mm (32.3")	570 kg (1260 lb)					
★0.52 m³ (0.68 yd³)	0.45 m³ (0.59 yd³)	935 mm (36.8")	1035 mm (40.7")	460 kg (1010 lb)					
0.80 m³ (1.05 yd³)	0.70 m³ (0.92 yd³)	1000 mm (39.4")	1120 mm (44.1")	770 kg (1700 lb)					
0.87 m³ (1.14 yd³)	0.75 m³ (0.98 yd³)	1090 mm (42.9")	1210 mm (47.6")	740 kg (1630 lb)					
※0.92 m³ (1.20 yd³)	0.80 m³ (1.05 yd³)	1150 mm (45.3")	1270 mm (50.0")	770 kg (1700 lb)					
1.10 m³ (1.44 yd³)	0.96 m³ (1.26 yd³)	1320 mm (52.0")	1440 mm (56.7")	830 kg (1830 lb)					
1.20 m³ (1.57 yd³)	1.00 m³ (1.31 yd³)	1400 mm (55.1")	1520 mm (59.8")	850 kg (1870 lb)					
1.34 m³ (1.75 yd³)	1.15 m³ (1.50 yd³)	1550 mm (61.0")	1670 mm (65.7")	920 kg (2030 lb)					

※ : Standard bucket




★ : Long reach bucket/Amphibious bucket

 Applicable for materials with density of 2000 kgf/m³ (3370 lbf/yd³) or less

 Applicable for materials with density of 1600 kgf/m³ (2700 lbf/yd³) or less

 Applicable for materials with density of 1100 kgf/m³ (1850 lbf/yd³) or less

2) HEAVY DUTY, ROCK-HEAVY DUTY AND SLOPE FINISHING BUCKET

Heavy duty bucket	Rock-heavy duty bucket	Slope finishing bucket
		
◆ 0.74, 0.90, 1.05 m³ SAE heaped bucket	⊙ 0.87, 1.20 m³ SAE heaped bucket	■ 0.75 m³ SAE heaped bucket

Capacity		Width		Weight	Recommendation			
					5.68 m (18' 8") boom			
SAE heaped	CECE heaped	Without side cutter	With side cutter		2.0 m arm (6' 7")	2.4 m arm (7' 10")	2.92 m arm (9' 7")	3.90 m arm (12' 10")
◆0.74 m³ (0.97 yd³)	0.65 m³ (0.85 yd³)	985 mm (38.8")	-	770 kg (1700 lb)				
◆0.90 m³ (1.18 yd³)	0.80 m³ (1.05 yd³)	1070 mm (42.0")	-	810 kg (1790 lb)				
◆1.05 m³ (1.37 yd³)	0.92 m³ (1.20 yd³)	1290 mm (50.8")	-	890 kg (1960 lb)				
⊙0.87 m³ (1.14 yd³)	0.75 m³ (0.98 yd³)	1140 mm (44.9")	-	900 kg (1980 lb)				
⊙1.20 m³ (1.57 yd³)	1.00 m³ (1.31 yd³)	1410 mm (55.5")	-	1030 kg (2270 lb)				
■0.75 m³ (0.98 yd³)	0.65 m³ (0.85 yd³)	1790 mm (70.5")	-	880 kg (1940 lb)				

◆ : Heavy duty bucket ⊙ : Rock-heavy duty bucket ■ : Slope finishing bucket

 Applicable for materials with density of 2000 kgf/m³ (3370 lbf/yd³) or less

 Applicable for materials with density of 1600 kgf/m³ (2700 lbf/yd³) or less


 Applicable for materials with density of 1100 kgf/m³ (1850 lbf/yd³) or less

7. UNDERCARRIAGE

1) TRACKS

X-leg type center frame is integrally welded with reinforced box-section track frames. The design includes dry tracks, lubricated rollers, idlers, sprockets, hydraulic track adjusters with shock absorbing springs and assembled track-type tractor shoes with triple grousers.

2) TYPES OF SHOES

Model	Shapes		Triple grouser			
						
R220LC-9S	Shoe width	mm (in)	600 (24)	700 (28)	800 (32)	900 (36)
	Operating weight	kg (lb)	21900 (48280)	22250 (49050)	22515 (49640)	22760 (50180)
	Ground pressure	kgf/cm ² (psi)	0.46 (6.54)	0.40 (5.69)	0.36 (5.12)	0.32 (4.55)
	Overall width	mm (ft-in)	2990 (9' 10")	3090 (10' 2")	3190 (10' 6")	3290 (10' 10")
R220LC-9S LONG REACH	Shoe width	mm (in)	-	-	800 (32)	-
	Operating weight	kg (lb)	-	-	24605 (54240)	-
	Ground pressure	kgf/cm ² (psi)	-	-	0.39 (5.55)	-
	Overall width	mm (ft-in)	-	-	3190 (10' 6")	-
R220LC-9S HIGH WALKER	Shoe width	mm (in)	600 (24)	700 (28)	800 (32)	710 (28)*
	Operating weight	kg (lb)	23360 (51500)	23710 (52270)	23975 (52860)	24220 (53400)
	Ground pressure	kgf/cm ² (psi)	0.50 (7.11)	0.43 (6.11)	0.38 (5.40)	0.43 (6.11)
	Overall width	mm (ft-in)	3395 (11' 2")	3495 (11' 6")	3595 (11' 10")	3505 (11' 6")

* : Double grouser

3) NUMBER OF ROLLERS AND SHOES ON EACH SIDE

Item	Quantity
Carrier rollers	2 EA
Track rollers	9 EA
Track shoes	49 EA

4) SELECTION OF TRACK SHOE

Suitable track shoes should be selected according to operating conditions.

Method of selecting shoes

Confirm the category from the list of applications in **table 2**, then use **table 1** to select the shoe. Wide shoes (categories B and C) have limitations on applications. Before using wide shoes, check the precautions, then investigate and study the operating conditions to confirm if these shoes are suitable.

Select the narrowest shoe possible to meet the required flotation and ground pressure. Application of wider shoes than recommendations will cause unexpected problem such as bending of shoes, crack of link, breakage of pin, loosening of shoe bolts and the other various problems.

※ **Table 1**

Track shoe	Specification	Category
600 mm triple grouser	Standard	A
700 mm triple grouser	Option	B
800 mm triple grouser	Option	C
800 mm triple grouser (long reach)	Standard	C
900 mm triple grouser	Option	C

※ **Table 2**

Category	Applications	Precautions
A	Rocky ground, river beds, normal soil	• Travel at low speed on rough ground with large obstacles such as boulders or fallen trees
B	Normal soil, soft ground	• These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees • Travel at high speed only on flat ground • Travel slowly at low speed if it is impossible to avoid going over obstacles
C	Extremely soft ground (swampy ground)	• Use the shoes only in the conditions that the machine sinks and it is impossible to use the shoes of category A or B • These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees • Travel at high speed only on flat ground • Travel slowly at low speed if it is impossible to avoid going over obstacles

8. SPECIFICATIONS FOR MAJOR COMPONENTS

1) ENGINE

Item	Specification
Model	Cummins 6BTAA / HYUNDAI HM 5.9
Type	4-cycle turbocharged diesel engine, low emission
Cooling method	Water cooling
Number of cylinders and arrangement	6 cylinders, in-line
Firing order	1-5-3-6-2-4
Combustion chamber type	Direct injection type
Cylinder bore × stroke	102 × 120 mm (4.02" × 4.72")
Piston displacement	5900 cc (360 cu in)
Compression ratio	17.3 : 1
Rated gross horse power (SAE J1995)	150 Hp at 1950 rpm (112 kW at 1950 rpm)
Maximum torque at 1500 rpm	62.6 kgf · m (453 lbf · ft)
Engine oil quantity	24 l (6.3 U.S. gal)
Dry weight	496 kg (1094 lb)
High idling speed	2150 ± 50 rpm
Low idling speed	1050 ± 100 rpm
Rated fuel consumption	164.8 g/Hp · hr at 1950 rpm
Starting motor	Nippon denso (24 V-4.5 kW)
Alternator	Delco Remy (24 V-90 A)
Battery	2 × 12 V × 100 Ah

2) MAIN PUMP

Item	Specification
Type	Variable displacement tandem axis piston pumps
Capacity	2 × 117cc/rev
Maximum pressure	350kgf/cm ² (4980psi) [380 kgf/cm ² (5400 psi)]
Rated oil flow	2 × 222 l /min (58.6U.S. gpm/ 48.8U.K. gpm)
Rated speed	1950 rpm

[] : Power boost

3) GEAR PUMP

Item	Specification
Type	Fixed displacement gear pump single stage
Capacity	15 cc/rev
Maximum pressure	40 kgf/cm ² (570 psi)
Rated oil flow	28.5 l/min (7.5 U.S. gpm/6.3 U.K. gpm)

4) MAIN CONTROL VALVE

Item		Specification	
		R220LC-9S	R220LC-9S Long reach & Amphibious
Type		9 spools two-block	
Operating method		Hydraulic pilot system	
Main relief valve pressure		350 kgf/cm ² (4980 psi) [380 kgf/cm ² (5400 psi)]	350 kgf/cm ² (4980 psi)
Port relief valve pressure	Boom	400 kgf/cm ² (5690 psi)	
	Arm	400 kgf/cm ² (5690 psi)	300 kgf/cm ² (4270 psi)
	Bucket	400 kgf/cm ² (5690 psi)	280 kgf/cm ² (3980 psi)

[]: Power boost

5) SWING MOTOR

Item	Specification	
	Type 1	Type 2, 3
Type	Fixed displacement axial piston motor	
Capacity	151 cc/rev	142.8 cc/rev
Relief pressure (working pressure)	265 kgf/cm ² (3770 psi)	
Braking system	Automatic, spring applied hydraulic released	
Braking torque	59 kgf · m (427 lbf · ft)	58 kgf · m (420 lbf · ft)
Brake release pressure	33~50 kgf/cm ² (470~711 psi)	21.3~35.6 kgf/cm ² (154~257 psi)
Reduction gear type	2 - stage planetary	

6) TRAVEL MOTOR

Item	Specification
Type	Variable displacement axial piston motor
Relief pressure	350 kgf/cm ² (4980 psi)
Reduction gear type	2-stage planetary
Braking system	Automatic, spring applied hydraulic released
Brake release pressure	11 kgf/cm ² (156 psi)
Braking torque	49.3 kgf · m (357 lbf · ft)

7) REMOTE CONTROL VALVE

Item		Specification
Type		Pressure reducing type
Operating pressure	Minimum	6.5 kgf/cm ² (92 psi)
	Maximum	25 kgf/cm ² (356 psi)
Single operation stroke	Lever	90 mm (3.5 in)
	Pedal	130 mm (4.4 in)

8) CYLINDER

Item		Specification
Boom cylinder	Bore dia × Rod dia × Stroke	∅ 120 × ∅ 85 × 1290 mm
	Cushion	Extend only
Arm cylinder	Bore dia × Rod dia × Stroke	∅ 140 × ∅ 100 × 1510 mm # ∅ 140 × ∅ 100 × 1460 mm
	Cushion	Extend and retract
Bucket cylinder	Bore dia × Rod dia × Stroke	∅ 120 × ∅ 85 × 1055 mm # ∅ 100 × ∅ 70 × 870 mm
	Cushion	Extend only

※ Discoloration of cylinder rod can occur when the friction reduction additive of lubrication oil spreads on the rod surface.

※ Discoloration does not cause any harmful effect on the cylinder performance.

: LONG REACH

9) SHOE

Item		Width	Ground pressure	Link quantity	Overall width
R220LC-9S	Standard	600 mm (24")	0.46 kgf/cm ² (6.54 psi)	49	2990 mm (9' 10")
	Option	700 mm (28")	0.40 kgf/cm ² (5.69 psi)	49	3090 mm (10' 2")
		800 mm (32")	0.36 kgf/cm ² (5.12 psi)	49	3190 mm (10' 6")
		900 mm (36")	0.32 kgf/cm ² (4.55 psi)	49	3290 mm (10' 10")
R220LC-9S LONG REACH	Standard	800 mm (32")	0.39 kgf/cm ² (5.55 psi)	49	3190 mm (10' 6")
R220LC-9S HIGH WALKER	Standard	600 mm (24")	0.50 kgf/cm ² (7.11 psi)	49	3395 mm (11' 2")
	Option	700 mm (28")	0.43 kgf/cm ² (6.11 psi)	49	3495 mm (11' 6")
		800 mm (32")	0.38 kgf/cm ² (5.40 psi)	49	3595 mm (11' 10")
		※ 710 mm (28")	0.43 kgf/cm ² (6.11 psi)	49	3505 mm (11' 6")

※ : Double grouser

10) BUCKET

Item	Capacity		Tooth quantity	Width	
	SAE heaped	CECE heaped		Without side cutter	With side cutter
R220LC-9S	0.51 m ³ (0.67 yd ³)	0.45 m ³ (0.59 yd ³)	3	700 mm (27.6")	820 mm (32.3")
	0.80 m ³ (1.05 yd ³)	0.70 m ³ (0.92 yd ³)	5	1000 mm (39.4")	1120 mm (44.1")
	0.87 m ³ (1.14 yd ³)	0.75 m ³ (0.98 yd ³)	5	1090 mm (42.9")	1210 mm (47.6")
	0.92 m ³ (1.20 yd ³)	0.80 m ³ (1.05 yd ³)	5	1150 mm (45.3")	1270 mm (50.0")
	1.10 m ³ (1.44 yd ³)	0.96 m ³ (1.26 yd ³)	5	1320 mm (52.0")	1440 mm (56.7")
	1.20 m ³ (1.57 yd ³)	1.00 m ³ (1.31 yd ³)	5	1400 mm (55.1")	1520 mm (59.8")
	1.34 m ³ (1.75 yd ³)	1.15 m ³ (1.50 yd ³)	6	1550 mm (61.0")	1670 mm (65.7")
	★0.52 m ³ (0.68 yd ³)	0.45 m ³ (0.59 yd ³)	5	935 mm (36.8")	1035 mm (40.7")
	◆0.74 m ³ (0.97 yd ³)	0.65 m ³ (0.85 yd ³)	5	985 mm (38.8")	-
	◆0.90 m ³ (1.18 yd ³)	0.80 m ³ (1.05 yd ³)	5	1070 mm (42.0")	-
	◆1.05 m ³ (1.37 yd ³)	0.92 m ³ (1.20 yd ³)	5	1290 mm (50.8")	-
	⊙0.87 m ³ (1.14 yd ³)	0.75 m ³ (0.98 yd ³)	5	1140 mm (44.9")	-
	⊙1.20 m ³ (1.57 yd ³)	1.00 m ³ (1.31 yd ³)	5	1410 mm (55.5")	-
	■0.75 m ³ (0.98 yd ³)	0.65 m ³ (0.85 yd ³)	-	1790 mm (70.5")	-

★ : Long reach bucket/Amphibious bucket

◆ : Heavy duty bucket

⊙ : Rock-heavy duty bucket

■ : Slope finishing bucket

9. RECOMMENDED OILS

Use only oils listed below. Do not mix different brand oil.

Please use HYUNDAI genuine oil and grease.

Service point	Kind of fluid	Capacity ℓ (U.S. gal)	Ambient temperature °C (°F)								
			-50 (-58)	-30 (-22)	-20 (-4)	-10 (14)	0 (32)	10 (50)	20 (68)	30 (86)	40 (104)
Engine oil pan	Engine oil	24 (6.3)	★SAE 5W-40								
								SAE 30			
								SAE 10W			
								SAE 10W-30			
								SAE 15W-40			
Swing drive	Gear oil	Type 1 : 5.0(1.3) Type 2,3 : 6.2(1.64)	★SAE 75W-90								
Final drive		5.8 × 2 (1.5 × 2)						SAE 80W-90			
Hydraulic tank	Hydraulic oil	Tank; 160 (42) System; 275 (73)	★ISO VG 15								
									ISO VG 32		
									ISO VG 46		
								ISO VG 68			
Fuel tank	Diesel fuel	400 (106)	★ASTM D975 NO.1								
									ASTM D975 NO.2		
Fitting (grease nipple)	Grease	As required	★NLGI NO.1								
									NLGI NO.2		
Radiator (reservoir tank)	Mixture of antifreeze and soft water★ ¹	35 (9.2)	Ethylene glycol base permanent type (50 : 50)								
			★Ethylene glycol base permanent type (60 : 40)								

SAE : Society of Automotive Engineers

API : American Petroleum Institute

ISO : International Organization for Standardization

NLGI : National Lubricating Grease Institute

ASTM : American Society of Testing and Material

★¹ : Soft water

City water or distilled water

★ : Cold region

Russia, CIS, Mongolia