


2. SPECIFICATIONS


1) R250LC-7A

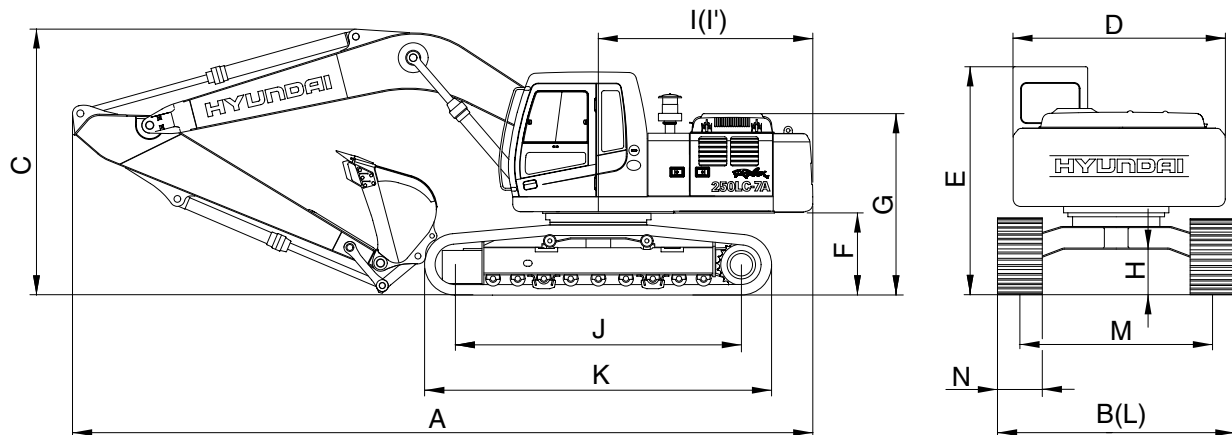

2507A2SP01

Description		Unit	Specification
Operating weight		kg(lb)	25200(55600)
Bucket capacity(SAE heaped), standard		m³(yd³)	1.08(1.41)
Overall length	A	mm(ft-in)	9920(32' 7")
Overall width, with 600mm shoe	B		3180(10' 5")
Overall height	C		3220(10' 7")
Superstructure width	D		2840(9' 4")
Overall height of cab	E		2990(9' 10")
Ground clearance of counterweight	F		1115(3' 8")
Engine cover height	G		2427(7' 12")
Minimum ground clearance	H		480(1' 7")
Rear-end distance	I		2870(9' 5")
Rear-end swing radius	I'		2965(9' 9")
Distance between tumblers	J		3830(12' 7")
Undercarriage length	K		4640(15' 3")
Undercarriage width	L		3180(10' 5")
Track gauge	M		2580(8' 6")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.5/5.5(2.2/3.4)
Swing speed		rpm	12
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm²(psi)	0.51(7.25)


2) R250NLC-7A

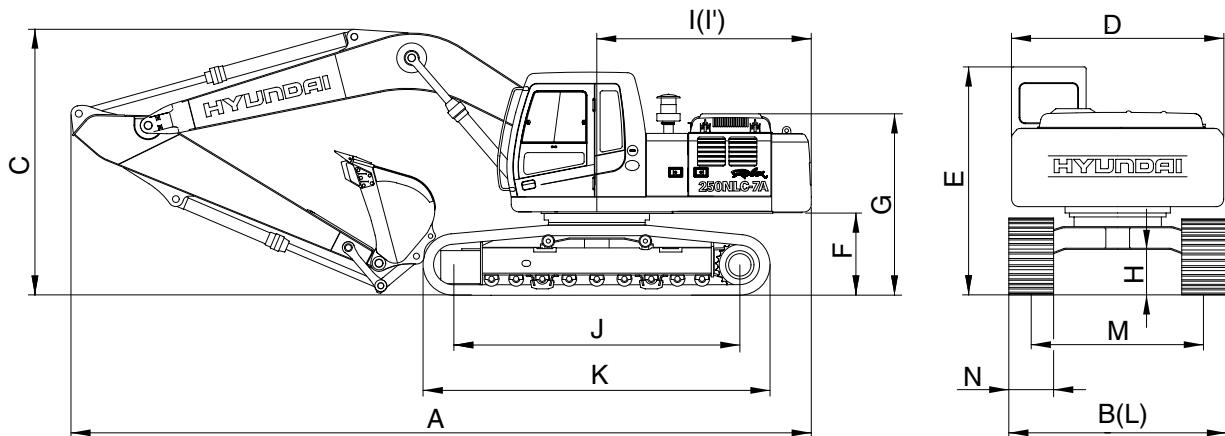

2507A2SP02

Description		Unit	Specification
Operating weight		kg(lb)	25100(55300)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	1.08(1.41)
Overall length	A	mm(ft-in)	9920(32' 7")
Overall width, with 600mm shoe	B		2980(9' 9")
Overall height	C		3220(10' 7")
Superstructure width	D		2840(9' 4")
Overall height of cab	E		2990(9' 10")
Ground clearance of counterweight	F		1115(3' 8")
Engine cover height	G		2427(7' 12")
Minimum ground clearance	H		480(1' 7")
Rear-end distance	I		2870(9' 5")
Rear-end swing radius	I'		2965(9' 9")
Distance between tumblers	J		3830(12' 7")
Undercarriage length	K		4640(15' 3")
Undercarriage width	L		2980(9' 9")
Track gauge	M		2380(7' 10")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.5/5.5(2.2/3.4)
Swing speed		rpm	12
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.51(7.25)

3) R250LC-7A HIGH WALKER

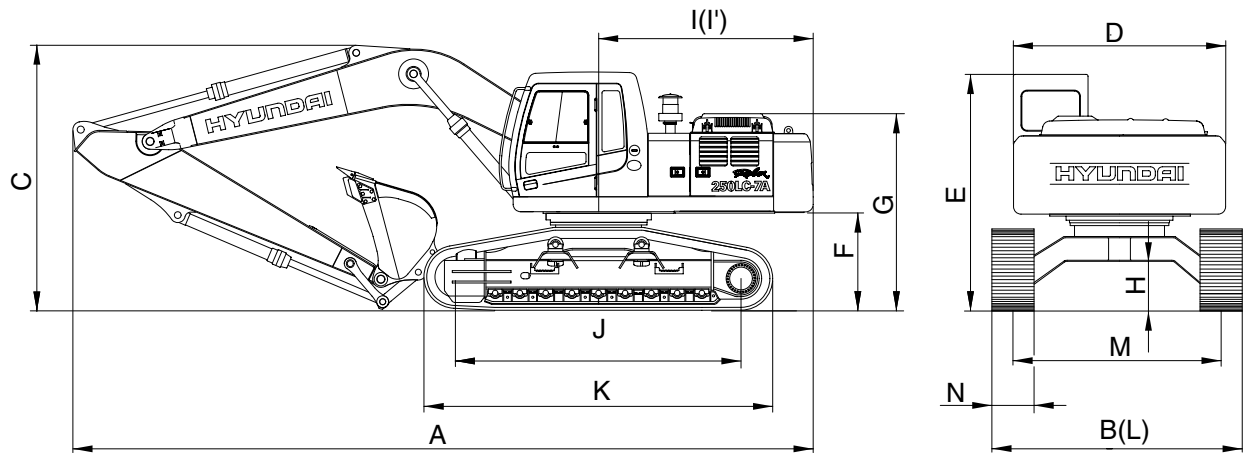

2507A2SP03

Description		Unit	Specification
Operating weight		kg(lb)	27450(60520)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	1.08(1.41)
Overall length	A	mm(ft-in)	9760(32' 0")
Overall width, with 600mm shoe	B		3390(11' 1")
Overall height	C		3240(10' 8")
Superstructure width	D		2840(9' 4")
Overall height of cab	E		3345(11' 0")
Ground clearance of counterweight	F		1470(4' 10")
Engine cover height	G		2782(9' 2")
Minimum ground clearance	H		765(2' 6")
Rear-end distance	I		2965(9' 9")
Rear-end swing radius	I'		2870(9' 5")
Distance between tumblers	J		4030(13' 3")
Undercarriage length	K		4940(16' 2")
Undercarriage width	L		3390(11' 1")
Track gauge	M		2790(9' 2")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.5/5.5(2.2/3.4)
Swing speed		rpm	12
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.53(7.54)