


## 2. SPECIFICATIONS

### 1) 6.25m(20'6") MONO BOOM, 3.05(10'0")ARM

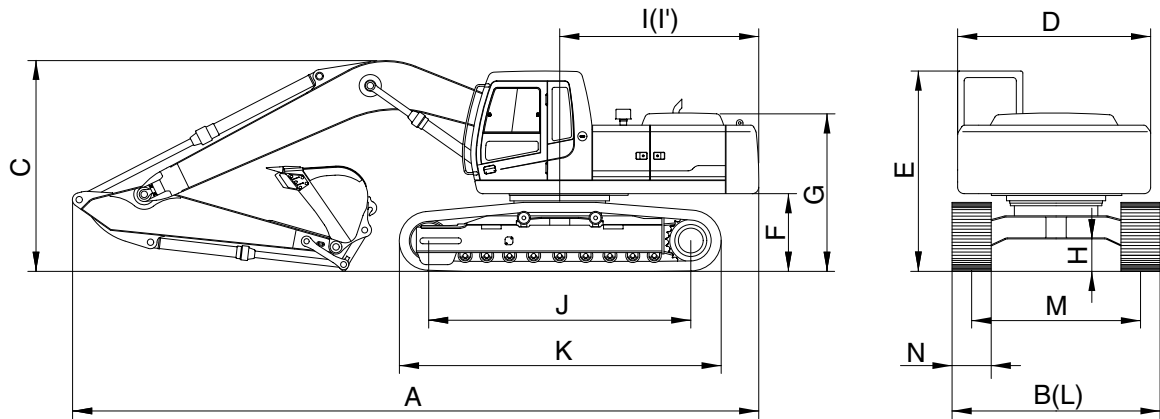

29072SP01

Description		Unit	Specification
Operating weight		kg(lb)	28800(63500)
Bucket capacity(PCSA heaped), standard		m <sup>3</sup> (yd <sup>3</sup> )	1.27(1.66)
Overall length	A	mm(ft-in)	10560(34' 8")
Overall width, with 600mm shoe	B		3200(10' 6")
Overall height	C		3290(10' 10")
Superstructure width	D		2980( 9' 9")
Overall height of cab	E		3010( 9' 11")
Ground clearance of counterweight	F		1190( 3' 11")
Engine cover height	G		3190(10' 6")
Minimum ground clearance	H		500( 1' 8")
Rear-end distance	I		3200(10' 6")
Rear-end swing radius	I'		3120(10' 3")
Distance between tumblers	J		4030(13' 3")
Undercarriage length	K		4940(16' 2")
Undercarriage width	L		3200(10' 6")
Track gauge	M		2600( 8' 6")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.08/5.44(1.9/3.4)
Swing speed		rpm	10.3
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm <sup>2</sup> (psi)	0.55(7.82)