


2. DIMENSION AND WEIGHT

1) R290LC-7

(1) BASE MACHINE

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	5555(18' 3")
H	Height	mm(ft-in)	3010(9' 11")
W	Width	mm(ft-in)	3200(10' 6")
Wt	Weight	kg(lb)	23190(51125)


※ With 600mm(24") triple grouser shoes and 4700kg (10360lb) counterweight.

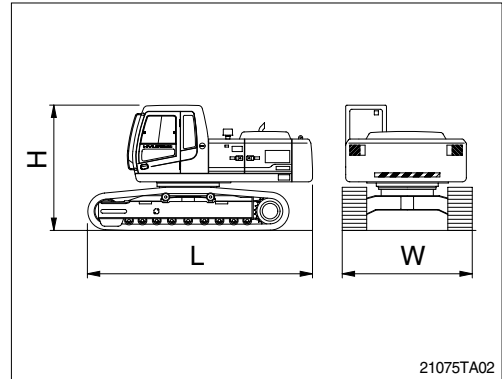

(2) BOOM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	6470(21' 3")
H	Height	mm(ft-in)	1730(5' 8")
W	Width	mm(ft-in)	790(2' 7")
Wt	Weight	kg(lb)	2620(5780)


※ 6.25m(20' 6") boom with arm cylinder(Included piping and pins).

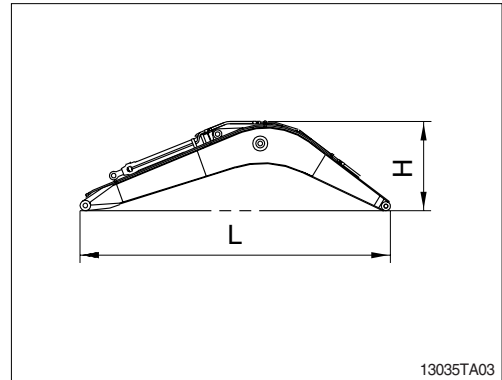

(3) ARM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4190(13' 9")
H	Height	mm(ft-in)	950(3' 1")
W	Width	mm(ft-in)	630(2' 1")
Wt	Weight	kg(lb)	1520(3351)

※ 3.05m(10' 0") arm with bucket cylinder(Included linkage and pins).

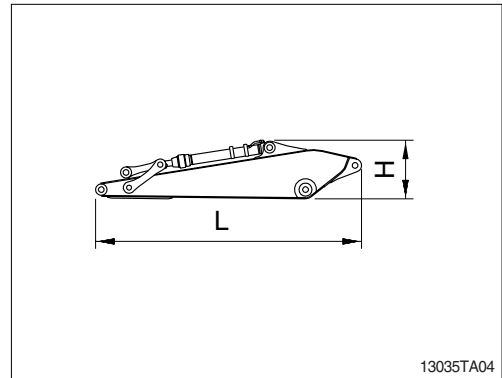

(4) BUCKET ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1780(5' 10")
H	Height	mm(ft-in)	1070(3' 6")
W	Width	mm(ft-in)	1410(4' 8")
Wt	Weight	kg(lb)	960(2120)

※ 1.27m³(1.66yd³) PCSA heaped bucket(Included tooth and side cutters).

