


2. SPECIFICATIONS

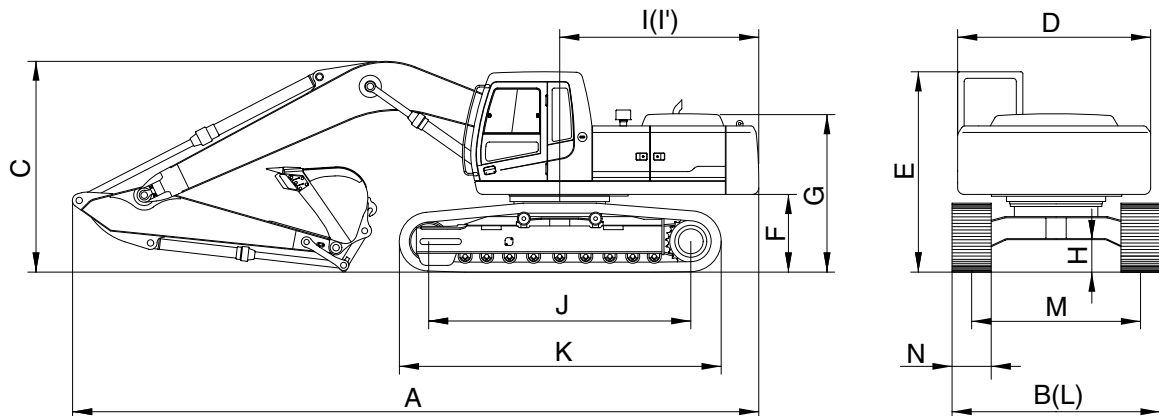

29072SP01

| Description | | Unit | Specification |
|--|----|-----------------------------------|------------------|
| Operating weight | | kg(lb) | 32200(70990) |
| Bucket capacity(PCSA heaped), standard | | m ³ (yd ³) | 1.44(1.88) |
| Overall length | A | mm(ft-in) | 10980(36' 0") |
| Overall width, with 600mm shoe | B | | 3280(10' 9") |
| Overall height | C | | 3380(11' 1") |
| Superstructure width | D | | 2980(9' 9") |
| Overall height of cab | E | | 3110(10' 2") |
| Ground clearance of counterweight | F | | 1200(3' 11") |
| Engine cover height | G | | 2580(8' 6") |
| Minimum ground clearance | H | | 500(1' 8") |
| Rear-end distance | I | | 3265(10' 9") |
| Rear-end swing radius | I' | | 3330(10' 11") |
| Distance between tumblers | J | | 4030(13' 3") |
| Undercarriage length | K | | 4940(16' 2") |
| Undercarriage width | L | | 3280(10' 9") |
| Track gauge | M | | 2680(8' 10") |
| Track shoe width, standard | N | | 600(23.6") |
| Travel speed(Low/high) | | km/hr(mph) | 3.2/5.4(2.0/3.4) |
| Swing speed | | rpm | 9.1 |
| Gradeability | | Degree(%) | 35(70) |
| Ground pressure(600mm shoe) | | kgf/cm ² (psi) | 0.62(8.82) |