


2. SPECIFICATIONS


1) R320LC-7A

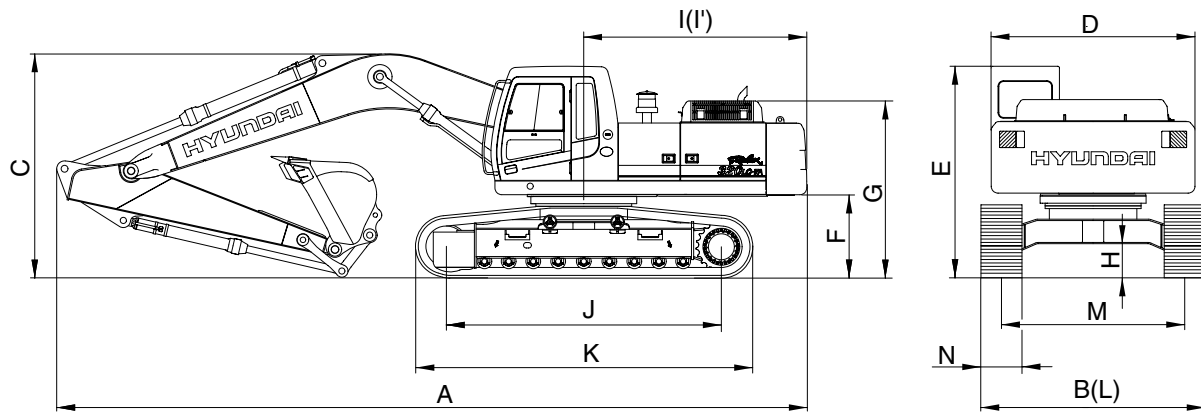

3207A2SP01

Description		Unit	Specification
Operating weight		kg(lb)	32200(70990)
Bucket capacity(PCSA heaped), standard		m³(yd³)	1.44(1.88)
Overall length	A	mm(ft-in)	10980(36' 0")
Overall width, with 600mm shoe	B		3280(10' 9")
Overall height	C		3380(11' 1")
Superstructure width	D		2980(9' 9")
Overall height of cab	E		3090(10' 2")
Ground clearance of counterweight	F		1200(3' 11")
Engine cover height	G		2580(8' 6")
Minimum ground clearance	H		500(1' 8")
Rear-end distance	I		3265(10' 9")
Rear-end swing radius	I'		3330(10' 11")
Distance between tumblers	J		4030(13' 3")
Undercarriage length	K		4940(16' 2")
Undercarriage width	L		3280(10' 9")
Track gauge	M		2680(8' 10")
Track shoe width, standard	N		600(23.6")
Travel speed(Low/high)		km/hr(mph)	3.1/5.3(2.0/3.4)
Swing speed		rpm	9.1
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm²(psi)	0.62(8.82)


2) R320NLC-7A

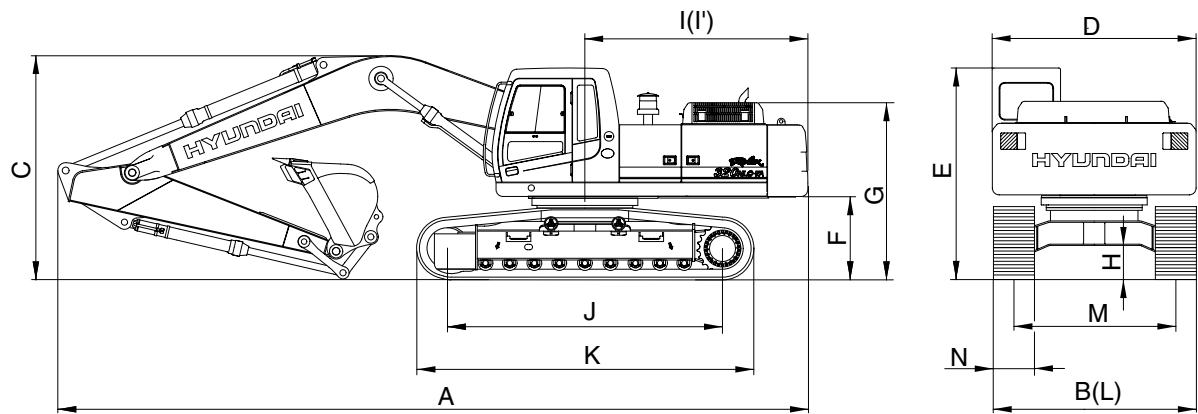

3207A2SP02

Description		Unit	Specification
Operating weight		kg(lb)	32000(70500)
Bucket capacity(PCSA heaped), standard		m ³ (yd ³)	1.44(1.88)
Overall length	A	mm(ft-in)	10980(36' 0")
Overall width, with 600mm shoe	B		2990(9' 10")
Overall height	C		3380(11' 1")
Superstructure width	D		2980(9' 9")
Overall height of cab	E		3090(10' 2")
Ground clearance of counterweight	F		1200(3' 11")
Engine cover height	G		2580(8' 6")
Minimum ground clearance	H		500(1' 8")
Rear-end distance	I		3265(10' 9")
Rear-end swing radius	I'		3330(10' 11")
Distance between tumblers	J		4030(13' 3")
Undercarriage length	K		4940(16' 2")
Undercarriage width	L		2990(9' 10")
Track gauge	M		2390(7' 10")
Track shoe width, standard	N		600(23.6")
Travel speed(Low/high)		km/hr(mph)	3.1/5.3(2.0/3.4)
Swing speed		rpm	9.1
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.61(8.67)

3) R320LC-7A HIGH WALKER

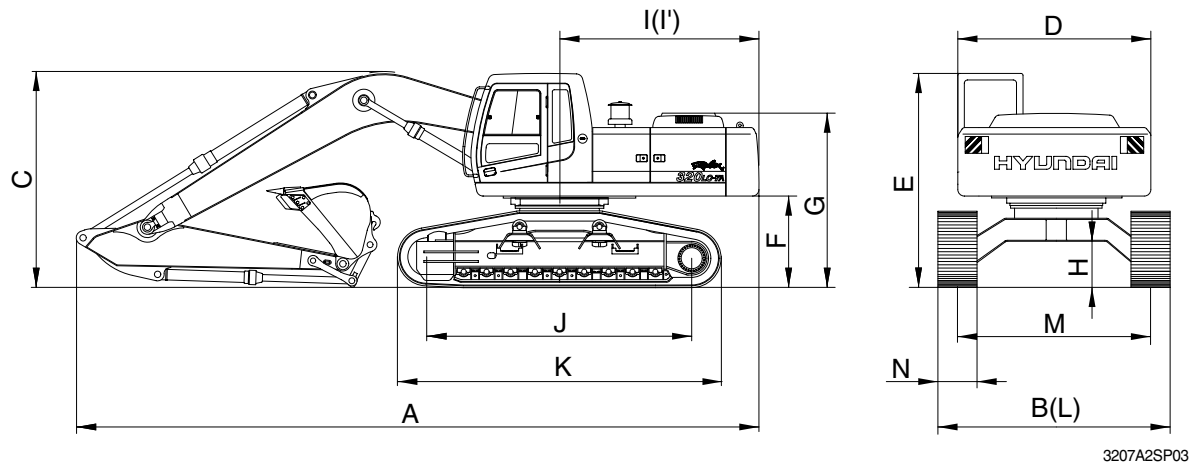

Description		Unit	Specification
Operating weight		kg(lb)	34700(76500)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	1.44(1.88)
Overall length	A	mm(ft-in)	10910(35' 10")
Overall width, with 600mm shoe	B		3470(11' 5")
Overall height	C		3360(11' 0")
Superstructure width	D		2980(9' 9")
Overall height of cab	E		3390(11' 1")
Ground clearance of counterweight	F		1500(4' 11")
Engine cover height	G		2880(9' 5")
Minimum ground clearance	H		765(2' 6")
Rear-end distance	I		3265(10' 9")
Rear-end swing radius	I'		3330(10' 11")
Distance between tumblers	J		4030(13' 3")
Undercarriage length	K		4940(16' 2")
Undercarriage width	L		3470(11' 5")
Track gauge	M		2870(9' 5")
Track shoe width, standard	N		600(23.6")
Travel speed(Low/high)		km/hr(mph)	3.1/5.3(2.0/3.4)
Swing speed		rpm	9.1
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.67(9.53)