


2. SPECIFICATIONS

1) 2.5m(8' 2") MONO BOOM, 1.3m(4' 3") ARM, WITH BOOM SWING POST

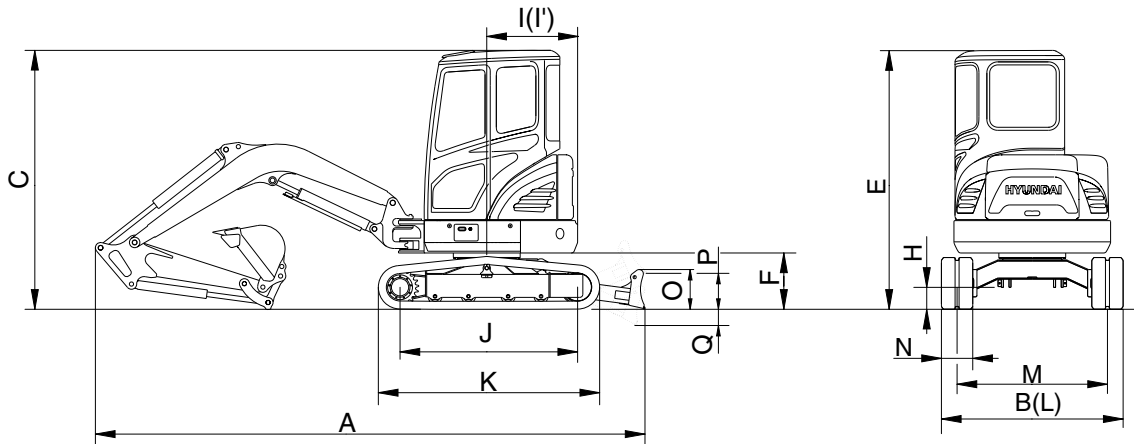

R35Z72SP02

Description		Unit	Specification
Operating weight		kg(lb)	3650(8050)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.11(0.14)
Overall length	A	mm(ft-in)	4790(15' 9")
Overall width, with 300mm shoe	B		1740(5' 9")
Overall height	C		2500(8' 2")
Overall height of cab	E		2500(8' 2")
Ground clearance of counterweight	F		540(1' 9")
Minimum ground clearance	H		290(0' 11")
Rear-end distance	I		870(2' 10")
Rear-end swing radius	I'		870(2' 10")
Distance between tumblers	J		1700(5' 7")
Undercarriage length	K		2130(7' 0")
Undercarriage width	L		1740(5' 9")
Track gauge	M		1440(4' 9")
Track shoe width, standard	N		300(1' 0")
Height of blade	O		370(1' 3")
Ground clearance of blade up	P		375(1' 3")
Depth of blade down	Q		390(1' 3")
Travel speed(Low/high)		km/hr(mph)	2.5/4.5(1.6/2.8)
Swing speed		rpm	9.5
Gradeability		Degree(%)	30(58)
Ground pressure(300mm shoe)		kgf/cm ² (psi)	0.34(4.83)