


2. DIMENSION AND WEIGHT

1) ROBEX 35Z-7A

(1) Base machine

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2550(8' 4")
H	Height	mm(ft-in)	2500(8' 2")
Wd	Width	mm(ft-in)	1740(5' 9")
Wt	Weight	kg(lb)	3260(7190)


※ With 300mm(12") rubber shoes and 420kg (925lb) counterweight.

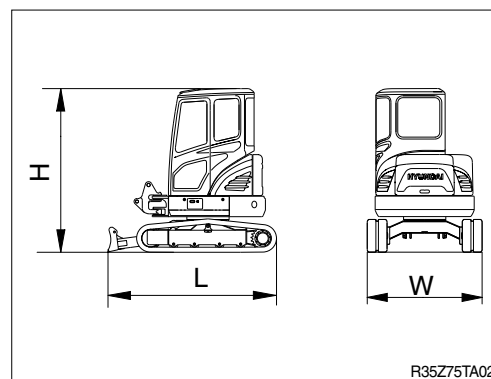

(2) Boom assembly

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2610(8' 7")
H	Height	mm(ft-in)	850(2' 9")
Wd	Width	mm(ft-in)	280(11")
Wt	Weight	kg(lb)	175(386)


※ 2.5m(8' 2") boom with arm cylinder(Included piping and pins).

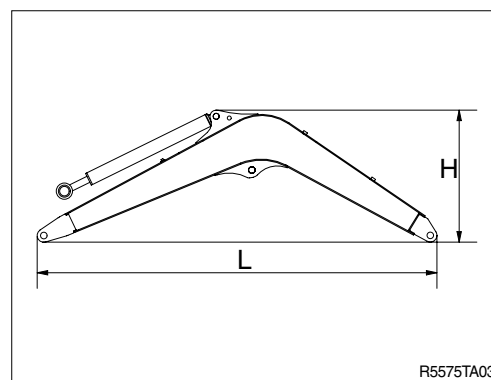

(3) Arm assembly

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1690(5' 7")
H	Height	mm(ft-in)	510(1' 8")
Wd	Width	mm(ft-in)	170(7")
Wt	Weight	kg(lb)	118(260)


※ 1.3m(4' 3") arm with bucket cylinder(Included linkage and pins).

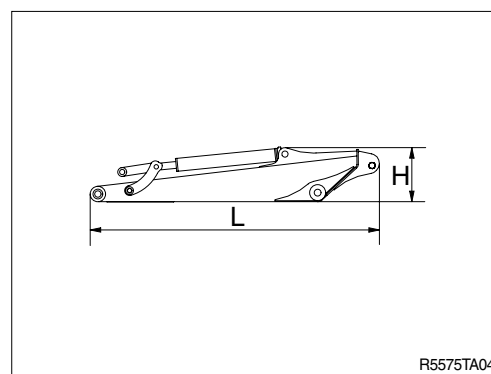

(4) Bucket assembly

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	790(2' 7")
H	Height	mm(ft-in)	500(1' 8")
Wd	Width	mm(ft-in)	610(2' 0")
Wt	Weight	kg(lb)	80(176)


※ 0.11m³(0.14yd³) SAE heaped bucket(Included tooth and side cutters).

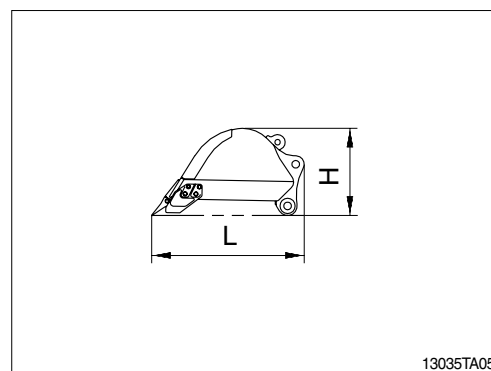

(5) Boom cylinder


Mark	Description	Unit	Specification
L	Length	mm(ft-in)	990(3' 3")
H	Height	mm(ft-in)	120(5")
Wd	Width	mm(ft-in)	250(10")
Wt	Weight	kg(lb)	35(80)

※ Included piping.

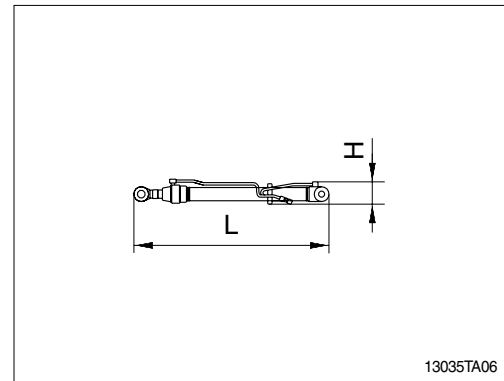


(6) Cab assembly

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1300(4' 3")
H	Height	mm(ft-in)	1620(5' 4")
Wd	Width	mm(ft-in)	1110(3' 8")
Wt	Weight	kg(lb)	230(507)

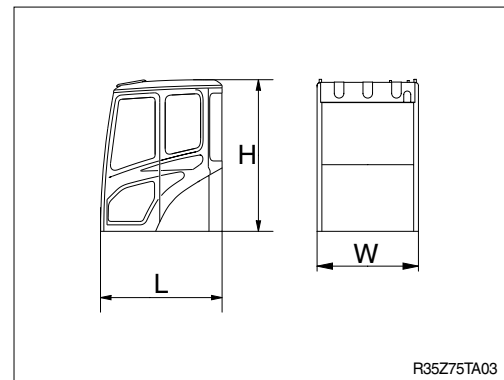

(7) Canopy assembly

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1590(5' 3")
H	Height	mm(ft-in)	1240(4' 1")
Wd	Width	mm(ft-in)	935(3' 1")
Wt	Weight	kg(lb)	92(203)

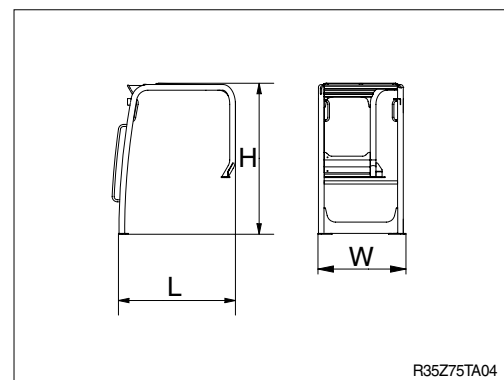

(8) Counterweight

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1430(4' 8")
H	Height	mm(ft-in)	310(12")
Wd	Width	mm(ft-in)	565(1' 10")
Wt	Weight	kg(lb)	420(925)

