


2. SPECIFICATIONS

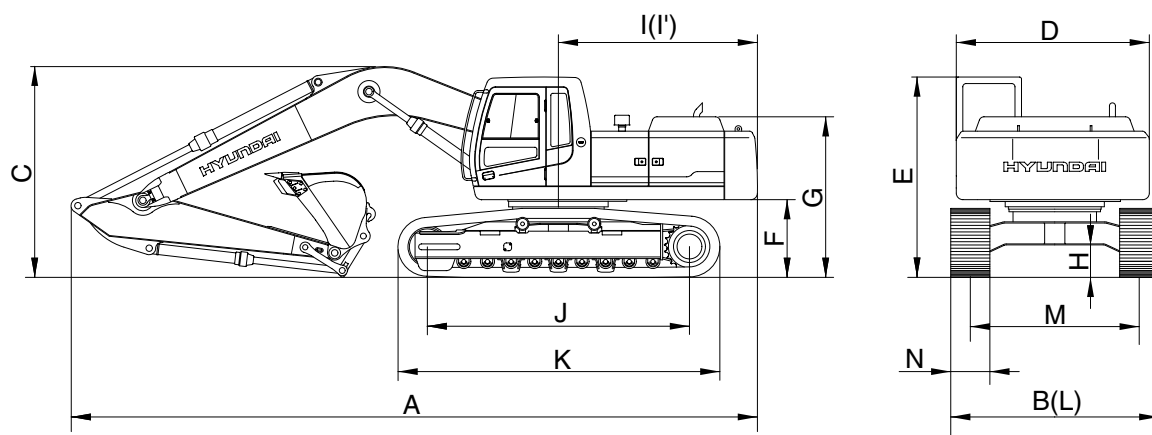

36072SP01

Description		Unit	Specification
Operating weight		kg(lb)	36100(79590)
Bucket capacity(PCSA heaped), standard		m³(yd³)	1.62(2.12)
Overall length	A	mm(ft-in)	11120(36' 6")
Overall width, with 600mm shoe	B		3440(11' 3")
Overall height	C		3440(11' 3")
Superstructure width	D		2980(9' 9")
Overall height of cab	E		3175(10' 5")
Ground clearance of counterweight	F		1290(4' 3")
Engine cover height	G		3190(10' 6")
Minimum ground clearance	H		550(1' 10")
Rear-end distance	I		3350(11' 1")
Rear-end swing radius	I'		3415(11' 2")
Distance between tumblers	J		4340(14' 3")
Undercarriage length	K		5280(17' 4")
Undercarriage width	L		3340(11' 0")
Track gauge	M		2740(9' 0")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.2/4.5(2.0/2.8)
Swing speed		rpm	9.1
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm²(psi)	0.64(9.10)