


2. SPECIFICATIONS


1) 6.5m(21' 4") BOOM, 2.50m(8' 2") ARM

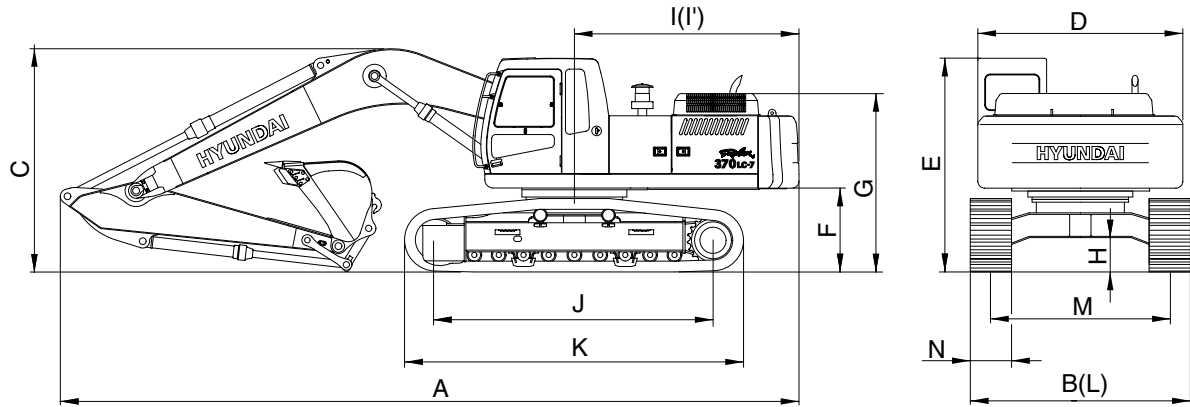

37072SP01


Description		Unit	Specification
Operating weight		kg(lb)	36900(81350)
Bucket capacity(SAE heaped), rock bucket		m ³ (yd ³)	1.62(2.12)
Overall length	A	mm(ft-in)	11290(37' 0")
Overall width, with 600mm shoe	B		3340(10' 11")
Overall height	C		3700(12' 2")
Superstructure width	D		2980(9' 9")
Overall height of cab	E		3175(10' 5")
Ground clearance of counterweight	F		1290(4' 3")
Engine cover height	G		3190(10' 6")
Minimum ground clearance	H		550(1' 10")
Rear-end distance	I		3350(11' 1")
Rear-end swing radius	I'		3400(11' 2")
Distance between tumblers	J		4340(14' 3")
Undercarriage length	K		5280(17' 4")
Undercarriage width	L		3340(11' 0")
Track gauge	M		2740(9' 0")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.2/5.0(2.0/3.1)
Swing speed		rpm	9.7
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.66(9.39)

2) 6.15m(20' 2") BOOM, 2.50m(8' 2") ARM

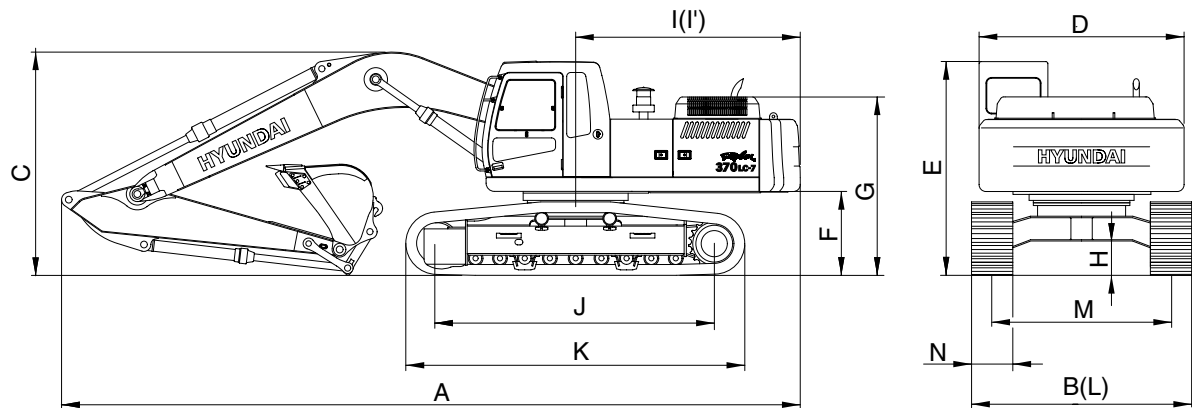

Description		Unit	Specification
Operating weight		kg(lb)	36770(81060)
Bucket capacity(SAE heaped), rock bucket		m ³ (yd ³)	1.62(2.12)
Overall length	A	mm(ft-in)	10930(35' 10")
Overall width, with 600mm shoe	B		3340(10' 11")
Overall height	C		3830(12' 7")
Superstructure width	D		2980(9' 9")
Overall height of cab	E		3175(10' 5")
Ground clearance of counterweight	F		1290(4' 3")
Engine cover height	G		3190(10' 6")
Minimum ground clearance	H		550(1' 10")
Rear-end distance	I		3350(11' 1")
Rear-end swing radius	I'		3400(11' 2")
Distance between tumblers	J		4340(14' 3")
Undercarriage length	K		5280(17' 4")
Undercarriage width	L		3340(11' 0")
Track gauge	M		2740(9' 0")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.2/5.0(2.0/3.1)
Swing speed		rpm	9.7
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.66(9.38)

3) 8.6m(28' 3") BOOM, 5.1m(16' 9") ARM

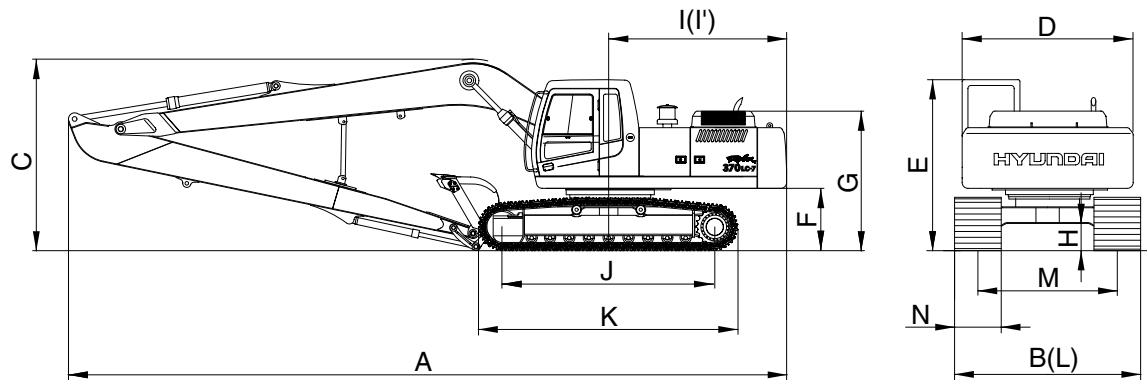

37072SP02

Description		Unit	Specification
Operating weight		kg(lb)	38020(83820)
Bucket capacity(SAE heaped), bucket		m ³ (yd ³)	1.46(1.91)
Overall length	A	mm(ft-in)	13120(43' 0")
Overall width, with 600mm shoe	B		3340(10' 11")
Overall height	C		4830(15' 10")
Superstructure width	D		2980(9' 9")
Overall height of cab	E		3175(10' 5")
Ground clearance of counterweight	F		1290(4' 3")
Engine cover height	G		3190(10' 6")
Minimum ground clearance	H		550(1' 10")
Rear-end distance	I		3350(11' 1")
Rear-end swing radius	I'		3400(11' 2")
Distance between tumblers	J		4340(14' 3")
Undercarriage length	K		5280(17' 4")
Undercarriage width	L		3340(11' 0")
Track gauge	M		2740(9' 0")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.2/5.0(2.0/3.1)
Swing speed		rpm	9.7
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.68(9.67)