


2. DIMENSION AND WEIGHT

1) BASE MACHINE

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	6396(21' 0")
H	Height	mm(ft-in)	3230(10' 7")
W	Width	mm(ft-in)	3340(10' 11")
Wt	Weight	kg(lb)	35790(78900)


※ With 600mm(24") triple grouser shoes and 9200kg (20280lb) counterweight.

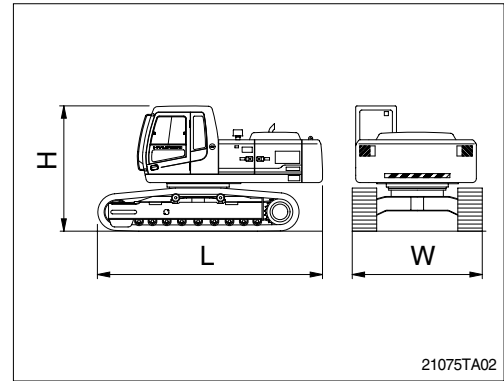

2) BOOM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	7290(23' 11")
H	Height	mm(ft-in)	1710(5' 7")
W	Width	mm(ft-in)	830(2' 9")
Wt	Weight	kg(lb)	3910(8620)


※ 7.06m(23' 2") boom with arm cylinder(Included piping and pins).

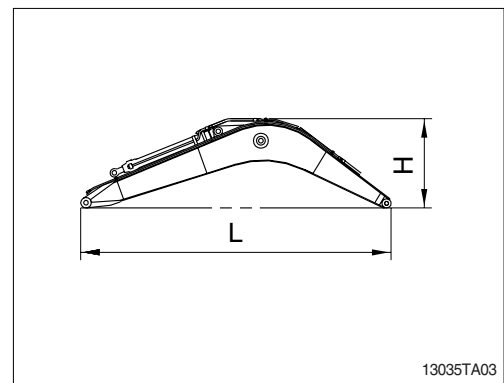

3) ARM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4600(15' 1")
H	Height	mm(ft-in)	1010(3' 4")
W	Width	mm(ft-in)	620(2' 0")
Wt	Weight	kg(lb)	2100(4630)


※ 3.38m(11' 0") arm with bucket cylinder(Included linkage and pins).

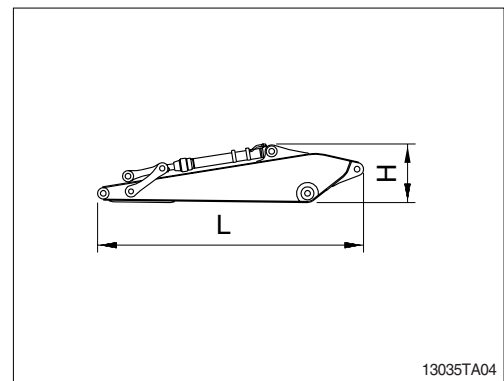

4) BUCKET ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2090(6' 10")
H	Height	mm(ft-in)	1240(4' 1")
W	Width	mm(ft-in)	1760(5' 6")
Wt	Weight	kg(lb)	1620(3570)


※ 2.15m³(2.81yd³) PCSA heaped bucket(Included tooth and side cutters).

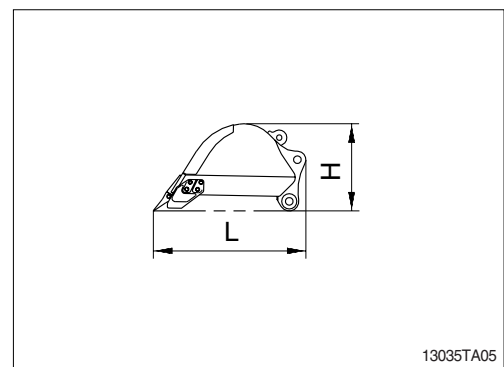

5) BOOM CYLINDER


Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2445(8' 0")
H	Height	mm(ft-in)	326(1' 1")
W	Width	mm(ft-in)	436(1' 5")
Wt	Weight(2EA)	kg(lb)	370(820)

※ Included piping.

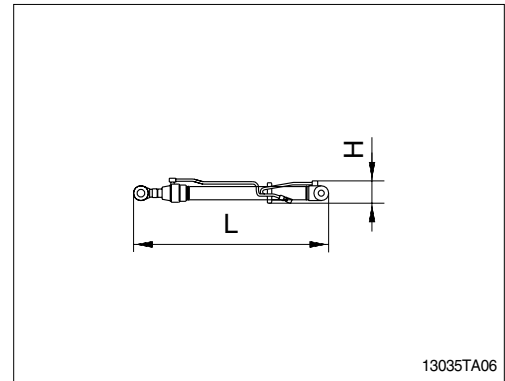

6) CAB ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1962(6' 4")
H	Height	mm(ft-in)	1676(5' 5")
W	Width	mm(ft-in)	1288(4' 3")
Wt	Weight	kg(lb)	310(680)

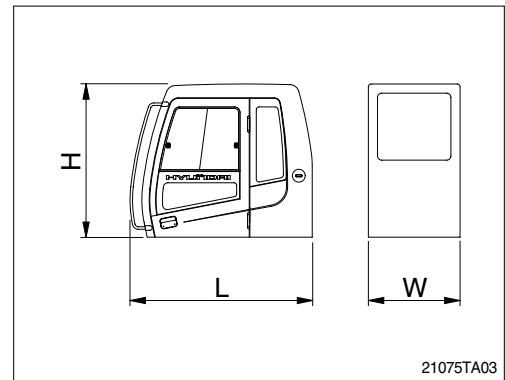

7) COUNTERWEIGHT

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2980(9' 9")
H	Height	mm(ft-in)	1050(3' 5")
W	Width	mm(ft-in)	768(2' 6")
Wt	Weight	kg(lb)	9200(20280)

