


2. SPECIFICATIONS


1) ROBEX 450LC-7A

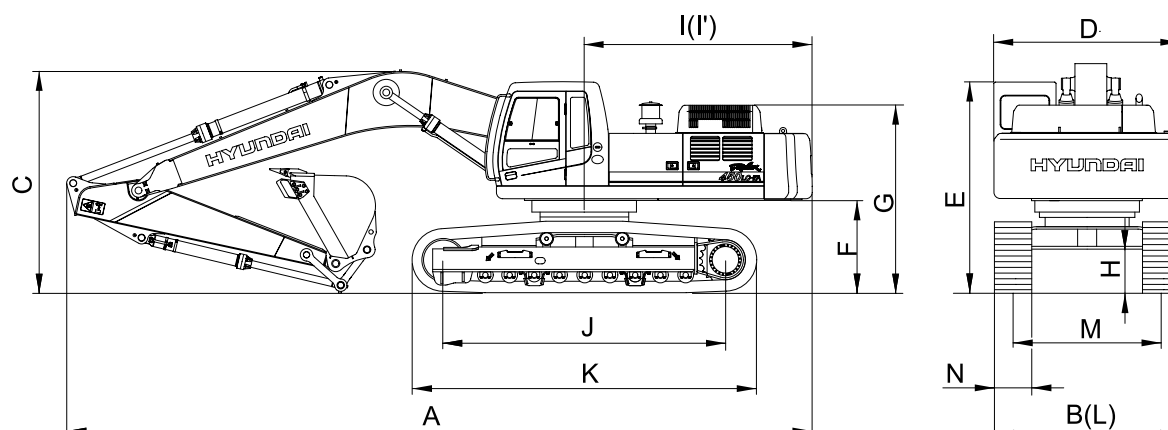

4507A2SP02

Description		Unit	Specification
Operating weight		kg(lb)	45200(99650)
Bucket capacity(SAE heaped), standard		m³(yd³)	2.15(2.81)
Overall length	A	mm(ft-in)	12000(39' 4")
Overall width, with 600mm shoe	B		3340(10'11")
Overall height	C		3600(11'10")
Superstructure width	D		2980(9' 9")
Overall height of cab	E		3250(10' 8")
Ground clearance of counterweight	F		1340(4' 5")
Engine cover height	G		2792(9' 2")
Minimum ground clearance	H		555(1'10")
Rear-end distance	I		3665(12' 0")
Rear-end swing radius	I'		3720(12' 2")
Distance between tumblers	J		4470(14' 8")
Undercarriage length	K		5462(17'11")
Undercarriage width	L		3340(10'11")
Track gauge	M		2740(8'12")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.2/5.0(2.0/3.1)
Swing speed		rpm	9.0
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm²(psi)	0.78(11.09)

2) ROBEX 450-7A

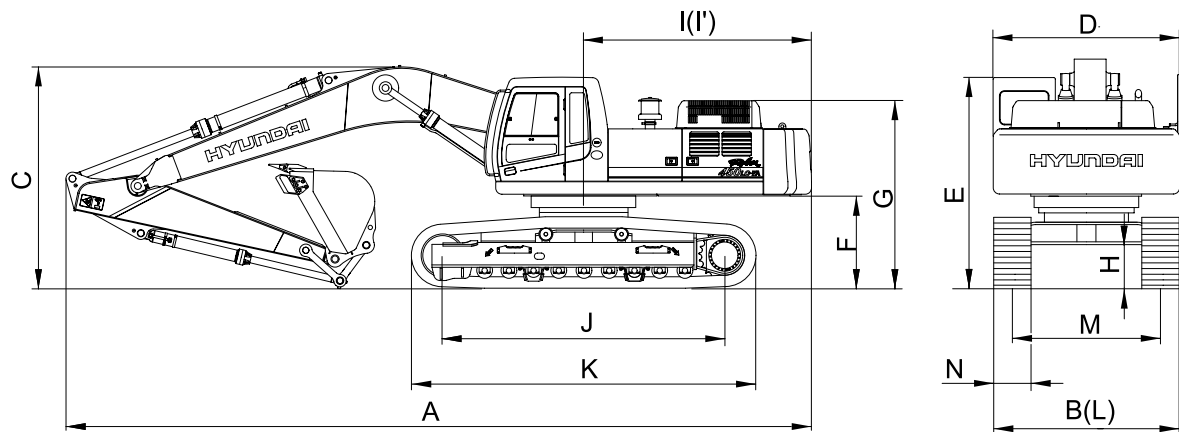

4507A2SP02

Description		Unit	Specification
Operating weight		kg(lb)	43800(96560)
Bucket capacity(SAE heaped), standard		m³(yd³)	2.15(2.81)
Overall length	A	mm(ft-in)	12000(39' 4")
Overall width, with 600mm shoe	B		3340(10'11")
Overall height	C		3600(11'10")
Superstructure width	D		2980(9' 9")
Overall height of cab	E		3230(10' 7")
Ground clearance of counterweight	F		1340(4' 5")
Engine cover height	G		2852(9' 4")
Minimum ground clearance	H		555(1'10")
Rear-end distance	I		3665(12' 0")
Rear-end swing radius	I'		3720(12' 2")
Distance between tumblers	J		4040(13' 3")
Undercarriage length	K		5032(16' 6")
Undercarriage width	L		3340(10'11")
Track gauge	M		2740(8'12")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.2/5.0(2.0/3.1)
Swing speed		rpm	9.0
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm²(psi)	0.83(11.8)