


2. SPECIFICATIONS

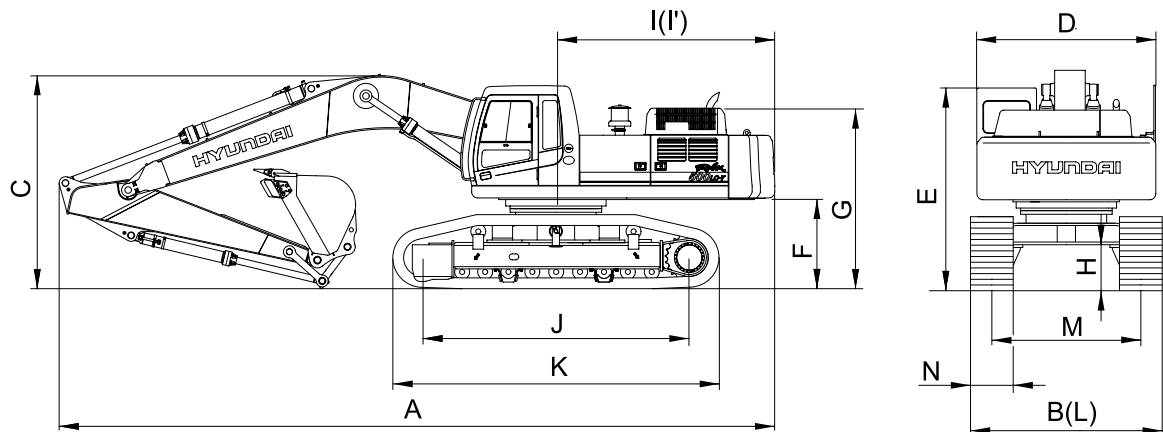

50072SP02

Description		Unit	Specification
Operating weight		kg(lb)	48800(107580)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	2.15(2.81)
Overall length	A	mm(ft-in)	11980(39' 4")
Overall width, with 600mm shoe (Transport position/Working position)	B		2990/3540(9'10"/11'7")
Overall height	C		3670(12' 0")
Superstructure width	D		2980(9' 9")
Overall height of cab	E		3390(11' 1")
Ground clearance of counterweight	F		1500(4'11")
Engine cover height	G		3015(9'11")
Minimum ground clearance	H		770(2' 6")
Rear-end distance	I		3665(12' 0")
Rear-end swing radius	I'		3720(12' 2")
Distance between tumblers	J		4470(14' 8")
Undercarriage length	K		5460(17'11")
Undercarriage width (Transport position/Working position)	L		2990/3540(9'10"/11' 7")
Track gauge (Transport position/Working position)	M		2380/2940(7'10"/ 9' 8")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.3/5.2(2.0/3.2)
Swing speed		rpm	10.0
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.86(12.2)