


2. DIMENSION AND WEIGHT

1) BASE MACHINE

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	6190(20' 4")
H	Height	mm(ft-in)	3390(11' 1")
W	Width	mm(ft-in)	2990(9'10")
Wt	Weight	kg(lb)	29540(65120)

※ With 600mm(24") triple grouser shoes.


※ Remove cakewalk for transport.

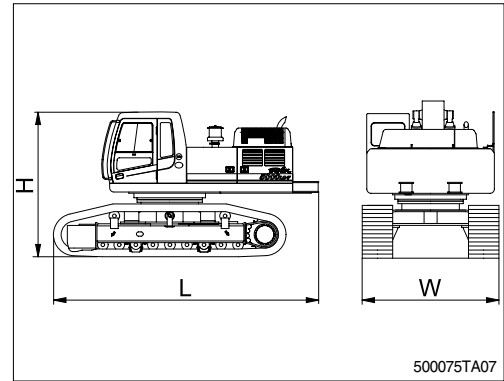

2) BOOM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	7290(23'11")
H	Height	mm(ft-in)	1710(5' 7")
W	Width	mm(ft-in)	830(2' 9")
Wt	Weight	kg(lb)	4180(9220)


※ 7.06m(23' 2") boom with arm cylinder(Included piping and pins).

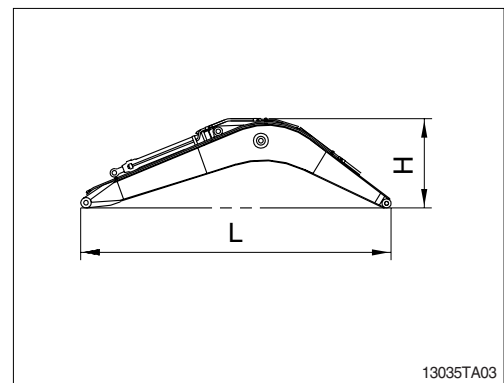

3) ARM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4660(15' 3")
H	Height	mm(ft-in)	1060(3' 6")
W	Width	mm(ft-in)	620(2' 0")
Wt	Weight	kg(lb)	2540(5600)


※ 3.38m(11' 1") arm with bucket cylinder(Included linkage and pins).

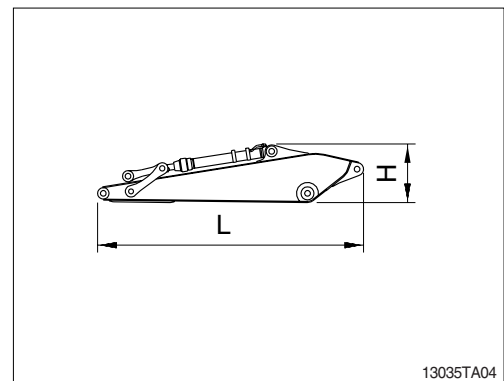

4) BUCKET ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2090(6'10")
H	Height	mm(ft-in)	1240(4' 1")
W	Width	mm(ft-in)	1760(5' 6")
Wt	Weight	kg(lb)	1620(3570)


※ 2.15m³(2.81yd³) SAE heaped bucket(Included tooth and side cutters).

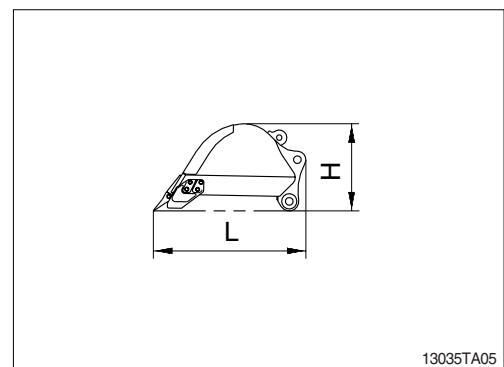

5) BOOM CYLINDER


Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2445(8' 0")
H	Height	mm(ft-in)	326(1' 1")
W	Width	mm(ft-in)	436(1' 5")
Wt	Weight(2EA)	kg(lb)	370(820)

※ Included piping.

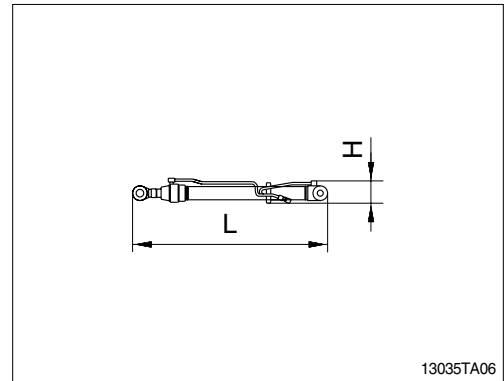


6) CAB ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1962(6' 4")
H	Height	mm(ft-in)	1676(5' 5")
W	Width	mm(ft-in)	1288(4' 3")
Wt	Weight	kg(lb)	310(680)

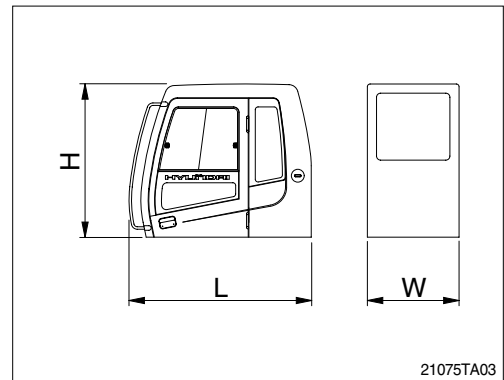

7) COUNTERWEIGHT


Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2980(9' 9")
H	Height	mm(ft-in)	1050(3' 5")
W	Width	mm(ft-in)	768(2' 6")
Wt	Weight	kg(lb)	10200(22490)

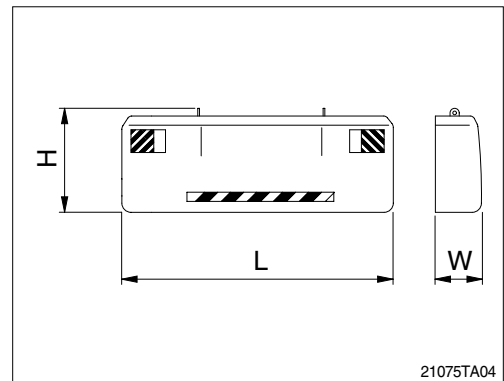

8) COUNTERWEIGHT(OPTION)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2980(9' 9")
H	Height	mm(ft-in)	1050(3' 5")
W	Width	mm(ft-in)	768(2' 6")
Wt	Weight	kg(lb)	10700(23590)


※ 9.0m Boom, 5.85m Arm only

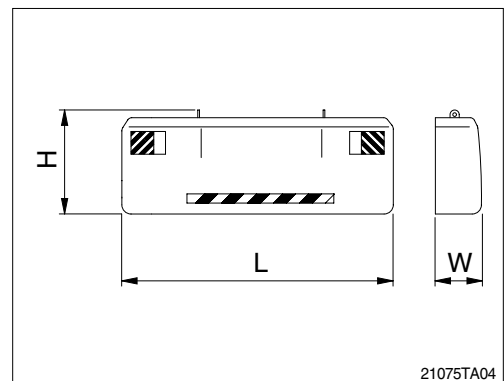

9) BOOM ASSEMBLY(OPTION)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	6780(22' 3")
H	Height	mm(ft-in)	1840(6' 0")
W	Width	mm(ft-in)	830(2' 9")
Wt	Weight	kg(lb)	4050(8930)


※ 6.55m(21' 6") boom with arm cylinder(Included piping and pins).

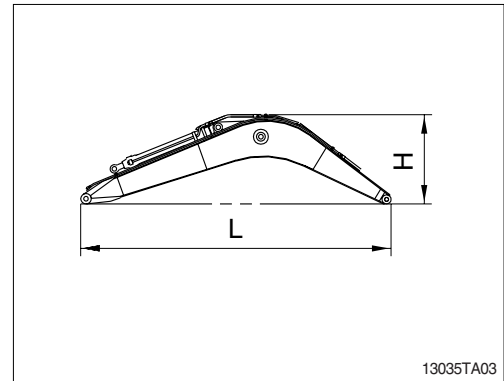

10) BOOM ASSEMBLY(OPTION)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	9230(30' 3")
H	Height	mm(ft-in)	1850(6' 1")
W	Width	mm(ft-in)	830(2' 9")
Wt	Weight	kg(lb)	4950(10910)


※ 9.00m(29' 6") boom with arm cylinder(Included piping and pins).

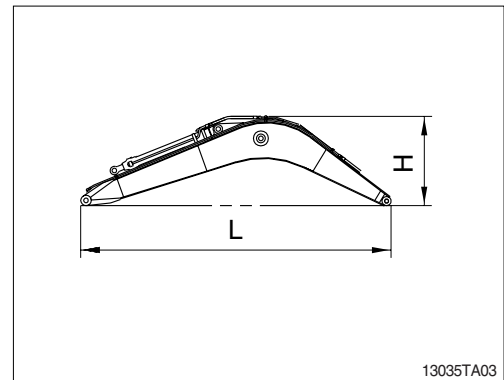

11) ARM ASSEMBLY(OPTION)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	3810(12' 6")
H	Height	mm(ft-in)	1205(3' 11")
W	Width	mm(ft-in)	620(2' 0")
Wt	Weight	kg(lb)	2440(5380)

※ 2.4m(7'10") arm with bucket cylinder(Included linkage and pins).

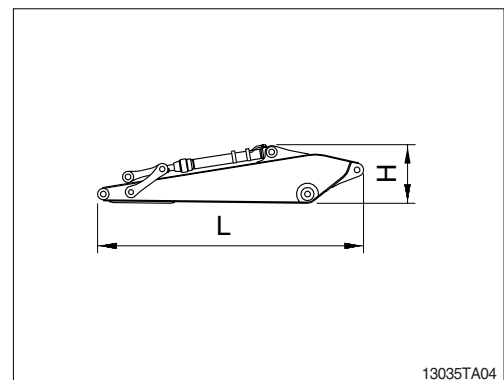

12) ARM ASSEMBLY(OPTION)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	7100(23' 4")
H	Height	mm(ft-in)	1055(3' 6")
W	Width	mm(ft-in)	620(2' 0")
Wt	Weight	kg(lb)	3150(6940)

※ 5.85m(19' 2") arm with bucket cylinder(Included linkage and pins).

