



2. SPECIFICATIONS

· 7.20m(23' 7") BOOM, 2.95m(9' 8") ARM

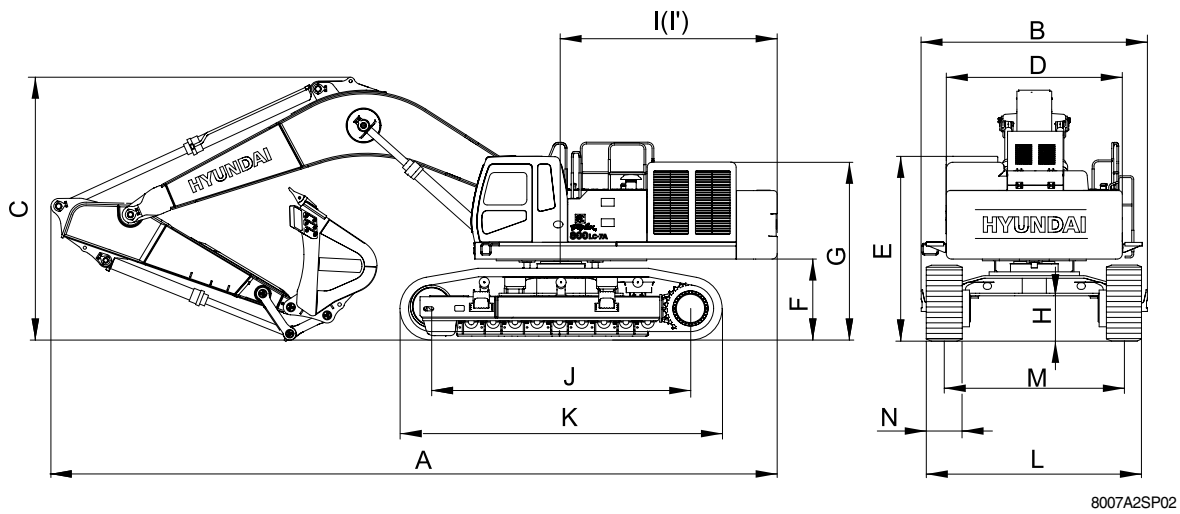


Description		Unit	Specification
Operating weight		kg(lb)	82320(181480)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	4.53(5.93)
Overall length	A	mm(ft-in)	13100(43' 0")
Overall width, with 700mm shoe (Transport position/Working position)	B		3675/4395(12' 1 1/4' 5")
Overall height	C		5040(16' 6")
Superstructure width	D		3420(11' 3")
Overall height of cab	E		3580(11' 9")
Ground clearance of counterweight	F		1570(5' 2")
Engine cover height	G		3480(11' 5")
Minimum ground clearance	H		880(2' 11")
Rear-end distance	I		4200(13' 9")
Rear-end swing radius	I'		4315(14' 2")
Distance between tumblers	J		5030(16' 6")
Undercarriage length	K		6335(20' 9")
Undercarriage width (Transport position/Working position)	L		3480/4200(11' 5"/13' 9")
Track gauge (Transport position/Working position)	M		2780/3500(9' 1"/11' 6")
Track shoe width, standard	N		700(28")
Travel speed(Low/high)		km/hr(mph)	2.6/4.0(1.6/2.5)
Swing speed		rpm	6.3
Gradeability		Degree(%)	35(70)
Ground pressure(700mm shoe)		kgf/cm ² (psi)	1.07(15.22)

· 8.05m(26' 5") BOOM, 3.40m(11' 2") ARM

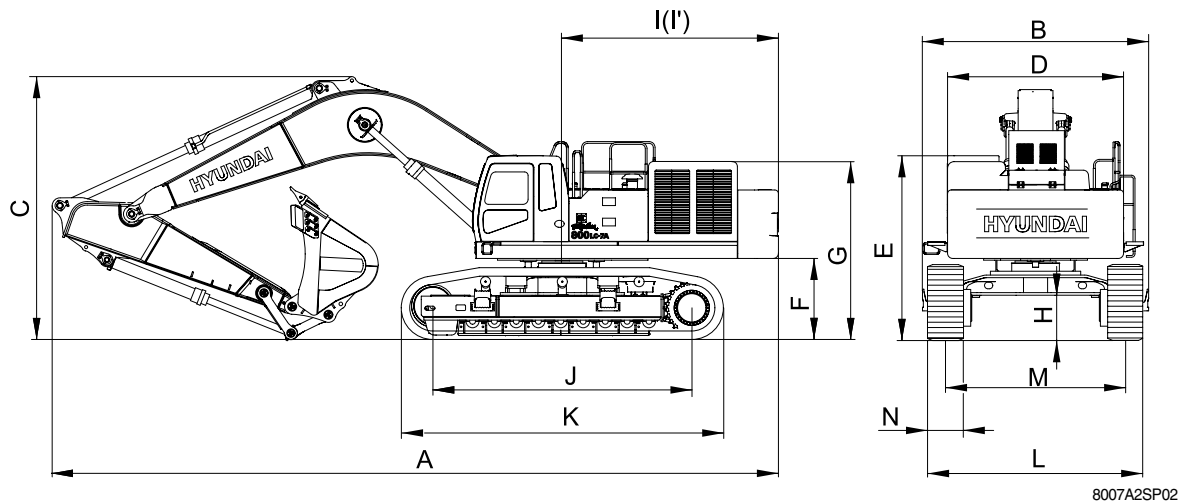

Description		Unit	Specification
Operating weight		kg(lb)	82500(181880)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	3.40(4.45)
Overall length	A	mm(ft-in)	13950(45' 9")
Overall width, with 700mm shoe (Transport position/Working position)	B		3675/4395(12' 1"/14' 5")
Overall height	C		5360(17' 7")
Superstructure width	D		3420(11' 3")
Overall height of cab	E		3580(11' 9")
Ground clearance of counterweight	F		1570(5' 2")
Engine cover height	G		3480(11' 5")
Minimum ground clearance	H		880(2' 11")
Rear-end distance	I		4200(13' 9")
Rear-end swing radius	I'		4315(14' 2")
Distance between tumblers	J		5030(16' 6")
Undercarriage length	K		6335(20' 9")
Undercarriage width (Transport position/Working position)	L		3480/4200(11' 5"/13' 9")
Track gauge (Transport position/Working position)	M		2780/3500(9' 1"/11' 6")
Track shoe width, standard	N		700(28")
Travel speed(Low/high)		km/hr(mph)	2.6/4.0(1.6/2.5)
Swing speed		rpm	6.3
Gradeability		Degree(%)	35(70)
Ground pressure(700mm shoe)		kgf/cm ² (psi)	1.07(15.22)

· 8.20m(26' 11") BOOM, 3.60m(11' 10") ARM

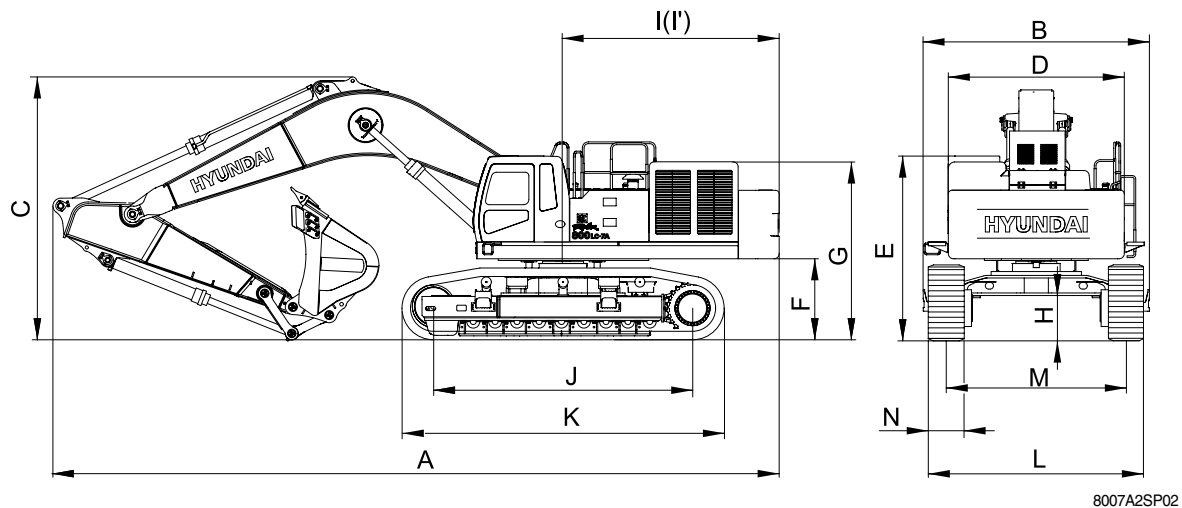

Description		Unit	Specification
Operating weight		kg(lb)	83170(183360)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	3.40(4.45)
Overall length	A	mm(ft-in)	14110(46' 4")
Overall width, with 700mm shoe (Transport position/Working position)	B		3675/4395(12' 1"/14' 5")
Overall height	C		5250(17' 3")
Superstructure width	D		3420(11' 3")
Overall height of cab	E		3580(11' 9")
Ground clearance of counterweight	F		1570(5' 2")
Engine cover height	G		3480(11' 5")
Minimum ground clearance	H		880(2' 11")
Rear-end distance	I		4200(13' 9")
Rear-end swing radius	I'		4315(14' 2")
Distance between tumblers	J		5030(16' 6")
Undercarriage length	K		6335(20' 9")
Undercarriage width (Transport position/Working position)	L		3480/4200(11' 5"/13' 9")
Track gauge (Transport position/Working position)	M		2780/3500(9' 1"/11' 6")
Track shoe width, standard	N		700(28")
Travel speed(Low/high)		km/hr(mph)	2.6/4.0(1.6/2.5)
Swing speed		rpm	6.3
Gradeability		Degree(%)	35(70)
Ground pressure(700mm shoe)		kgf/cm ² (psi)	1.07(15.22)