


2. DIMENSION AND WEIGHT

1) BASE MACHINE 1

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	7150(23' 6")
H	Height	mm(ft-in)	3870(12' 8")
W	Width	mm(ft-in)	3480(11' 5")
Wt	Weight	kg(lb)	51000(112440)


※ With 700mm(28") double grouser shoes.

※ Remove catwalk for transport.

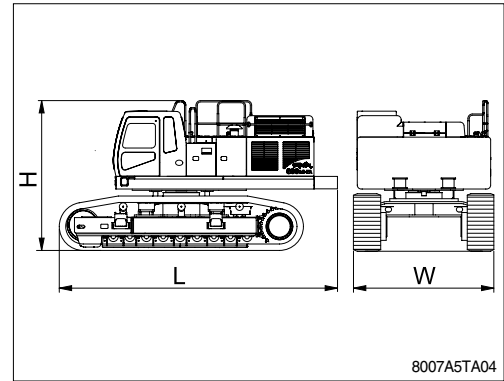

2) BASE MACHINE 2


Mark	Description	Unit	Specification
L	Length	mm(ft-in)	5945(19' 6")
H	Height	mm(ft-in)	2940(9' 8")
W	Width	mm(ft-in)	3420(11' 3")
Wt	Weight	kg(lb)	24800(54680)

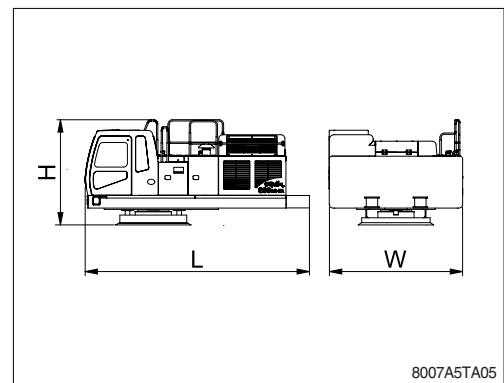

3) TRACK FRAME

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	6335(20' 9")
H	Height	mm(ft-in)	1480(4' 10")
W	Width	mm(ft-in)	1720(5' 8")
Wt	Weight	kg(lb)	26200(57760)


※ Shoe(700mm)

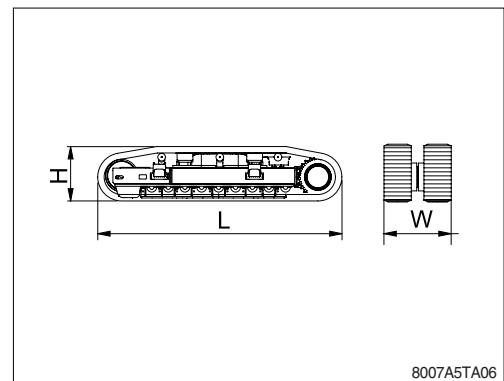

4) BOOM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	7530(27' 8")
H	Height	mm(ft-in)	2735(9' 0")
W	Width	mm(ft-in)	1340(4' 5")
Wt	Weight	kg(lb)	7690(16950)


※ 7.20m(23' 7") boom with arm cylinder(Included piping and pins).

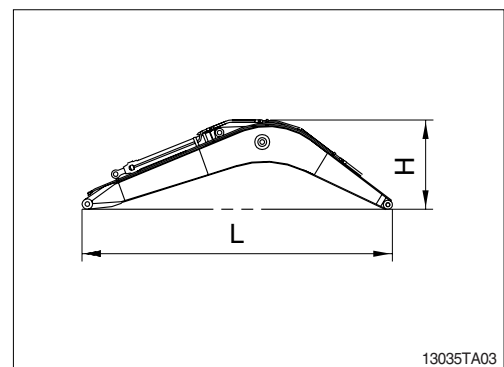

5) ARM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4540(14' 11")
H	Height	mm(ft-in)	1435(4' 8")
W	Width	mm(ft-in)	800(2' 7")
Wt	Weight	kg(lb)	4475(9870)


※ 2.95m(9' 8") arm with bucket cylinder(Included linkage and pins).

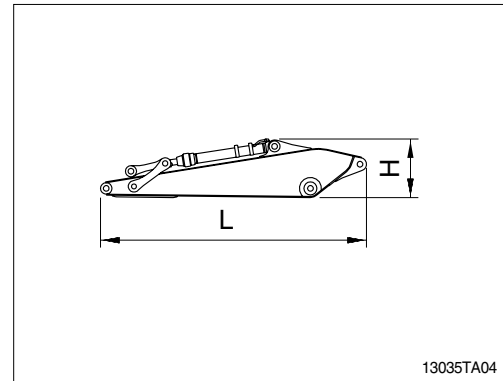

6) BUCKET ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2600(8' 6")
H	Height	mm(ft-in)	1780(5' 10")
W	Width	mm(ft-in)	2200(7' 3")
Wt	Weight	kg(lb)	4190(9240)


※ 4.53(5.93yd³) SAE heaped bucket(Included tooth and side cutters).

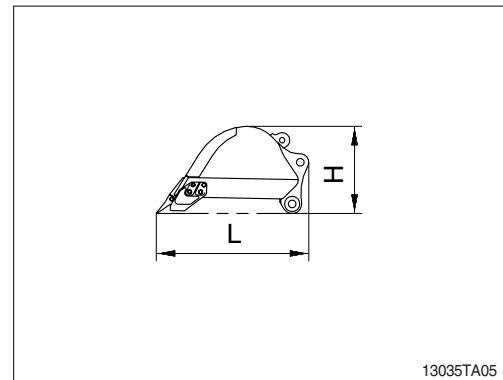

7) BOOM CYLINDER


Mark	Description	Unit	Specification
L	Length	mm(ft-in)	3160(10' 4")
H	Height	mm(ft-in)	518(1' 8")
W	Width	mm(ft-in)	335(1' 1")
Wt	Weight(2EA)	kg(lb)	1500(3310)

※ Included piping.

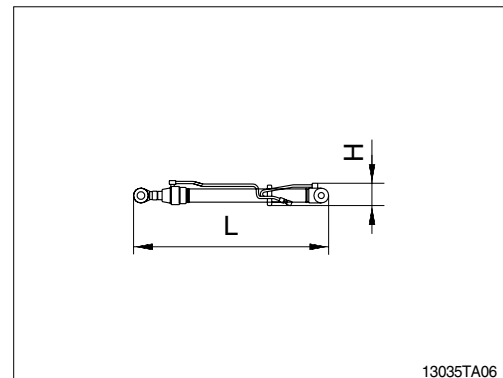


8) CAB ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1962(6' 5")
H	Height	mm(ft-in)	1676(5' 6")
W	Width	mm(ft-in)	1288(4' 3")
Wt	Weight	kg(lb)	310(680)

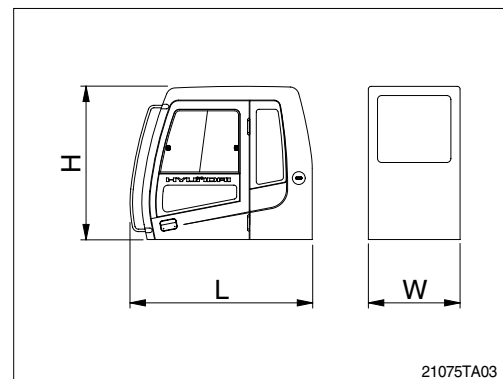

9) COUNTERWEIGHT


Mark	Description	Unit	Specification
L	Length	mm(ft-in)	3420(11' 3")
H	Height	mm(ft-in)	1370(4' 6")
W	Width	mm(ft-in)	790(2' 7")
Wt	Weight	kg(lb)	12550(27670)

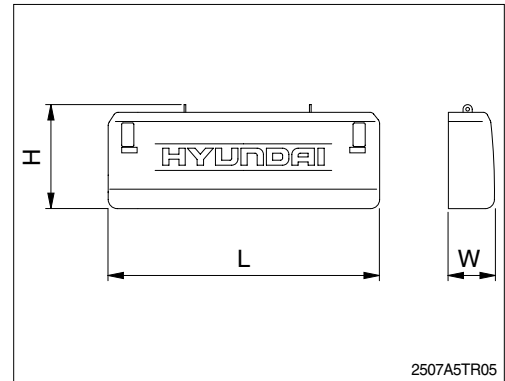

10) BOOM ASSEMBLY(OPTION)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	8375(27' 6")
H	Height	mm(ft-in)	2980(9' 9")
W	Width	mm(ft-in)	1340(4' 5")
Wt	Weight	kg(lb)	8345(18400)


※ 8.05m(26' 5") boom with arm cylinder(Included piping and pins).

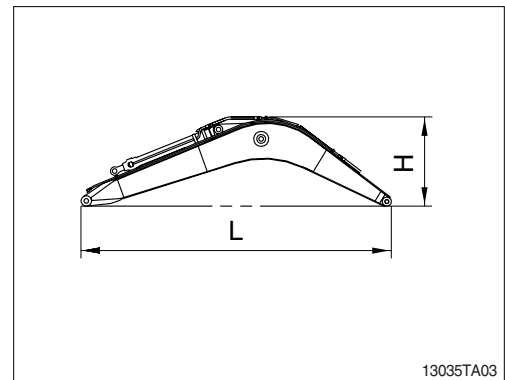

11) BOOM ASSEMBLY(OPTION)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	8550(28' 1")
H	Height	mm(ft-in)	2985(9' 10")
W	Width	mm(ft-in)	1340(4' 5")
Wt	Weight	kg(lb)	8800(19400)


※ 8.2m(26' 11") boom with arm cylinder(Included piping and pins).

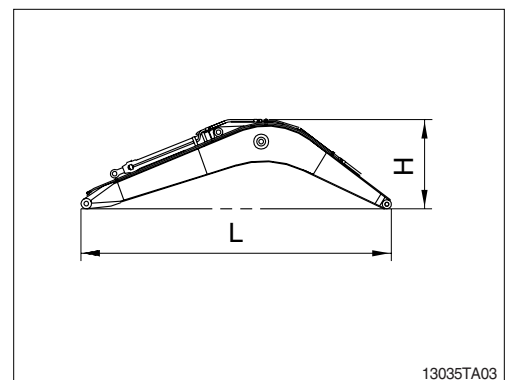

12) ARM ASSEMBLY(OPTION)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4990(16' 4")
H	Height	mm(ft-in)	1360(4' 6")
W	Width	mm(ft-in)	800(2' 8")
Wt	Weight	kg(lb)	4635(10220)

※ 3.4m(11' 2") arm with bucket cylinder(Included linkage and pins).

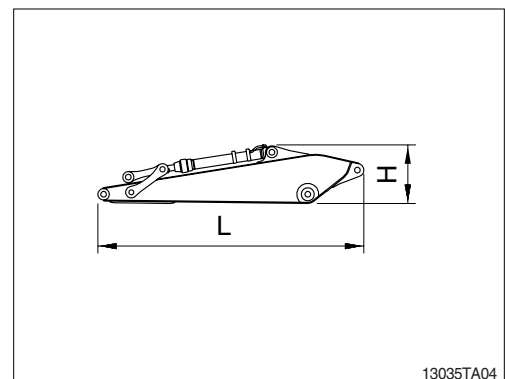

13) **ARM ASSEMBLY(OPTION)**

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	5235(17' 2")
H	Height	mm(ft-in)	1435(4' 8")
W	Width	mm(ft-in)	800(2' 8")
Wt	Weight	kg(lb)	4850(10690)

※ 3.60m(11' 10") arm with bucket cylinder(Included linkage and pins).

