


2. DIMENSION AND WEIGHT

1) BASE MACHINE(STD)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4160(13' 8")
H	Height	mm(ft-in)	2820(9' 3")
W	Width	mm(ft-in)	2600(8' 6")
Wt	Weight	kg(lb)	11600(25580)


※ With 600mm(24") triple grouser shoes and 2200kg (4850lb) counterweight.

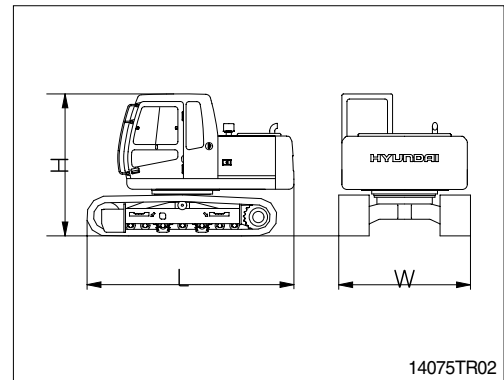

2) BASE MACHINE(Dozer blade)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4570(14'12")
H	Height	mm(ft-in)	2820(9' 3")
W	Width	mm(ft-in)	2600(8' 6")
Wt	Weight	kg(lb)	12420(27390)


※ With 600mm(24") triple grouser shoes and 2200kg (4850lb) counterweight.

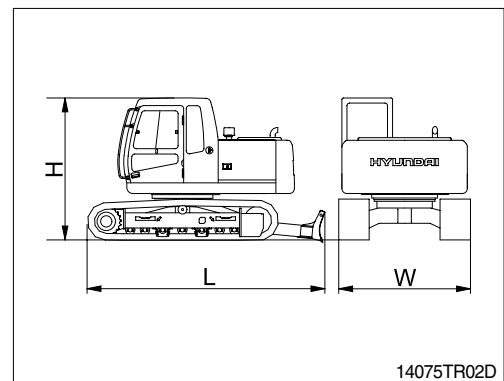

3) BASE MACHINE(R140LCM-7A)

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4240(13' 9")
H	Height	mm(ft-in)	2820(9' 3")
W	Width	mm(ft-in)	2910(9' 7")
Wt	Weight	kg(lb)	14460(31880)


※ With 800mm(32") triple grouser shoes and 2200kg (4850lb) counterweight.

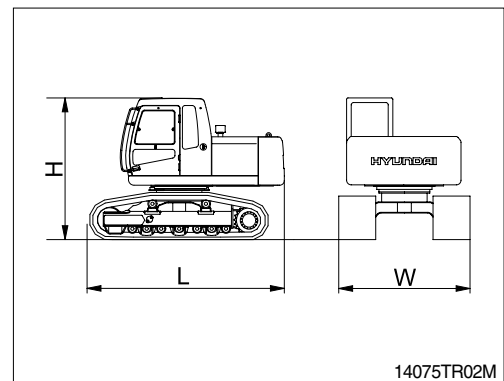

4) BOOM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4760(15' 7")
H	Height	mm(ft-in)	1340(4' 5")
W	Width	mm(ft-in)	520(1' 8")
Wt	Weight	kg(lb)	1020(2250)


※ 4.6m(15' 1") boom with arm cylinder(Included piping and pins).

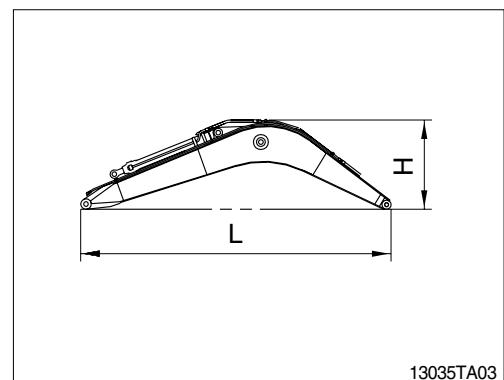

5) ARM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	3260(10' 8")
H	Height	mm(ft-in)	740(2' 5")
W	Width	mm(ft-in)	380(1' 3")
Wt	Weight	kg(lb)	620(1370)


※ 2.50m(8' 2") arm with bucket cylinder(Included linkage and pins).

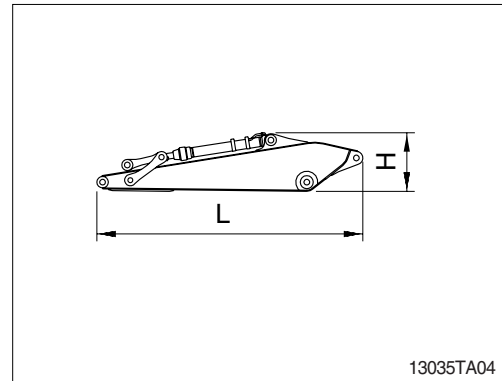

6) BUCKET ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1400(4' 7")
H	Height	mm(ft-in)	800(2' 7")
W	Width	mm(ft-in)	1130(3' 8")
Wt	Weight	kg(lb)	480(1060)


※ 0.58m³(0.76yd³) PCSA heaped bucket(Included tooth and side cutters).

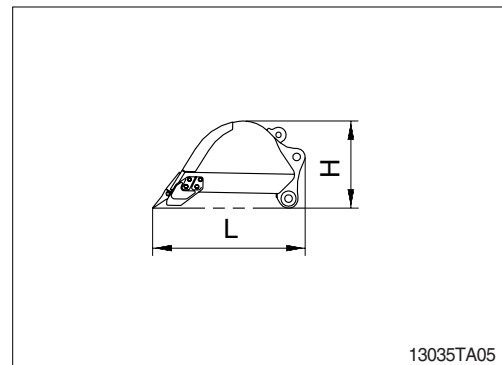

7) BOOM CYLINDER


Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1760(5' 9")
H	Height	mm(ft-in)	210(0' 8")
W	Width	mm(ft-in)	310(1' 0")
Wt	Weight(2EA)	kg(lb)	260(570)

※ Included piping.

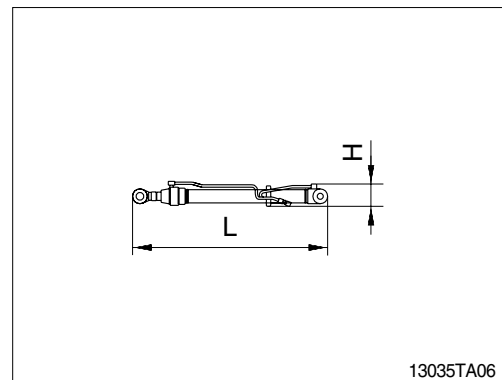

8) CAB ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1962(6' 4")
H	Height	mm(ft-in)	1676(5' 5")
W	Width	mm(ft-in)	1288(4' 2")
Wt	Weight	kg(lb)	310(680)

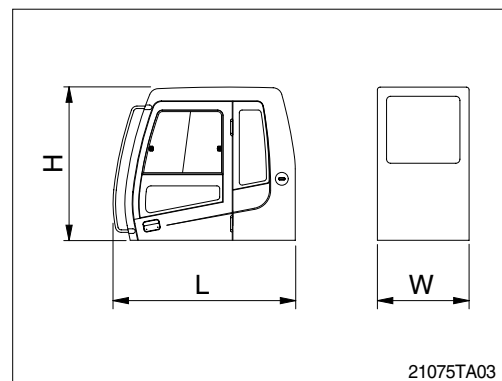

9) COUNTERWEIGHT

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2475(8' 1")
H	Height	mm(ft-in)	1050(3' 5")
W	Width	mm(ft-in)	450(1' 6")
Wt	Weight	kg(lb)	2200(4830)

