
SAFETY LABELS

1. LOCATION

Always keep these labels clean. If they are lost or damage, attach them again or replace them with a new label.

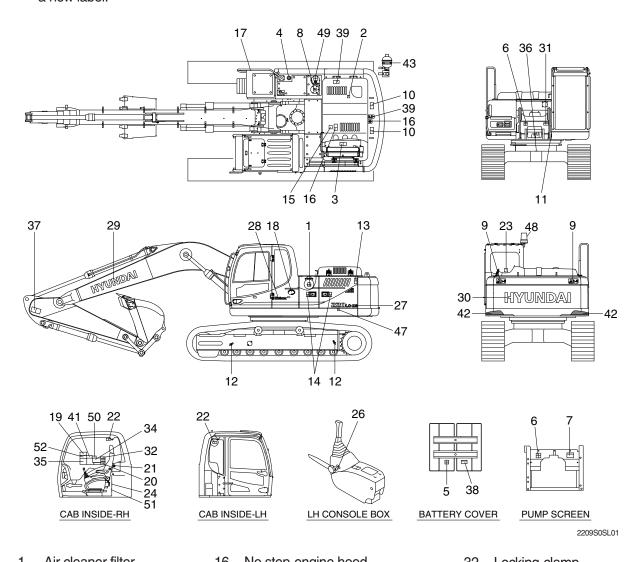

Air cleaner tilter	16	No step-engine hood	32	Locking-clamp
Turbocharger cover	17	Transporting	34	Service instruction
Radiator cap	18	Low emission engine	35	Lifting chart
Fueling	19	Control ideogram	36	Tie
Battery accident	20	Ref operator manual-cab RH pillar	37	Keep clear-boom/arm
High pressure hose	21	Hammer	38	Connector
Hydraulic oil level	22	Safety front window	39	Falling
Hydraulic oil lubrication	23	Alternate exit	41	Turbocharger
Keep clear-rear	24	Air conditioner filter	42	Reflecting
Lifting eye	26	Safety lever	43	Accumulator
Name plate	27	Model name	48	Beacon lamp
Slinging ideogram	28	Logo (ROBEX)	49	Fuel shut off
Keep clear-side	29	Trade mark (boom)	50	Water separator
Stay fix	30	Trade mark (CWT)	51	MCU connector
Shearing-engine hood	31	Reduction gear grease	52	Machine control pattern
	Turbocharger cover Radiator cap Fueling Battery accident High pressure hose Hydraulic oil level Hydraulic oil lubrication Keep clear-rear Lifting eye Name plate Slinging ideogram Keep clear-side Stay fix	Turbocharger cover 17 Radiator cap 18 Fueling 19 Battery accident 20 High pressure hose 21 Hydraulic oil level 22 Hydraulic oil lubrication 23 Keep clear-rear 24 Lifting eye 26 Name plate 27 Slinging ideogram 28 Keep clear-side 29 Stay fix 30	Turbocharger cover Radiator cap Fueling Battery accident High pressure hose Hydraulic oil level Hydraulic oil lubrication Keep clear-rear Lifting eye Name plate Slinging ideogram 17 Transporting Low emission engine 18 Low emission engine 19 Control ideogram Ref operator manual-cab RH pillar Hammer 10 Hammer 11 Hammer 12 Safety front window 12 Alternate exit 13 Alternate exit 14 Air conditioner filter 15 Safety lever 16 Safety lever 17 Model name 17 Transporting 18 Low emission engine 18 Low emission engine 19 Control ideogram 19 Control ideogram 10 RH pillar 11 Hammer 12 Safety front window 12 Alternate exit 13 Alternate exit 14 Air conditioner filter 15 Safety lever 16 Safety lever 17 Model name 17 Transporting 18 Low emission engine 18 Low emission engine 19 Control ideogram 19 Control ideogram 10 RH pillar 11 Transporting 19 Control ideogram 10 RH pillar 11 Transporting 10 Control ideogram 12 RH pillar 13 Alternate exit 14 Air conditioner filter 15 Safety lever 16 Safety lever 17 Model name 18 Logo (ROBEX) 17 Trade mark (boom) 18 Low emission engine 19 Control ideogram 10 Control ideog	Turbocharger cover 17 Transporting 34 Radiator cap 18 Low emission engine 35 Fueling 19 Control ideogram 36 Battery accident 20 Ref operator manual-cab RH pillar 37 High pressure hose 21 Hammer 38 Hydraulic oil level 22 Safety front window 39 Hydraulic oil lubrication 23 Alternate exit 41 Keep clear-rear 24 Air conditioner filter 42 Lifting eye 26 Safety lever 43 Name plate 27 Model name 48 Slinging ideogram 28 Logo (ROBEX) 49 Keep clear-side 29 Trade mark (boom) 50 Stay fix 30 Trade mark (CWT) 51

2. DESCRIPTION


There are several specific warning labels on this machine please become familiarized with all warning labels.

Replace any safety label that is damaged, or missing.

1) AIR CLEANER FILTER (item 1)

This warning label is positioned on the air cleaner cover.

** Periodic and proper inspection, cleaning and change of elements prolong engine life time and maintain the good performance of engine.

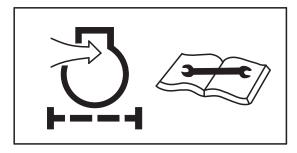

21070FW01

2) TURBOCHARGER COVER (item 2)

This warning label is positioned on the turbocharger cover.

▲ Do not touch turbocharger or it may cause severe burn.



21070FW02

3) RADIATOR CAP (item 3)

This warning label is positioned on the radiator.

A Never open the filler cap while engine running or at high coolant temperature.




14070FW03

4) FUELING (item 4)

This warning label is positioned on the right side of fuel filler neck.


▲ Stop the engine when refueling. All lights or flames shall be kept at a safe distance while refueling.

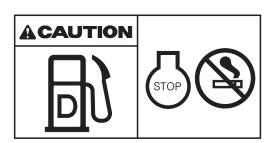

5) BATTERY ACCIDENT (item 5)

This warning label is positioned on the battery cover.

- ▲ Electrolyte containing sulfuric acid cause severe burns. Avoid being in contact with skin, eyes or clothes. In the event of accident flush with sufficient water, call a physician immediately.
- * Maintain the electrolyte at the recommended level.
 - With electrolyte at proper level, less space may cause the gases to be accumulated in the battery.
- ▲ Extinguish all smoking materials and open flames before checking the battery.
- ▲ Do not use matches, lighters or torches as a light source near the battery for the probable presence of explosive gas.
- ♠ Do not allow unauthorized personnel to change the battery or to use booster cables.
- ▲ For safety from electric shock, do not battery terminal with a wet hand.

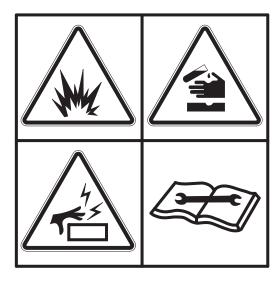

36070FW05

6) HIGH PRESSURE HOSE (item 6)

This warning label is positioned on the screen plate.

- ▲ Escaping fluid under pressure can penetrate the skin causing serious injury.
- Study the service manual before service job.




14070FW29

7) HYDRAULIC OIL LEVEL (item 7)

This warning label is positioned on the screen plate.

- ▲ Place the bucket on the ground whenever servicing the hydraulic system.
- * Check oil level on the level gauge.
- * Refill the recommended hydraulic oil up to specified level if necessary.

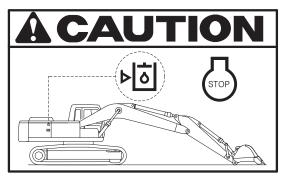

21070FW07

8) HYDRAULIC OIL LUBRICATION (item 8)

This warning label is positioned on the top of the hydraulic tank.

- * Do not mix with different brand oils.
- A Never open the filler cap while high temperature.
- ▲ Loosen the cap slowly and release internal pressure completely.




14070FW08

9) KEEP CLEAR (item 9)

This warning label is positioned on the rear of counterweight.

- ▲ To prevent serious personal injury or death keep clear or machine swing radius.
- ▲ Do not deface of remove this label from the machine.

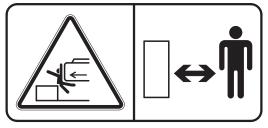


21090FW09

10) LIFTING EYE (item 10)

This warning label is positioned on the counterweight.

- ▲ Do not lift the machine by using lifting eyes on the counterweight or the lifting eyes may be subject to overload causing its breaking and possible personal injury.
- See page 5-9 for proper lifting method of the machine.

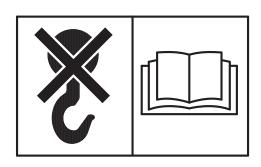

21070FW10

11) SIDE KEEP CLEAR (item 13)

This warning label is positioned on the side of LH rear side cover.

- ▲ To prevent serious personal injury or death keep clear of machine swing radius.
- ♠ Do not deface or remove this label from the machine.




21070FW13

12) STAY FIX (item 14)

This warning label is positioned on the side cover.

- ♠ Be sure to support the stay when the door needs to be opened.
- A Be careful that the opened door may be closed by the external or natural force like strong wind.

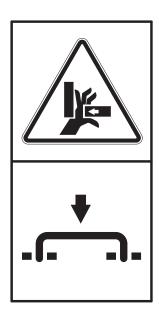

21070FW14

13) SHEARING-ENGINE HOOD (item 15)

This warning label is positioned on the engine hood.

- ▲ Don't open the engine hood during the engine's running.
- ♠ Don't touch exhaust pipe or it may cause severe burn.



14) NO STEP-ENGINE HOOD (item 16)

This warning label is positioned on the engine hood.

 \triangle Don't step on the engine hood.




21070FW16

15) TRANSPORTING (item 17)

This warning label is positioned right side of upper frame.

A Study the operator's manual before transporting the machine, if provided and tie down arm and track to the carrier with lashing wire.

See page 5-8 for details.

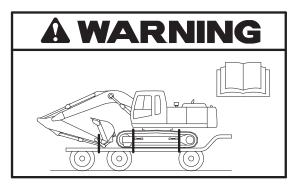


14070FW17

16) CONTROL IDEOGRAM (item 19)

This warning label is positioned in right window of the cab.

- A Check the machine control pattern for conformance to pattern on this label. If not, change label to match pattern before operating machine.
- ▲ Failure to do so could result in injury or death.

See page 4-20 for details.

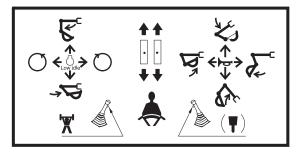


36070FW19

17) REF OPERATOR MANUAL (item 20)

This warning label is positioned on the right side window of the cab.

▲ Study the operator's manual before starting and operating machine.

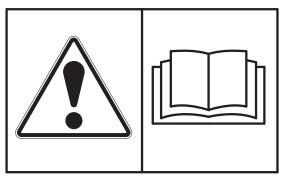


18) MAX HEIGHT (item 20)

This warning label is positioned on the right side window of the cab.

▲ Serious injury or death can result from contact with electric lines.

An electric shock being received by merely coming into the vicinity of an electric lines, the minimum distance should be kept considering the supply voltage as page 1-7.

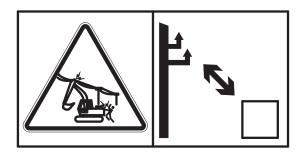


21070FW23

19) INTERFERENCE (item 20)

This warning label is positioned on the right side window of the cab.

- ▲ Be careful to operate machine equipped with quick clamp or extensions.
- ♠ Bucket may hit cab or boom, boom cylinders when it reached vicinity of them.

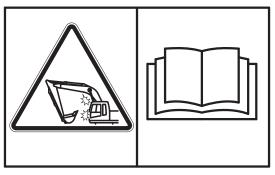


21090FW62

20) SAFETY FRONT WINDOW (item 22)

This warning label is positioned on the both side window of the cab.

A Be careful that the front window may be promptly closed.

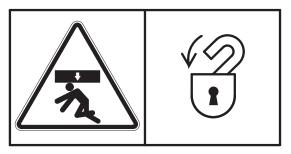


21070FW24

21) ALTERNATE EXIT (item 23)

This warning label is positioned on the inside of rear window.


- * The rear window serves us an alternate exit.
- * To remove rear window, pull the ring and push out the glass.



22) AIR CONDITIONER FILTER (item 24)

This warning label is positioned on the air conditioner cover.

** Periodic and proper inspection, cleaning and change of filter prolong air conditioner life time and maintain good performance.

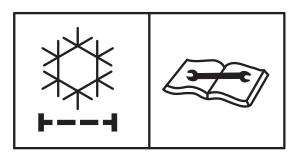


21070FW26

23) SAFETY LEVER (item 26)

This warning label is positioned on the cover of the safety lever.

▲ Before you get off the machine be sure to place the safety lever LOCKED position.

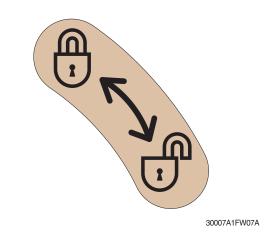

24) REDUCTION GEAR GREASE (item 31)

This warning label is positioned in the front of upper frame.

▲ Grease is under high pressure. Grease coming out of the grease plug under pressure can penetrate the body causing injury or death.




21070FW35

25) CLAMP-LOCKING (item 32)

This warning label is positioned on the right side window of cab.

- ▲ Serious injury or death can result from dropping bucket.
- ♠ Operating the machine with quick clamp switch unlocked or without safety pin of moving hook can cause the bucket to drop off.

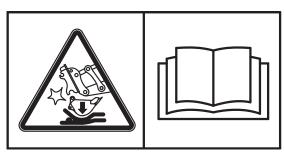

26) TIE (item 36)

This warning label is positioned on the lower frame.

- ▲ Make sure no personal are standing close to the tow rope.
- ▲ See page 4-23 for detail.



4507A0FW02

27) KEEP CLEAR-BOOM/ARM (item 37)

This warning label is positioned on both side of the arm.

- ▲ Serious injury or death can result from falling of the attachment.
- ▲ To prevent serious injury or death, keep clear the underneath of attachment.



14070FW31

28) CONNECTOR (item 38)

This warning label is positioned on the battery cover.

- ♠ Before carrying out any electric welding on this machine, follow the below procedure.
- Pull the connector out of all electric control units.
- Connector the ground lead of the welding equipment as close to the welding point as possible.
- * See page 6-43 for detail.

MARNING

- · Before carrying out any electric welding on this machine
- Pull the connectors out of all electronic control units.
- Connect the ground lead of the welding equipment as close to the welding point as possible.
- Read the instructions in operator's manual for

7807AFW20

29) FALLING (item 39)

This warning label is positioned on the top of the hydraulic tank.

- ♠ Falling is one of the major cause of personal injury.
- ♠ Be careful of slippery conditions on the platforms, steps and handrails when standing on the machine.



14070FW30

30) TURBOCHARGER (item 41)

This warning label is positioned on the right window of the cab.

▲ In order to prevent turbocharger failure, please allow more than 5 minutes cool down period (no load low idle operation) before shutting the engine off.

A CAUTION

In order to prevent turbocharger failure, please allow more than 5 minutes' cool down period(no load low idle operation) before shutting the engine off.

7807AFW20

31) REFLECTING (item 42)

This warning label is positioned on the rear of counterweight.

- ▲ To prevent serious personal injury or death keep clear of machine swing radi-
- ♠ Do not deface or remove this label from the machine.



32) ACCUMULATOR (item 43)

This warning label is positioned on the accumulator of the solenoid valve.

- The accumulator is filled with high-pressure nitrogen gas, and it is extremely dangerous if it is handled in the wrong way. Always observe the following precautions.
- A Never make any hole in the accumulator expose it to flame or fire.
- **A** Do not weld anything to the accumulator.
- When carrying out disassembly or maintenance of the accumulator, or when disposing of the accumulator, it is necessary to release the gas from the accumulator. A special air bleed valve is necessary for this operation, so please contact your Hyundai distributor.




1107A0FW46

33) BEACON LAMP (item 48)

This warning label is positioned on the center outside of the cabin.

- Make sure the beacon lamp maintains a vertical position.
 - A horizontal position can result in a decrease in life time of the lamp due to the infiltration of foreign substances such as dust or water.
- While the machine transfer, the beacon lamp is easy to break. In that case, change the position of the lamp to the horizontal.

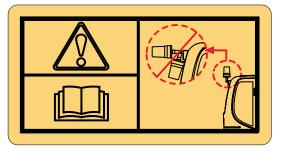


140Z90FW49

34) FUEL SHUT OFF (item 49)

This warning label is positioned on the left side of the hydraulic tank.

- Fill only the hydraulic oil.
- » Do not fill the diesel fuel.

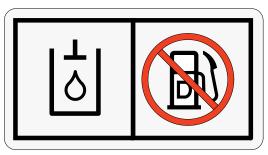

140WH90FW51

35) WATER SEPARATOR (item 50)

This warning label is positioned in right window of the cab.

▲ In order to protect high pressure fuel system, please drain water in water separator before starting the engine.



210N90FW50

36) MCU CONNECTOR (item 51)

This warning label is positioned on the low cover of the air conditioner in the cab.

- ** MCU communicates the machine data with Laptop computer through RS232 service socket.
- * See page 3-60 for details.


MCU Service Tool MCU 서비스툴

1409S0FW52

37) MACHINE CONTROL PATTERN (item 52) This warning label is positioned inside of

radiator screen plate.

- ♠ Check the machine control pattern for conformance to pattern on this label. If not, change label to match pattern before operating machine.
- ▲ Failure to do so could result in injury or death.
- * See page 4-34 for details.

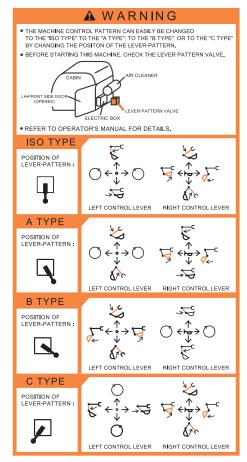

2209S0FW21