


2. DIMENSION AND WEIGHT

1) R290LC-7A

(1) BASE MACHINE

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	5730(18' 10")
H	Height	mm(ft-in)	3090(10' 2")
W	Width	mm(ft-in)	3280(10' 9")
Wt	Weight	kg(lb)	26200(57760)


※ With 600mm(24") triple grouser shoes and 6200kg (13670lb) counterweight.

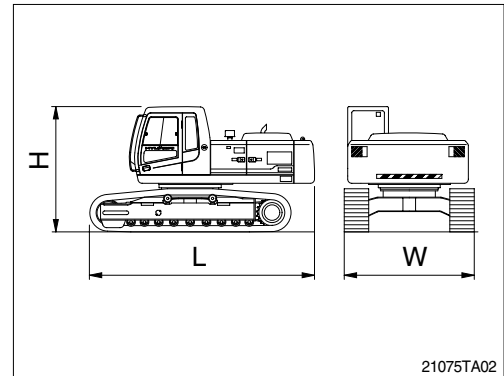

(2) BOOM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	6670(21' 11")
H	Height	mm(ft-in)	1720(5' 8")
W	Width	mm(ft-in)	785(2' 7")
Wt	Weight	kg(lb)	3040(6700)


※ 6.45m(21' 2") boom with arm cylinder(Included piping and pins).

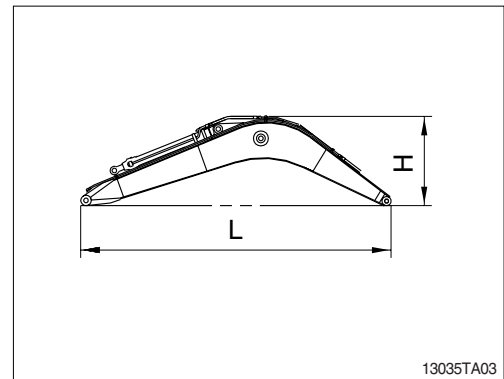

(3) ARM ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	4340(14' 3")
H	Height	mm(ft-in)	955(3' 2")
W	Width	mm(ft-in)	435(1' 5")
Wt	Weight	kg(lb)	1780(3920)


※ 3.2m(10' 6") arm with bucket cylinder(Included linkage and pins).

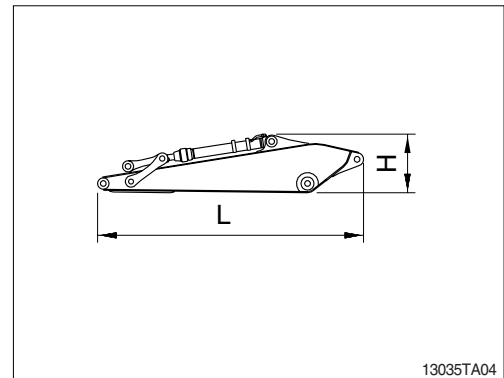

(4) BUCKET ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1840(6' 0")
H	Height	mm(ft-in)	1120(3' 8")
W	Width	mm(ft-in)	1535(5' 0")
Wt	Weight	kg(lb)	1110(2450)


※ 1.44m³(1.88yd³) SAE heaped bucket(Included tooth and side cutters).

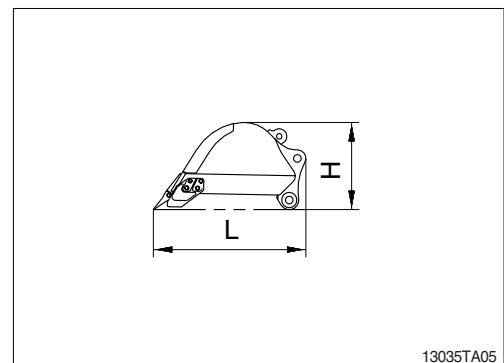

(5) BOOM CYLINDER


Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2305(7' 7")
H	Height	mm(ft-in)	276(0'11")
W	Width	mm(ft-in)	420(1' 5")
Wt	Weight(2EA)	kg(lb)	560(1235)

※ Included piping.

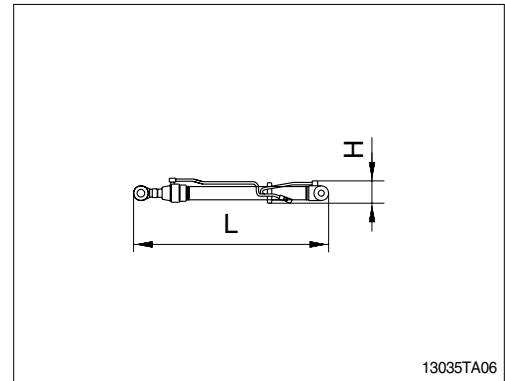


(6) CAB ASSEMBLY

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	1962(6' 4")
H	Height	mm(ft-in)	1676(5' 5")
W	Width	mm(ft-in)	1288(4' 2")
Wt	Weight	kg(lb)	310(680)

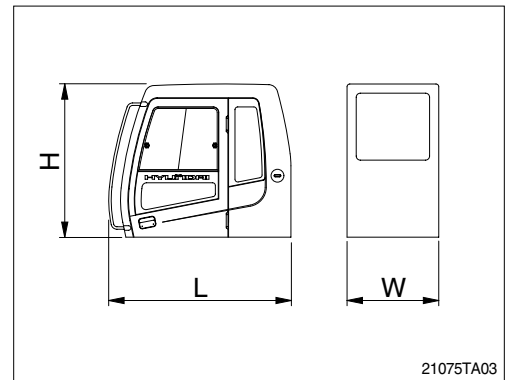

(7) COUNTERWEIGHT

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	2980(9' 9")
H	Height	mm(ft-in)	1145(3' 9")
W	Width	mm(ft-in)	590(1'11")
Wt	Weight	kg(lb)	6200(13670)

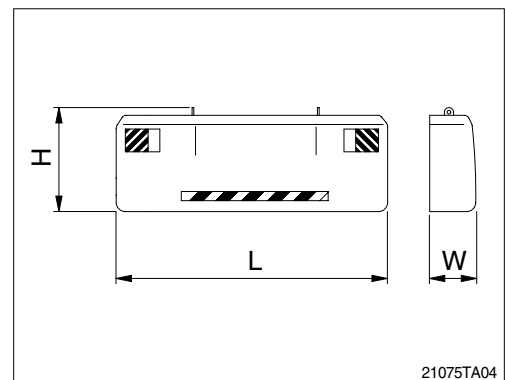


2) R320NLC-7A

(1) BASE MACHINE

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	5730(18'10")
H	Height	mm(ft-in)	3090(10' 2")
W	Width	mm(ft-in)	2990(9' 10")
Wt	Weight	kg(lb)	26000(57320)

※ With 600mm(24") triple grouser shoes and 6200kg (13670lb) counterweight.

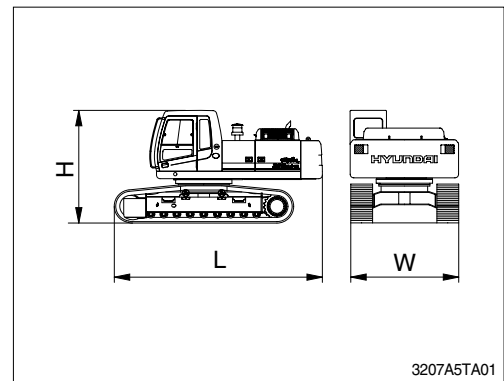

3) R320LC-7A HIGH WALKER

Mark	Description	Unit	Specification
L	Length	mm(ft-in)	5730(18'10")
H	Height	mm(ft-in)	3390(11' 1")
W	Width	mm(ft-in)	3470(11' 5")
Wt	Weight	kg(lb)	28700(63270)

※ With 600mm(24") triple grouser shoes and 6200kg (13670lb) counterweight.

