

SECTION 1 GENERAL

Group 1	Safety hints	1-1
Group 2	Specifications	1-4
Group 3	Periodic replacement	1-19


GROUP 1 SAFETY HINTS

Careless performing of the easy work may cause injuries.


Take care to always perform work safely, at least observing the following.

- Oil is a dangerous substance. Never handle oil, grease or oily clothes in places where there is any fire of flame.


As preparation in case of fire, always know the location and directions for use of fire extinguishers and other fire fighting equipment.

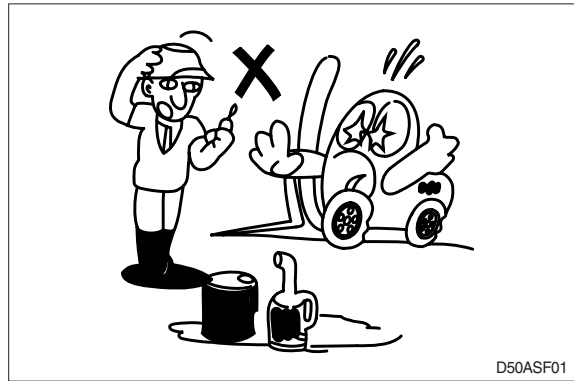

- Wear well-fitting helmet, safety shoes and working clothes. When drilling, grinding or hammering, always wear protective goggles. Always do up safety clothes properly so that they do not catch on protruding parts of machines. Do not wear oily clothes. When checking, always release battery plug.

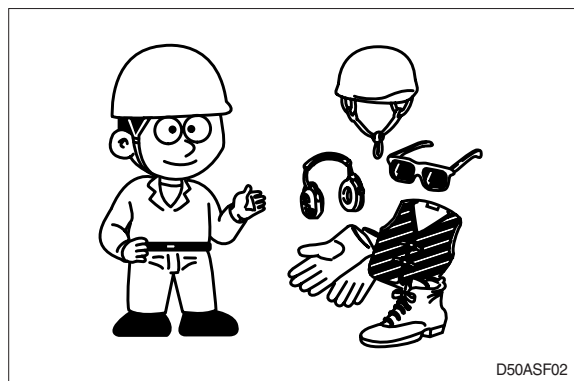

- Flames should never be used instead of lamps. Never use a naked flame to check leaks or the level of oil or electrolyte.

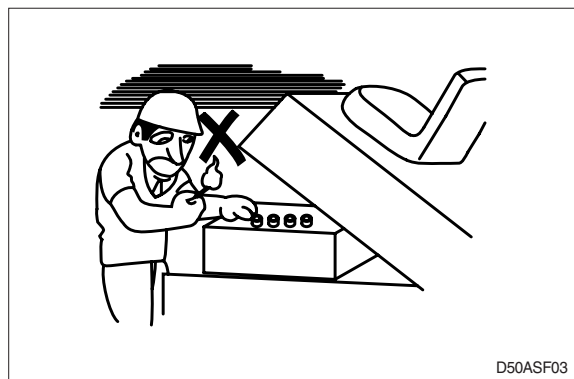

- When working on top of the machine, be careful not to lose your balance and fall.



- Hand a caution sign in the operator's compartment (For example **Do not start** or **Maintenance in progress**).


This will prevent anyone from starting or moving the machine by mistake.




When inspecting running parts or near such parts, always stop the machine first.

Before checking or servicing accumulator or piping, depress brake pedal repeatedly to release pressure.


- Park the machine on firm, flat ground.
Lower the fork to the ground and stop the engine.
Return each lever to **NEUTRAL** and apply the brake lock.

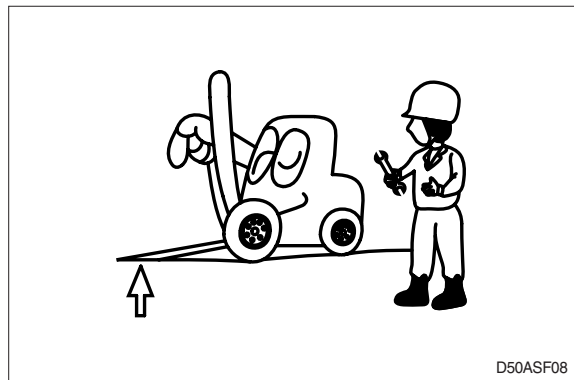


- Immediately remove any oil or grease on the floor of the operator's compartment, or on the handrail. It is very dangerous if someone slips while on the machine.

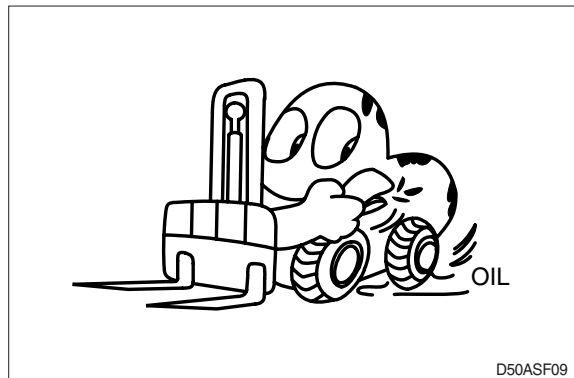

- When working with others, choose a group leader and work according to his instructions. Do not perform any maintenance beyond the agreed work.

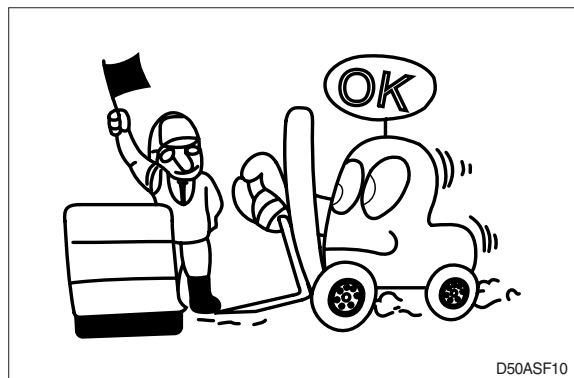

- Always remember that the hydraulic oil circuit is under pressure. When feeding or draining the oil or carrying out inspection and maintenance, release the pressure first.

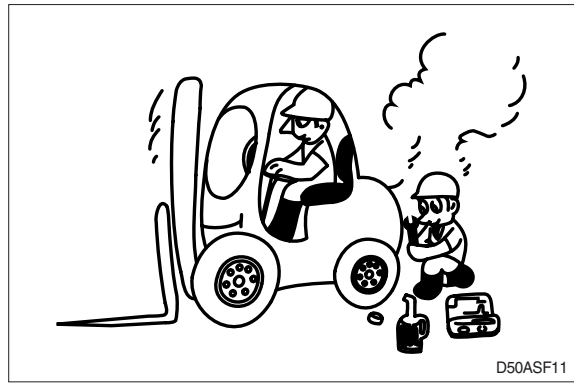


D50ASF11

- Thoroughly clean the machine. In particular, be careful to clean the filler caps, grease fittings and the area around the dipsticks. Be careful not to let any dirt or dust into the system.
- Always use HYUNDAI Forklift genuine parts for replacement.
- Always use the grades of grease and oil recommended by HYUNDAI Forklift. Choose the viscosity specified for the ambient temperature.
- Always use pure oil or grease, and be sure to use clean containers.
- When checking or changing the oil, do it in a place free of dust, and prevent any dirt from getting into the oil.
- Before draining the oil, warm it up to a temperature of 30 to 40°C.
- After replacing oil, filter element or strainer, bleed the air from circuit.
- When the strainer is located in the oil filler, the strainer must not be removed while adding oil.
- When changing the oil filter, check the drained oil and filter for any signs of excessive metal particles or other foreign materials.
- When removing parts containing O-ring, gaskets or seals, clean the mounting surface and replace with new sealing parts.
- After injecting grease, always wipe off the oil grease that was forced out.
- Do not handle electrical equipment while wearing wet places, as this can cause electric shock.
- During maintenance do not allow any unauthorized person to stand near the machine.
- Be sure you fully understand the contents of the operation. It is important to prepare necessary tools and parts and to keep the operating area clean.
- When checking an open gear case there is a risk of dropping things in. Before removing the covers to inspect such cases, empty everything from your pockets. Be particularly careful to remove wrenches and nuts.
- Way to use dipstick
Push the dipstick fully into the guide, and then pull out.

Carrying out other difficult maintenance work carelessly can cause unexpected accidents. If you consider the maintenance is too difficult, always request the HYUNDAI Forklift distributor to carry out it.

GROUP 2 SPECIFICATIONS

1. GENERAL LOCATIONS

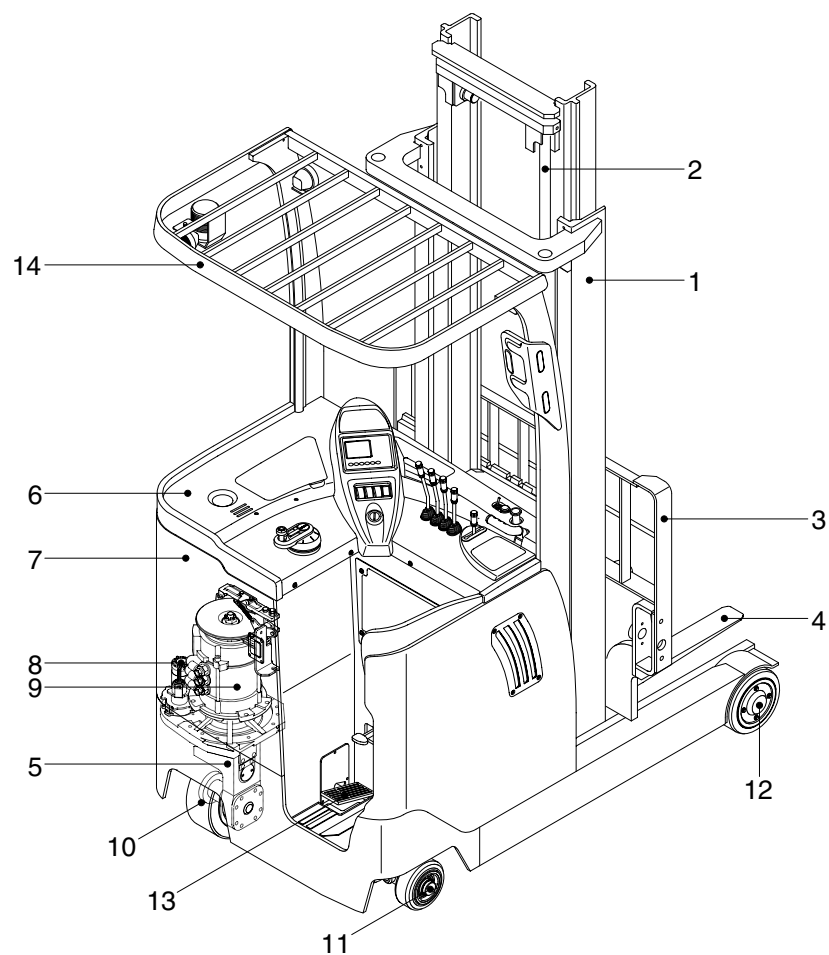


18BR9OM113

- | | | |
|-------------------------|----------------|-------------------|
| 1 Mast | 6 Dash board | 11 Caster wheel |
| 2 Lift cylinder | 7 Frame | 12 Load wheel |
| 3 Carriage and backrest | 8 EPS motor | 13 Brake pedal |
| 4 Forks | 9 Drive motor | 14 Overhead guard |
| 5 Drive unit | 10 Drive wheel | |

2. SPECIFICATIONS

1) 10/13BR-9

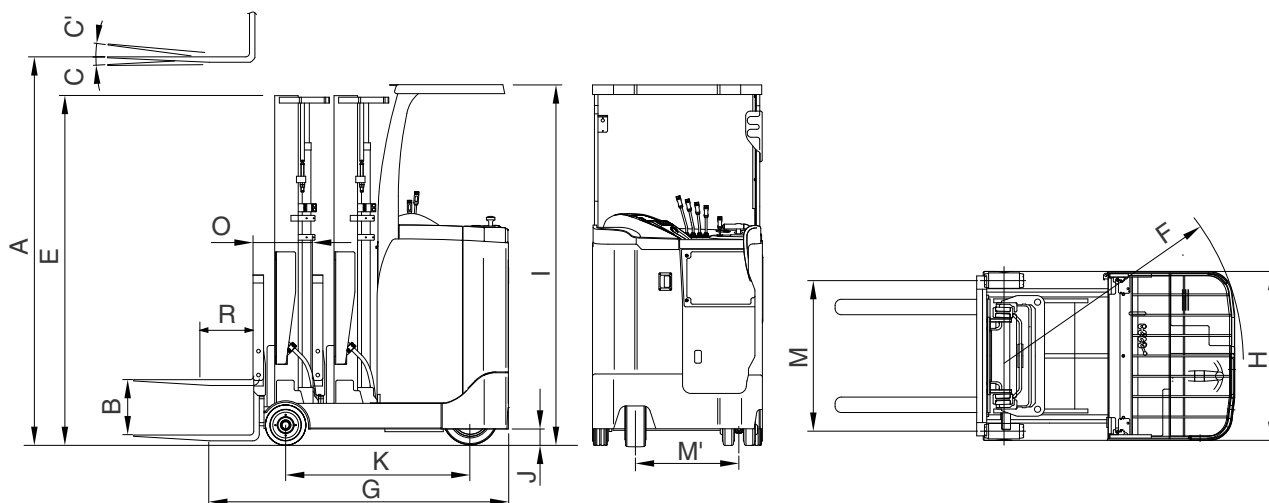


18BR9SP01

Model			Unit	10BR-9	13BR-9
Capacity			kg (lb)	1000 (2000)	1250 (2500)
Load center	R		mm (in)	500 (24")	←
Weight (Unloaded, with battery)			kg (lb)	2105 (4640)	2115 (4660)
Fork	Lifting height	A	mm (ft-in)	3000 (9' 10")	←
	Free lift	B	mm (in)	232 (9.1")	←
	Lifting speed (Unload/Load)		mm/sec	500/320	500/300
	Lowering speed (Unload/Load)		mm/sec	450/500	←
	L × W × T	L, W, T	mm (in)	900 × 100 × 35 (35.4 × 3.9 × 1.4)	←
Mast	Tilt angle (forward/backward)	C/C'	degree	5/5	←
	Max height	D	mm (ft-in)	4025 (13' 3")	←
	Min height	E	mm (ft-in)	1991 (6' 6")	←
Body	Travel speed (Unload)		km/h	11.5	←
	Gradeability (Unload/Load)		%	33/21	32/19
	Min turning radius (Outside)	F	mm (ft-in)	1405 (4' 7")	1438 (4' 9")
ETC	Max hydraulic pressure		kgf/cm ²	135	←
	Hydraulic oil tank		l (usgal)	18 (4.76)	←
Overall length (With fork at reach in)		G	mm (ft-in)	2106 (6' 11")	←
Overall width (Load wheel)		H	mm (ft-in)	1070 (3' 6")	←
Overhead guard height		I	mm (ft-in)	2260 (7' 5")	←
Ground clearance		J	mm (in)	94 (3.7")	←
Wheel base		K	mm (ft-in)	1115 (3' 8")	1150 (3' 9")
Wheel tread (Front/rear)		M/M'	mm (ft-in)	970 *1070/613 (3' 2" *3' 6"/2' 0")	←
Reach stroke		O	mm (ft-in)	330 (1' 1")	365 (1' 2")

* Wide frame

2) 15/18/20BR-9

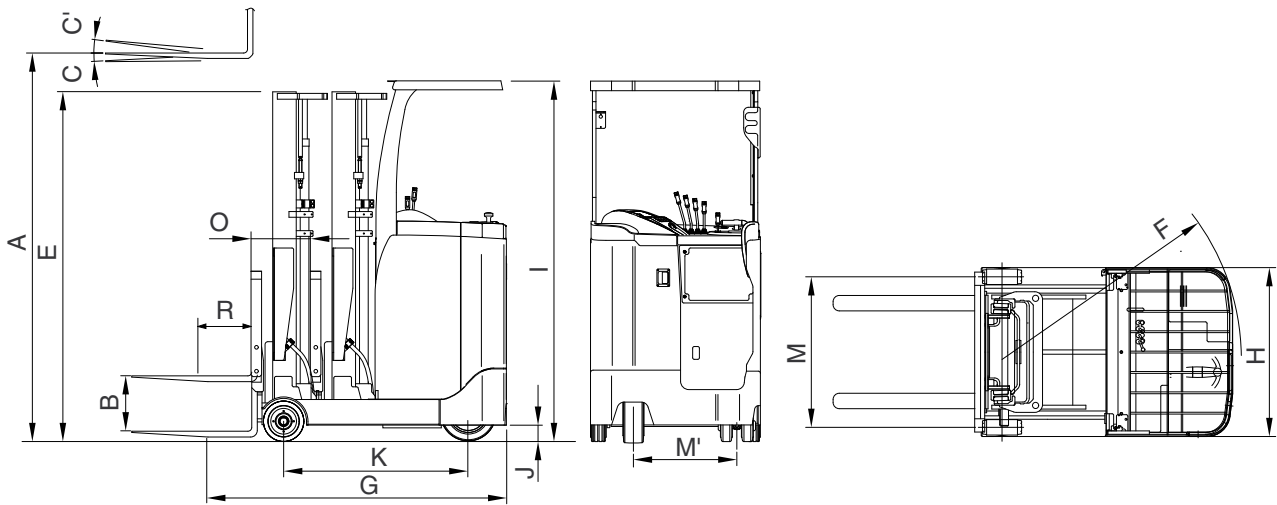


18BR9SP01

Model			Unit	15BR-9	18BR-9	20BR-9
Capacity			kg (lb)	1500 (3000)	1800 (3500)	2000 (4000)
Load center	R		mm (in)	500 (24")	←	←
Weight (Unloaded, with battery)			kg (lb)	2310 (5090)	2334 (5145)	2657 (5860)
Fork	Lifting height	A	mm (ft-in)	3000 (9' 10")	←	←
	Free lift	B	mm (in)	232 (9.1")	←	←
	Lifting speed (Unload/Load)		mm/sec	550/340	550/320	470/300
	Lowering speed (Unload/Load)		mm/sec	450/500	←	←
	L×W×T	L,W,T	mm (in)	900×100×35 (35.4×3.9×1.4)	←	1050×100×45 (41.3×3.9×1.8)
Mast	Tilt angle (forward/backward)	C/C'	degree	5/5	←	←
	Max height	D	mm (ft-in)	4025 (13' 3")	←	←
	Min height	E	mm (ft-in)	1991 (6' 6")	←	←
Body	Travel speed (Unload)		km/h	11	←	11.5
	Gradeability (Unload/Load)		%	50/27	49/25	45/23
	Min turning radius (Outside)	F	mm (ft-in)	1596 (5' 3")	1775 (5' 10")	1790 (5' 10")
ETC	Max hydraulic pressure		kgf/cm ²	190	←	←
	Hydraulic oil tank		l (usgal)	18 (4.76)	←	←
Overall length (With fork at reach in)		G	mm (ft-in)	2189 (7' 2")	2156 (7' 1")	2311 (7' 7")
Overall width (Load wheel)		H	mm (ft-in)	1070 (3' 6")	←	←
Overhead guard height		I	mm (ft-in)	2260 (7' 5")	←	←
Ground clearance		J	mm (in)	94 (3.7")	79 (3.1")	←
Wheel base		K	mm (ft-in)	1315 (4' 4")	1500 (4' 11")	←
Wheel tread (Front/rear)		M/M'	mm (ft-in)	970 *1070/613 (3' 2" *3' 6"/2' 0")	←	994 *1094/613 (3' 3" *3' 7"/2' 0")
Reach stroke		O	mm (ft-in)	447 (1' 6")	665 (2' 2")	←

* Wide frame

3) 25/30BR-9

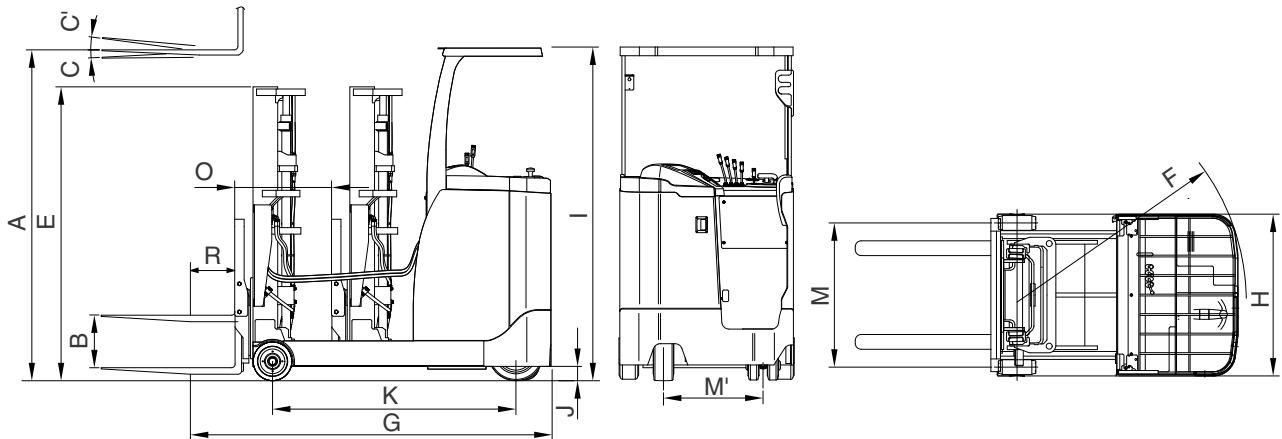

30BR9SP01

Model			Unit	25BR-9	30BR-9
Capacity			kg (lb)	2500 (5000)	3000 (6000)
Load center		R	mm (in)	500 (24")	←
Weight (Unloaded, with battery)			kg (lb)	2862 (6310)	3202 (7060)
Fork	Lifting height	A	mm (ft-in)	3000 (9' 10")	←
	Free lift	B	mm (in)	248 (9' 1")	←
	Lifting speed (Unload/Load)		mm/sec	470/280	430/220
	Lowering speed (Unload/Load)		mm/sec	450/500	←
	L × W × T	L,W,T	mm (in)	1050 × 100 × 45 (41.3 × 3.9 × 1.8)	←
Mast	Tilt angle (forward/backward)	C/C'	degree	5/5	←
	Max height	D	mm (ft-in)	4030 (13' 3")	←
	Min height	E	mm (ft-in)	2025 (6' 8")	←
Body	Travel speed (Unload)		km/h	12	11
	Gradeability (Unload/Load)		%	30/15	26/13
	Min turning radius (Outside)	F	mm (ft-in)	1980 (6' 6")	2077 (6' 10")
ETC	Max hydraulic pressure		kgf/cm ²	190	←
	Hydraulic oil tank		l (usgal)	24 (6.34)	←
Overall length (With fork at reach in)		G	mm (ft-in)	2373 (7' 9")	2403 (7' 11")
Overall width (Load wheel)		H	mm (ft-in)	1200 (3' 11")	1212 (4' 0")
Overhead guard height		I	mm (ft-in)	2294 (7' 6")	←
Ground clearance		J	mm (in)	85 (3.3")	78 (3.1")
Wheel base		K	mm (ft-in)	1695 (5' 7")	1795 (5' 11")
Wheel tread (Front/rear)		M/M'	mm (ft-in)	1060 *1180/689 (3' 6" *3' 10"/2' 3")	1075 *1195/689 (3' 6" *3' 11"/2' 3")
Reach stroke		O	mm (ft-in)	807 (2' 8")	877 (2' 11")

* Wide frame

3. SPECIFICATION FOR MAJOR COMPONENTS

1) 10/13BR-9

(1) MOTOR

Item	Unit	Drive motor	Hydraulic pump motor
Model	-	AMDD4004	ABDD4002
Type	-	AC	←
Rated voltage	Vac	30V 3 ø	←
Output	kW	4.5	14
Insulation	-	Class F	←

(2) BATTERY

Item	Unit	10BR-9	13BR-9
Model	-	VCF198	
Rated voltage	V	48	
Capacity	AH/hr	198/5	
Electrolyte	-	WET	
Dimension (W×D×H)	mm	994×270×581.7	
Connector (CE spec)	-	SB350 (SBE320)	
Weight	kg	370	

(3) CHARGER

Item	Unit	10/13BR-9
Type	-	Constant current, constant voltage
Battery capacity for charge	V-AH	48-198~230
AC input	V	Triple phase 410
		Single phase 220
		Triple phase 220/380
		Triple phase 440
DC output	V	64±1
Charge time	hr	6±2
Connector (CE spec)	-	SB350 (SBE320)

(4) GEAR PUMP

Item	Unit	Specification
Type	—	Fixed displacement gear pump
Capacity	cc/rev	16.5
Maximum operating pressure	bar	210
Rated speed (max/min)	rpm	3000/500

(5) MAIN CONTROL VALVE

Item	Unit	Specification
Type	-	3 spool, 4 spool
Operating method	-	Mechanical
Main relief valve pressure	bar	135

(6) DRIVE UNIT

Item	Unit	Specification
Gear ratio	-	20.125
Oil quantity	l	1.6

(7) WHEELS

Item	10/13BR-9
Type (Load / Drive /Caster)	Urethane / Rubber / Rubber
Quantity (Load / Drive /Caster)	2 / 1 / 2
Load wheel	254 × 100
Drive wheel	306 × 127
Caster wheel	178 × 73

(8) BRAKES

Item	Specification
Brakes (Service & Parking)	Disc brake.

2) 15/18/20BR-9

(1) MOTOR

Item	Unit	Drive motor	Hydraulic pump motor
Model	-	AMDG9001	ABDD4002
Type	-	AC	←
Rated voltage	Vac	30V 3 ø	←
Output	kW	6	14
Insulation	-	Class F	←

(2) BATTERY

Item	Unit	15/18BR-9	20BR-9
Model	-	VCF 280	VCI 300
Rated voltage	V	48	←
Capacity	AH/hr	280/5	300/5
Electrolyte	-	WET	←
Dimension (W×D×H)	mm	994×378×581.7	←
Connector (CE spec)	-	SB350 (SBE320)	←
Weight	kg	480	500

(3) CHARGER

Item	Unit	15/18/20BR-9
Type	-	Constant current, constant voltage
Battery capacity for charge	V-AH	48-280~365
AC input	V	Triple phase 410
		Single phase 220
		Triple phase 220/380
		Triple phase 440
DC output	V	64±1
Charge time	hr	6±2
Connector (CE spec)	-	SB 350 (SBE320)

(4) GEAR PUMP

Item	Unit	Specification
Type	—	Fixed displacement gear pump
Capacity	cc/rev	19.6
Maximum operating pressure	bar	210
Rated speed (max/min)	rpm	3000/500

(5) MAIN CONTROL VALVE

Item	Unit	Specification
Type	-	3 spool, 4 spool
Operating method	-	Mechanical
Main relief valve pressure	bar	190

(6) DRIVE UNIT

Item	Unit	Specification
Gear ratio	-	20.125
Oil quantity	l	1.6

(7) WHEELS

Item	15/18BR-9	20BR-9
Type (Load / Drive / Caster)	Urethane / Rubber / Rubber	←
Quantity (Load / Drive / Caster)	2 / 1 / 2	←
Load wheel	254 × 100	267 × 114
Drive wheel	306 × 145	←
Caster wheel	178 × 73	←

(8) BRAKES

Item	Specification
Brakes (Service & Parking)	Disc brake.

3) 25/30BR-9

(1) MOTOR

Item	Unit	Drive motor	Hydraulic pump motor
Model	-	AMDG9001	ABDD4002
Type	-	AC	←
Rated voltage	Vac	30V 3 ∅	←
Output	kW	6	14
Insulation	-	Class F	←

(2) BATTERY

Item	Unit	25BR-9	30BR-9
Model (Type)	-	VCI 300	VCI 365
Rated voltage	V	48	←
Capacity	AH/hr	300/5	365/5
Electrolyte	-	WET	←
Dimension (W×D×H)	mm	994×378×581.7	←
Connector (CE spec)	-	SB350 (SBE320)	←
Weight	kg	500	580

(3) CHARGER

Item	Unit	25/30BR-9
Type	-	Constant current, constant voltage
Battery capacity for charge	V-AH	48-280~365
AC input	V	Triple phase 410
		Single phase 220
		Triple phase 220/380
		Triple phase 440
DC output	V	64±1
Charge time	hr	6±2
Connector (CE spec)	-	SB 350 (SBE320)

(4) GEAR PUMP

Item	Unit	Specification
Type	—	Fixed displacement gear pump
Capacity	cc/rev	19.6
Maximum operating pressure	bar	210
Rated speed (max/min)	rpm	3000/500

(5) MAIN CONTROL VALVE

Item	Unit	25BR-9	30BR-9
Type	-	3 spool, 4 spool	←
Operating method	-	Mechanical	←
Main relief valve pressure	bar	190	210

(6) DRIVE UNIT

Item	Unit	Specification
Gear ratio	-	20.5
Oil quantity	l	6

(7) WHEELS

Item	25BR-9	30BR-9
Load / Drive / Caster	Urethane / Rubber / Rubber	←
Quantity (Load / Drive / Caster)	2 / 1 / 2	←
Load wheel	267 × 114	267 × 135
Drive wheel	382 × 142	←
Caster wheel	204 × 76	←

(8) BRAKES

Item	Specification
Brakes (Service & Parking)	Disc brake.

4. TIGHTENING TORQUE FOR MAJOR COMPONENTS

1) 10/13BR-9

NO	Items		Size	kgf · m	lbf · ft
1	Electric system	Hyd pump motor mounting bolt	M 8×1.25	3.9±0.2	28.2±1.4
2		Drive motor mounting bolt	M 8×1.25	3.9±0.2	28.2±1.4
3		EPS motor mounting bolt	M 8×1.25	3.9±0.2	28.2±1.4
4	Hydraulic system	Hydraulic pump mounting bolt	M10×1.5	5±1.0	36.2±7.2
5		MCV mounting bolt, nut	M 8×1.25	2.5±0.5	18.1±3.6
6	Power train system	Drive wheel mounting bolt	M16×1.5	22±2	159±14.4
7		Load wheel mounting nut	M40×1.5	5±0.5	36.2±3.6
8		Caster wheel mounting bolt	M12×1.75	12.0±1.0	89.8±7.2
9		Drive unit bracket mounting bolt	M12×1.75	14.3±1.0	103.4±7.2
10	Other	Head guard mounting bolt	M14×2.0	19±3.0	137.4±21.7

2) 15/18/20BR-9

NO	Items		Size	kgf · m	lbf · ft
1	Electric system	Hyd pump motor mounting bolt	M 8×1.25	3.9±0.2	28.2±1.4
2		Drive motor mounting bolt	M 8×1.25	3.9±0.2	28.2±1.4
3		EPS motor mounting bolt	M 8×1.25	3.9±0.2	28.2±1.4
4	Hydraulic system	Hydraulic pump mounting bolt	M10×1.5	5±1.0	36.2±7.2
5		MCV mounting bolt, nut	M 8×1.25	2.5±0.5	18.1±3.6
6	Power train system	Drive wheel mounting bolt	M16×1.5	22±2	159±14.4
7		Load wheel mounting nut	M40×1.5	5±0.5	36.2±3.6
8		Caster wheel mounting bolt	M12×1.75	12.0±1.0	89.8±7.2
9		Drive unit bracket mounting bolt	M12×1.75	14.3±1.0	103.4±7.2
10	Other	Head guard mounting bolt	M14×2.0	19±3.0	137.4±21.7

3) 25/30BR-9

NO	Items		Size	kgf · m	lbf · ft
1	Electric system	Hyd pump motor mounting bolt	M 8 × 1.25	3.9 ± 0.2	28.2 ± 1.4
2		Drive motor mounting bolt	M 8 × 1.25	3.9 ± 0.2	28.2 ± 1.4
3		EPS motor mounting bolt	M 8 × 1.25	3.9 ± 0.2	28.2 ± 1.4
4	Hydraulic system	Hydraulic pump mounting bolt	M10 × 1.5	5 ± 1.0	36.2 ± 7.2
5		MCV mounting bolt, nut	M 8 × 1.25	2.5 ± 0.5	18.1 ± 3.6
6	Power train system	Drive unit mounting bolt, nut	M12 × 1.75	14.3 ± 1.0	103.4 ± 7.2
7		Drive wheel mounting nut	M14 × 1.5	14 ± 1.5	101.2 ± 10.8
8		Load wheel mounting nut	M50 × 1.5	5 ± 0.5	36.2 ± 3.6
9		Caster wheel mounting bolt	M12 × 1.75	12 ± 1.0	89.8 ± 7.2
10		Drive unit bracket mounting bolt	M12 × 1.75	14.3 ± 1.0	103.4 ± 7.2
11	Other	Head guard mounting bolt	M14 × 2.0	19 ± 3.0	137.4 ± 21.7

5. TORQUE CHART

Use following table for unspecified torque.

1) BOLT AND NUT

(1) Coarse thread

Bolt size	8T		10T	
	kgf · m	lbf · ft	kgf · m	lbf · ft
M 6 × 1.0	0.85 ~ 1.25	6.15 ~ 9.04	1.14 ~ 1.74	8.2 ~ 12.6
M 8 × 1.25	2.0 ~ 3.0	14.5 ~ 21.7	2.73 ~ 4.12	19.7 ~ 29.8
M10 × 1.5	4.0 ~ 6.0	28.9 ~ 43.4	5.5 ~ 8.3	39.8 ~ 60
M12 × 1.75	7.4 ~ 11.2	53.5 ~ 79.5	9.8 ~ 15.8	71 ~ 114
M14 × 2.0	12.2 ~ 16.6	88.2 ~ 120	16.7 ~ 22.5	121 ~ 167
M16 × 2.0	18.6 ~ 25.2	135 ~ 182	25.2 ~ 34.2	182 ~ 247
M18 × 2.5	25.8 ~ 35.0	187 ~ 253	35.1 ~ 47.5	254 ~ 343
M20 × 2.5	36.2 ~ 49.0	262 ~ 354	49.2 ~ 66.6	356 ~ 482
M22 × 2.5	48.3 ~ 63.3	350 ~ 457	65.8 ~ 98.0	476 ~ 709
M24 × 3.0	62.5 ~ 84.5	452 ~ 611	85.0 ~ 115	615 ~ 832
M30 × 3.5	124 ~ 168	898 ~ 1214	169 ~ 229	1223 ~ 1655
M36 × 4.0	174 ~ 236	1261 ~ 1703	250 ~ 310	1808 ~ 2242

(2) Fine thread

Bolt size	8T		10T	
	kgf · m	lbf · ft	kgf · m	lbf · ft
M 8 × 1.0	2.17 ~ 3.37	15.7 ~ 24.3	3.04 ~ 4.44	22.0 ~ 32.0
M10 × 1.25	4.46 ~ 6.66	32.3 ~ 48.2	5.93 ~ 8.93	42.9 ~ 64.6
M12 × 1.25	7.78 ~ 11.58	76.3 ~ 83.7	10.6 ~ 16.0	76.6 ~ 115
M14 × 1.5	13.3 ~ 18.1	96.2 ~ 130	17.9 ~ 24.1	130 ~ 174
M16 × 1.5	19.9 ~ 26.9	144 ~ 194	26.6 ~ 36.0	193 ~ 260
M18 × 1.5	28.6 ~ 43.6	207 ~ 315	38.4 ~ 52.0	278 ~ 376
M20 × 1.5	40.0 ~ 54.0	289 ~ 390	53.4 ~ 72.2	386 ~ 522
M22 × 1.5	52.7 ~ 71.3	381 ~ 515	70.7 ~ 95.7	512 ~ 692
M24 × 2.0	67.9 ~ 91.9	491 ~ 664	90.9 ~ 123	658 ~ 890
M30 × 2.0	137 ~ 185	990 ~ 1338	182 ~ 248	1314 ~ 1795
M36 × 3.0	192 ~ 260	1389 ~ 1879	262 ~ 354	1893 ~ 2561

2) PIPE AND HOSE(FLARE TYPE)

Thread size	Width across flat (mm)	kgf · m	lbf · ft
1/4"	19	4	28.9
3/8"	22	5	36.2
1/2"	27	9.5	68.7
3/4"	36	18	130
1"	41	21	152
1-1/4"	50	35	253

3) PIPE AND HOSE(ORFS TYPE)

Thread size	Width across flat (mm)	kgf · m	lbf · ft
9/16-18	19	4	28.9
11/16-16	22	5	36.2
13/16-16	27	9.5	68.7
1-3/16-12	36	18	130
1-7/16-12	41	21	152
1-11/16-12	50	35	253

4) FITTING

Thread size	Width across flat (mm)	kgf · m	lbf · ft
1/4"	19	4	28.9
3/8"	22	5	36.2
1/2"	27	9.5	68.7
3/4"	36	18	130
1"	41	21	152
1-1/4"	50	35	253

6. RECOMMENDED LUBRICANTS

Use only oils listed below or equivalent.

Do not mix different brand oil.

Service point	Kind of fluid	Capacity <i>l</i> (U.S. gal)		Ambient temperature °C (°F)								
		10/13/15/ 18/20BR-9	25/30BR-9	-50 (-58)	-30 (-22)	-20 (-4)	-10 (14)	0 (32)	10 (50)	20 (68)	30 (86)	40 (104)
Drive unit	Gear oil	1.6 (0.42)	6.0 (1.59)									
Hydraulic oil tank	Hydraulic oil	18.1 (4.0)	24 (5.3)									
Fitting (Grease nipple)	Grease	0.1 (0.03)	0.1 (0.03)									

★ : Cold region
Russia, CIS, Mongolia

GROUP 3 PERIODIC REPLACEMENT

For operation safety, never fail to perform periodic maintenance or make periodic replacement of the consumable parts listed in the following.

These parts may deteriorate in time and are susceptible to wear. It is difficult to estimate the degree of wear at time of periodic maintenance; therefore, even if no apparent wear is found, always replace with new parts within the prescribed period of replacement (Or earlier if trouble is found).

Note that periodic replacement has nothing to do with guarantee service.

※ **Replacement of consumable service parts is not covered under warranty.**

No.	Description	Period of replacement
1	Hydraulic oil	Every 1 year
2	Brake fluid	Every 1 year
3	Differential oil	Every 1 year
4	Gear oil	Every 1 year
5	Wheel bearing grease	Every 1 year
6	Power steering hose	Every 1 year
7	Rubber parts of the power steering inside	Every 2 year
8	Cups and dust seals etc. of cylinder	Every 2 year
9	Reservoir tank tube	Every 1 year
10	Lift chain	Every 2 year
11	Hydraulic equipment hose	Every 2 year
12	Brake switch(hydraulic)	Every 2 year